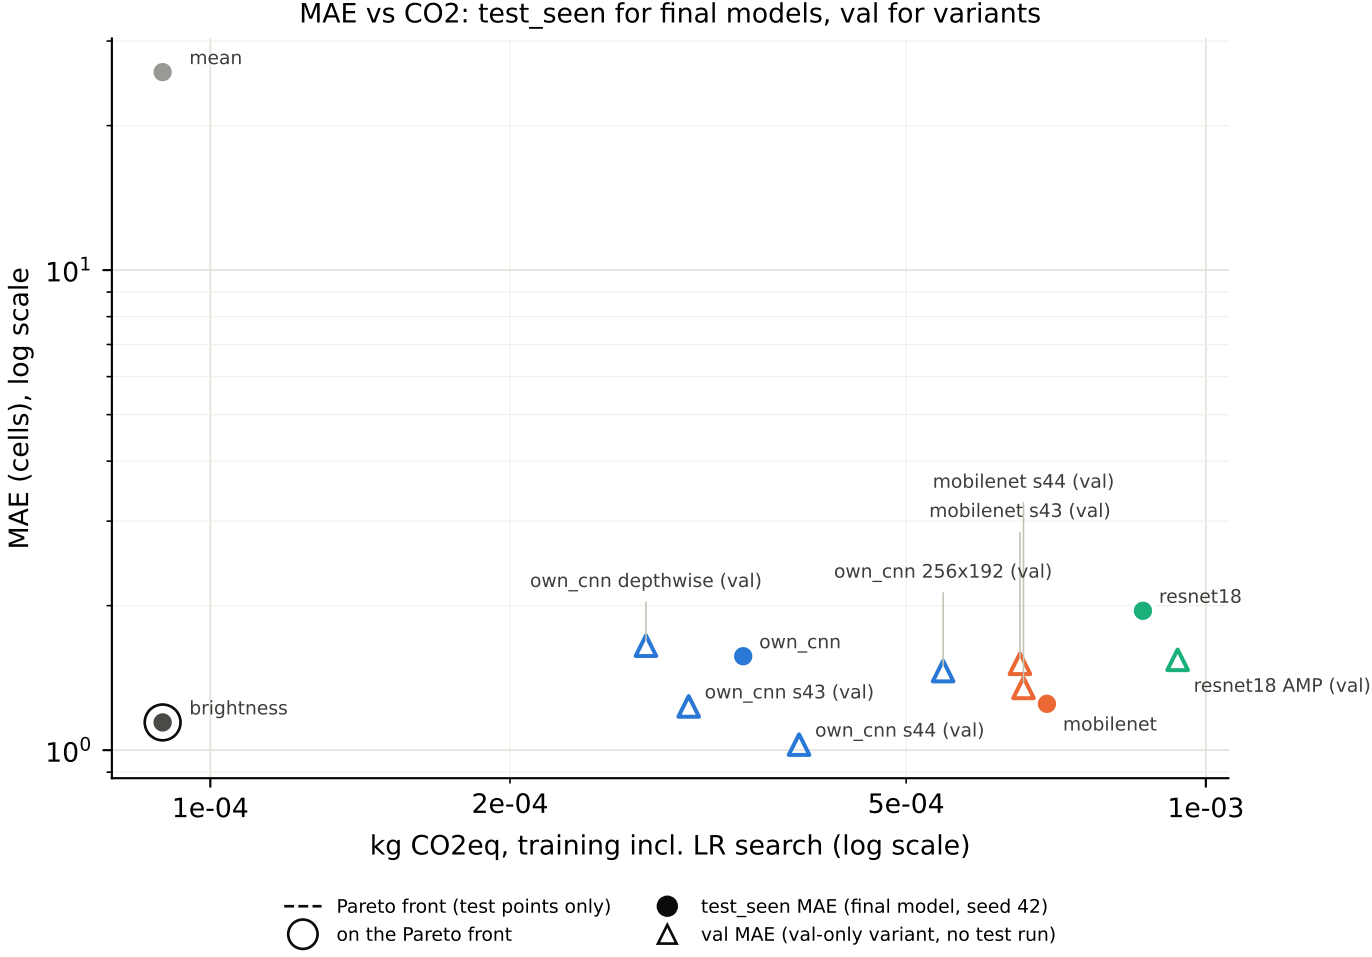

x of a val-only variant = its own training run + its parent's LR search (the only runs that belong to it), in both versions.
x of a baseline = the run that fitted it (training) or that run's model total plus all baseline-fit runs (project).