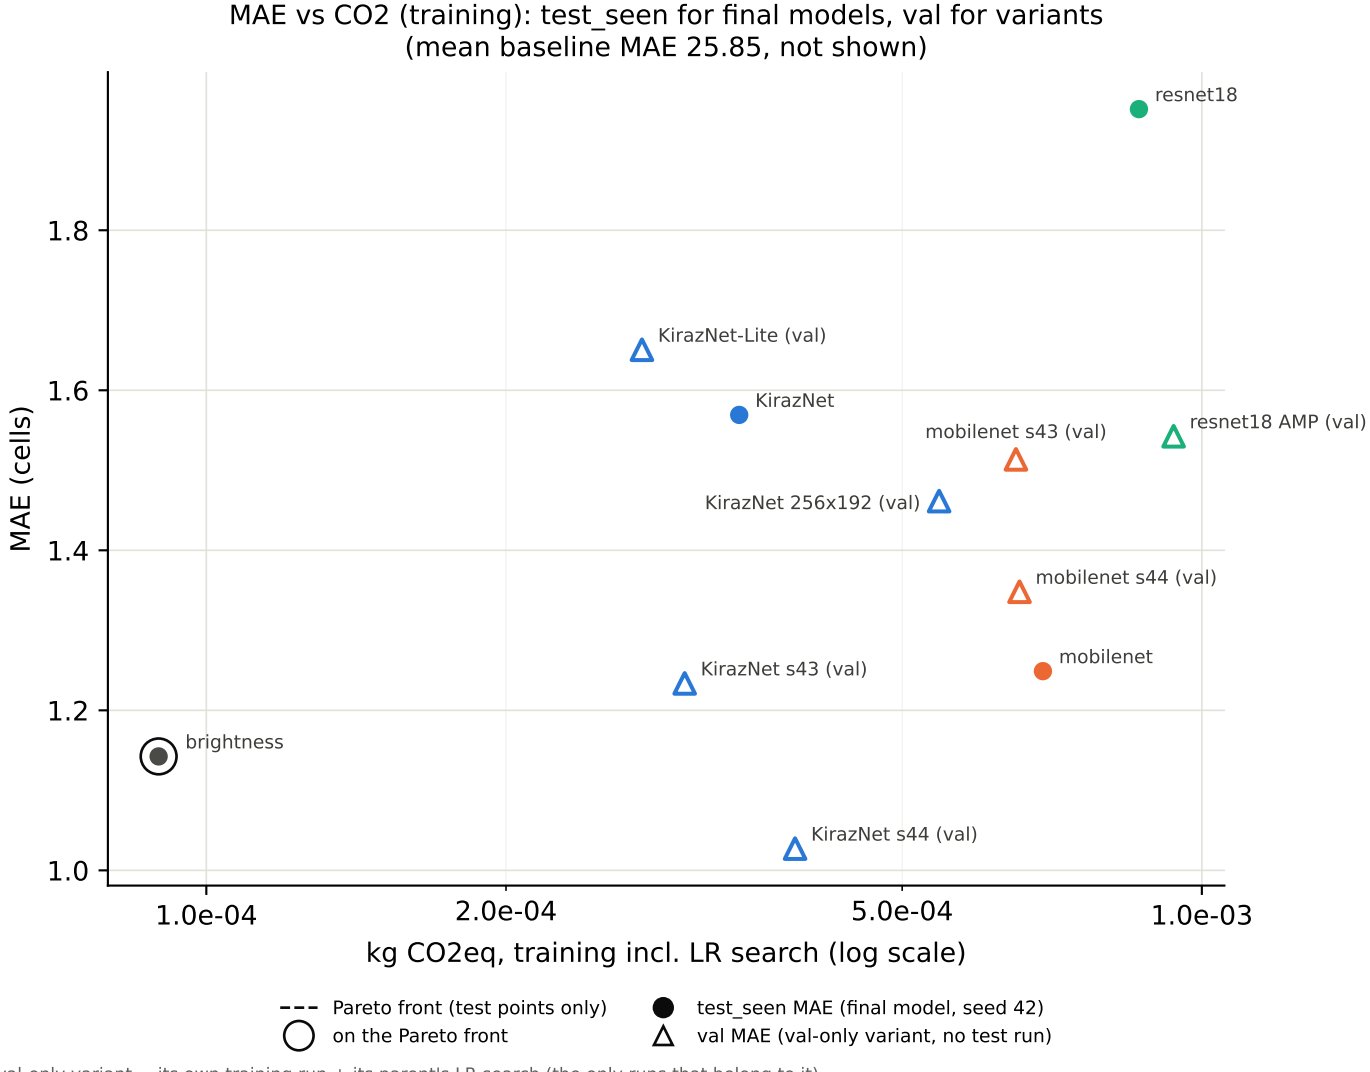

x of a val-only variant = its own training run + its parent's LR search (the only runs that belong to it).
x of brightness = the run that fitted it.