


Test-Cases


Input	Output
The character “a”	Invert it to “A”
Multiple characters “good”	Invert it to “GOOD”
Multiple characters “good” with special char “?”	Invert it to “GOOD?”
Multiple characters “good” with multiple integers “1412”	Invert it to “GOOD1412”

Test-Case 1:

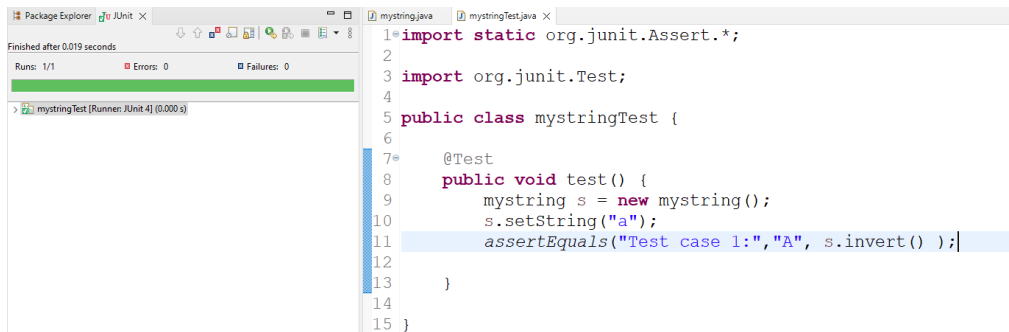


```
1 import static org.junit.Assert.*;
2
3 import org.junit.Test;
4
5 public class mystringTest {
6
7     @Test
8     public void test() {
9         mystring s = new mystring();
10        s.setString("a");
11        assertEquals("Test case 1:", "A", s.invert() );
12    }
13 }
14
15 }
```

Test-Case 2:

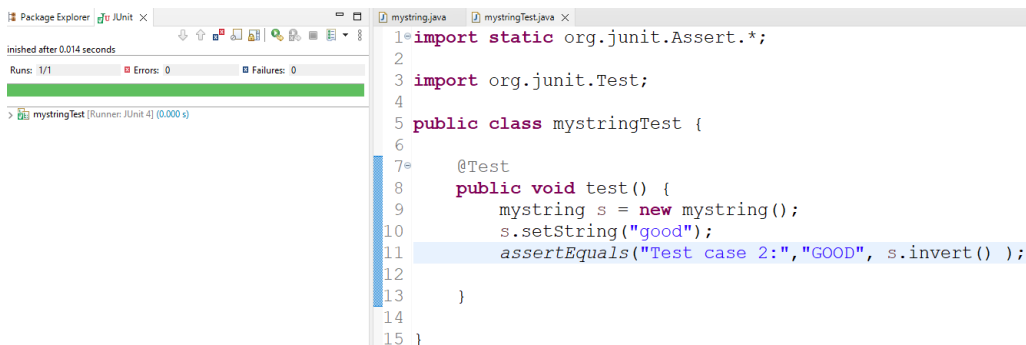


```
1 import static org.junit.Assert.*;
2
3 import org.junit.Test;
4
5 public class mystringTest {
6
7     @Test
8     public void test() {
9         mystring s = new mystring();
10        s.setString("good");
11        assertEquals("Test case 2:", "GOOD", s.invert() );
12    }
13 }
14
15 }
```

Test-Case 3:

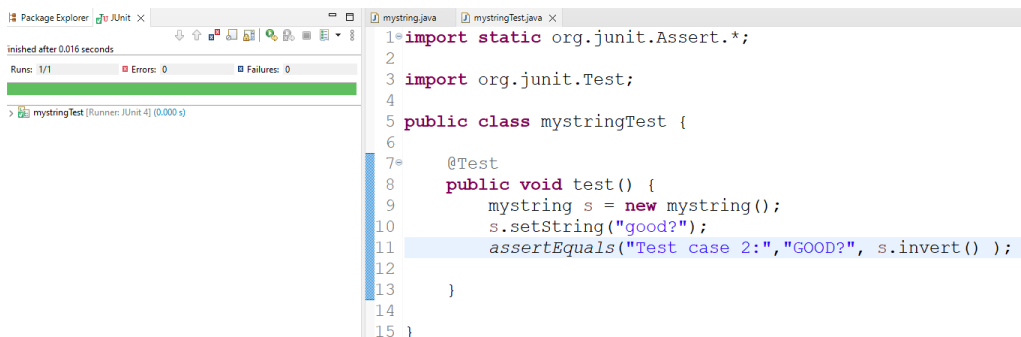

```
1 import static org.junit.Assert.*;
2
3 import org.junit.Test;
4
5 public class mystringTest {
6
7     @Test
8     public void test() {
9         mystring s = new mystring();
10        s.setString("good?");
11        assertEquals("Test case 2:", "GOOD?", s.invert() );
12    }
13 }
14
15 }
```

Test-Case 4:

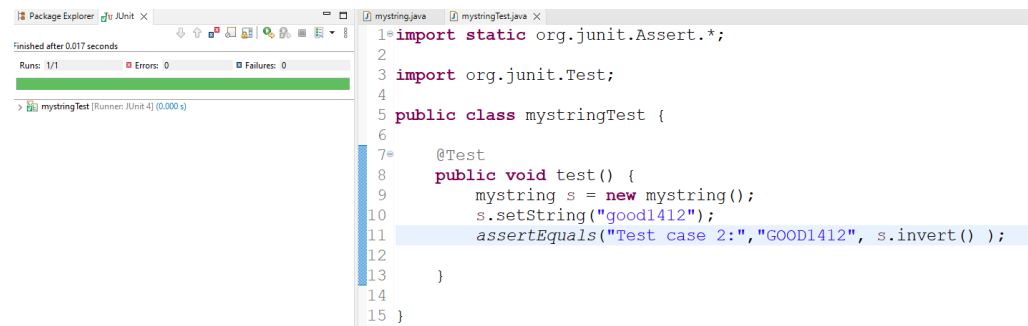

```
1=import static org.junit.Assert.*;
2
3import org.junit.Test;
4
5public class mystringTest {
6
7@    @Test
8    public void test() {
9        mystring s = new mystring();
10       s.setString("good1412");
11       assertEquals("Test case 2:", "GOOD1412", s.invert() );
12
13    }
14
15 }
```