



Document Prepared By **Hamdan Ali**



NAME : HAMDAN ALI

WEEK 3 : Day 12

DAY 12

Prompt the user for age and display whether they are eligible to vote.

Task 12: Screenshots Of Output

WEEK 3 — DAY 12 • CONDITIONALS & COMPARISON OPERATORS

Voting Eligibility Checker

Prompts for age, then checks it against the voting age

Check Your Eligibility


Click the button, enter your age in the popup, and the result appears below.

CHECK MY AGE

What this does

Clicking the button runs `prompt()` to ask for your age, converts the answer to a number, and runs it through a few checks: empty input, invalid numbers, unrealistic values, and finally the real comparison — `age ≥ 18` — using an `if / else` statement.

After clicking in "CHECK MY AGE":

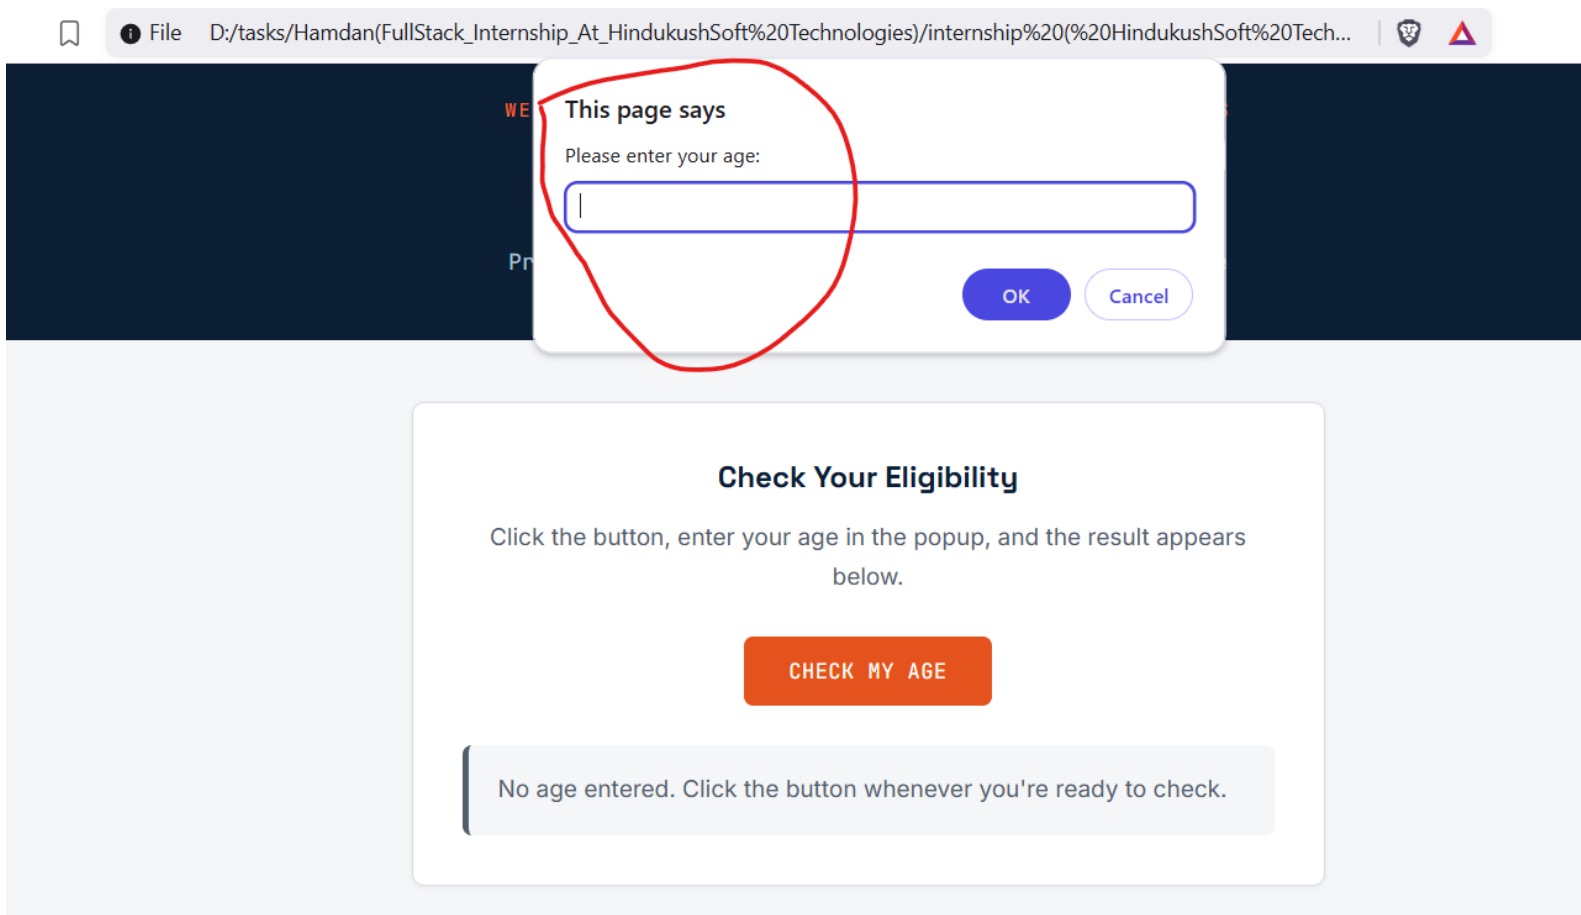

File D:/tasks/Hamdan(FullStack_Internship_At_HindukushSoft%20Technologies)/internship%20(%20HindukushSoft%20Tech...

This page says

Please enter your age:


OK Cancel

Check Your Eligibility

Click the button, enter your age in the popup, and the result appears below.

CHECK MY AGE

No age entered. Click the button whenever you're ready to check.

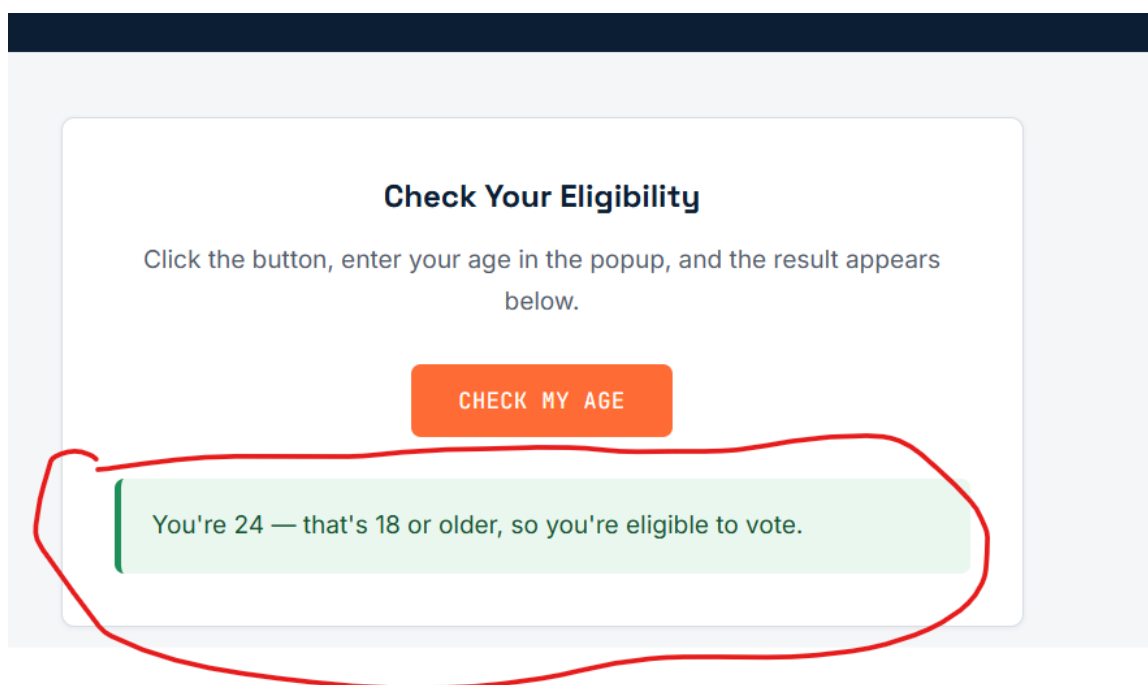

Check Your Eligibility

Click the button, enter your age in the popup, and the result appears below.

CHECK MY AGE

You're 24 — that's 18 or older, so you're eligible to vote.



EXPLANATION

DAY 12 — CONDITIONALS and COMPARISON OPERATORS

Building a Voting Eligibility Checker

Hamdan Ali · Week 3 · Full Stack Web Development Internship

What This Task Was About

The brief for Day 12 was short: ask the user for their age, then tell them whether they can vote. The real point of the day, though, was conditionals and comparison operators, so I didn't want to just slap an if statement on top of a `prompt()` and call it finished. I wanted the logic to actually hold up if someone typed something weird into the box, not just when they typed a normal number like the task probably expects.

I built it as a small interactive page rather than a plain script — there's a button that triggers the prompt, and the result shows up on the page itself instead of just another alert box. It felt closer to how this would actually work in a real product.

Getting the Age From the User

The task calls for a prompt, so that's the starting point:

```
const rawInput = prompt("Please enter your age:");
```

The thing about `prompt()` that's easy to miss at first is that it always hands back a string, even when the user types digits — and if they hit Cancel, it hands back null instead of an empty string. Both of those had to be handled before the age was usable for anything.

Checking the Input Before Trusting It

Before comparing the age to 18, I ran it through a few checks. First, whether the user cancelled the prompt:

```
if (rawInput === null) {  
  showResult("No age entered...", "neutral");  
  return;  
}
```

Then whether what they typed actually converts into a usable number. `Number("")` technically equals 0 in JavaScript, and `Number("abc")` gives NaN — Not a Number — so both an empty field and text input needed catching separately:

```
const age = Number(rawInput.trim());  
  
if (rawInput.trim() === "" || Number.isNaN(age)) {  
  showResult(`${rawInput}` isn't a valid number...', "error");  
  return;  
}
```

And finally, a sanity check on the range — nobody's age is negative, and 250 isn't realistic either, so anything outside 0–120 gets rejected too:

```
if (age < 0 || age > 120) {  
  showResult(`${age} doesn't look like a real age...', "error");  
  return;  
}
```

None of this was explicitly asked for in the task, but conditionals are really about handling more than the one path where everything goes right, and this seemed like the honest way to practice that.

The Actual Eligibility Check

Once the input has passed all of that, the real logic is just one comparison operator doing its job — `>=`, greater than or equal to:

```
if (age >= VOTING_AGE) {  
  showResult(`You're ${age} — that's ${VOTING_AGE} or older, so you're eligible to vote.`,  
    "success");  
} else {  
  const yearsLeft = VOTING_AGE - age;  
  showResult(`You're ${age} — that's under ${VOTING_AGE}, so you're not eligible yet.  
    ${yearsLeft} years to go.`, "warning");  
}
```

I kept the voting age in a constant, `VOTING_AGE`, at the top of the file instead of typing the number 18 directly into the comparison. If the rule ever needs to change, or the same logic gets reused for a different country's voting age, there's exactly one place to update instead of hunting through the file.

The else branch also calculates how many years are left until the person turns 18, which isn't required by the task either, but it turns a flat "no" into something a bit more useful.

Showing the Result

Rather than relying only on `alert()`, I wrote a small helper that updates a result box on the page and logs the same message to the console, so the outcome is visible either way:

```
function showResult(message, status) {  
  console.log(`[Voting Eligibility] ${message}`);  
  resultBox.textContent = message;  
  resultBox.className = `result result--${status}`;  
}
```

The status argument (success, warning, error, or neutral) controls the color of the result box through CSS, so an invalid entry is visually different from an eligible result rather than everything looking the same.

A Few Notes on What I Took From This

- Comparison operators only matter once the value on both sides is trustworthy — most of the actual work here was making sure age was a real number before `>= 18` ever ran.
- `if / else` is really about branches, not just two outcomes — this ended up with five paths (cancelled, empty, not a number, out of range, and the real yes/no check), and each one needed its own message.
- `Number("")` quietly returning 0 instead of NaN is the kind of small JavaScript detail that causes bugs if you don't know to check for it separately.
- Pulling the voting age into a named constant instead of hardcoding 18 inline made the comparison read like a sentence: `age >= VOTING_AGE`.



References Used

I read through the W3Schools pages on conditionals and operators for the exact syntax, and watched both linked videos to see the logic applied in a working example rather than just on the page.

Article — Conditionals: [w3schools.com/js/js_conditionals.asp](https://www.w3schools.com/js/js_conditionals.asp)

Article — Operators: [w3schools.com/js/js_operators.asp](https://www.w3schools.com/js/js_operators.asp)

Video 1: [youtube.com/watch?v=1R4NGtsj7hw](https://www.youtube.com/watch?v=1R4NGtsj7hw)

Video 2: [youtube.com/watch?v=lsV8JQgSW1s](https://www.youtube.com/watch?v=lsV8JQgSW1s)

Files Submitted

- script.js — the JavaScript file with all logic described above.
- index.html — a styled page with a button that triggers the prompt and displays the result inline.

THANK YOU!