


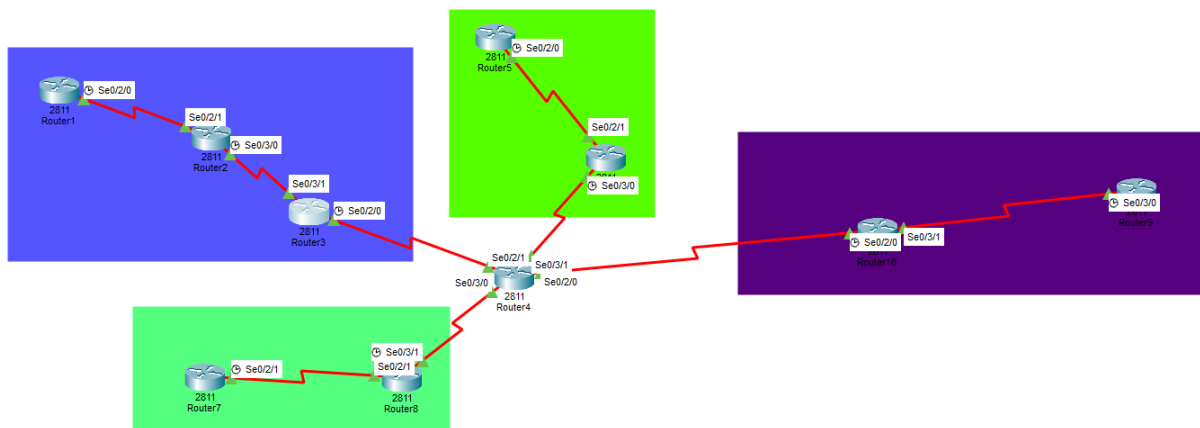

```
Router1

Press RETURN to get started!

Router>en
Router#config t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#ip route 0.0.0.0 0.0.0.0 192.168.1.2
^
% Invalid input detected at '^' marker.

Router(config)#ip route 0.0.0.0 0.0.0.0 192.168.1.2
Router(config)#exit
Router#
%SYS-5-CONFIG_I: Configured from console by console
Router#
```

Copy Paste

☐ Top


```
Router2

Press RETURN to get started!

Router>en
Router#config t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#ip route 0.0.0.0 0.0.0.0 192.168.2.2
Router(config)#exit
Router#
%SYS-5-CONFIG_I: Configured from console by console
```

Copy Paste

☐ Top

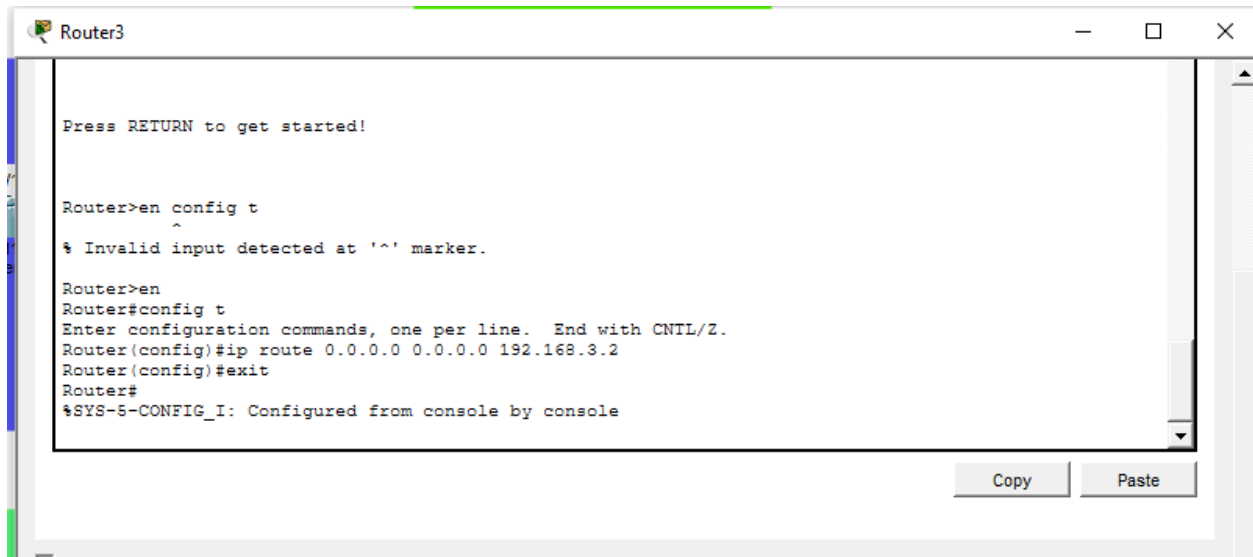


Router3

```
Press RETURN to get started!

Router>en config t
^
% Invalid input detected at '^' marker.

Router>en
Router#config t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#ip route 0.0.0.0 0.0.0.0 192.168.3.2
Router(config)#exit
Router#
%SYS-5-CONFIG_I: Configured from console by console
```

Copy Paste

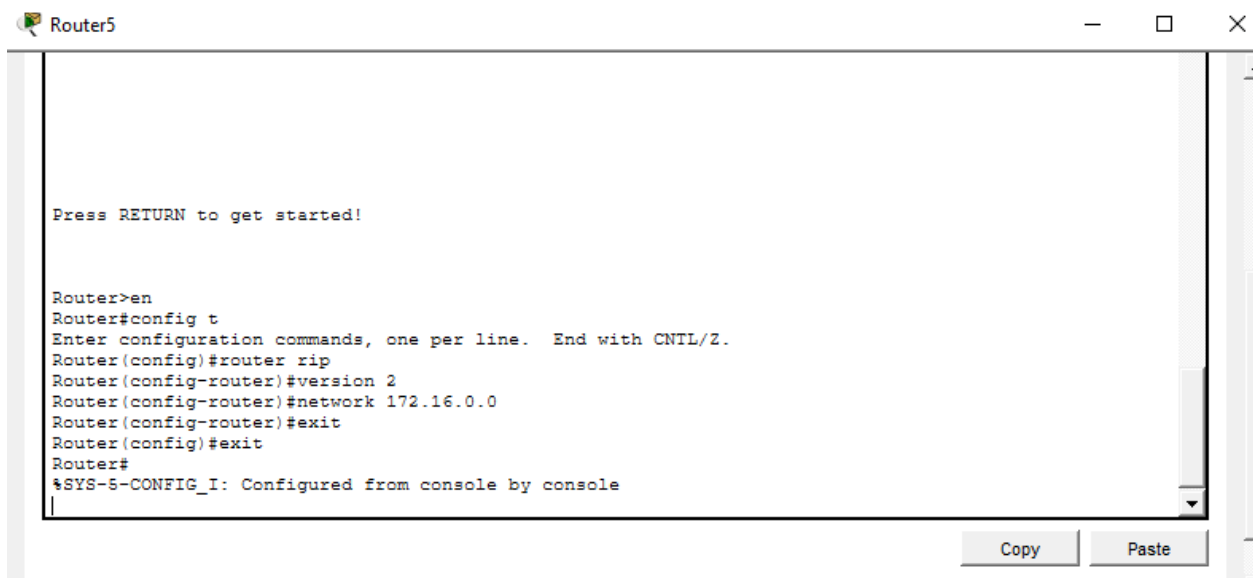


Router5

```
Press RETURN to get started!

Router>en
Router#config t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#router rip
Router(config-router)#version 2
Router(config-router)#network 172.16.0.0
Router(config-router)#exit
Router(config)#exit
Router#
%SYS-5-CONFIG_I: Configured from console by console
```

Copy Paste

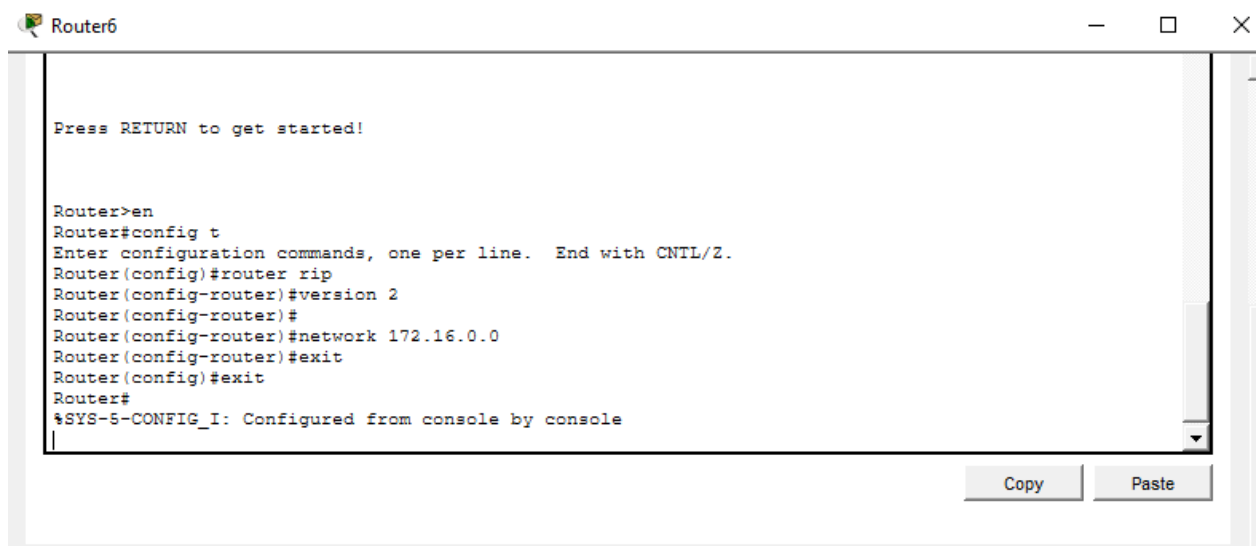

Router6

```
Press RETURN to get started!

Router>en
Router#config t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#router rip
Router(config-router)#version 2
Router(config-router)#
Router(config-router)#network 172.16.0.0
Router(config-router)#exit
Router(config)#exit
Router#
%SYS-5-CONFIG_I: Configured from console by console
```

Copy Paste

Router7

```
Press RETURN to get started!

Router>en
Router#config t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#router eigrp 15398
Router(config-router)#network 10.0.0.0
Router(config-router)#no auto-summary
Router(config-router)#exit
Router(config)#exit
Router#
%SYS-5-CONFIG_I: Configured from console by console

%DUAL-5-NBRCHANGE: IP-EIGRP 15398: Neighbor 10.1.1.2 (Serial0/2/1) is up: new adjacency
```

Copy

Router8

```
Press RETURN to get started!

Router>en
Router#config t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#router eigrp 15398
Router(config-router)#network 10.0.0.0
Router(config-router)#
%DUAL-5-NBRCHANGE: IP-EIGRP 15398: Neighbor 10.1.1.1 (Serial0/2/1) is up: new adjacency

Router(config-router)#no auto-summary
Router(config-router)#exit
Router(config)#exit
Router#
%SYS-5-CONFIG_I: Configured from console by console
```


Copy Paste

Router9

```
Press RETURN to get started!

Router>en
Router#config t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#router ospf 15398
Router(config-router)#network 11.1.1.0 0.0.0.3 area 0
Router(config-router)#exit
Router(config)#exit
Router#
%SYS-5-CONFIG_I: Configured from console by console

00:33:26: %OSPF-5-ADJCHG: Process 15398, Nbr 11.1.2.1 on Serial0/3/0 from LOADING to FULL, Loading Done
```

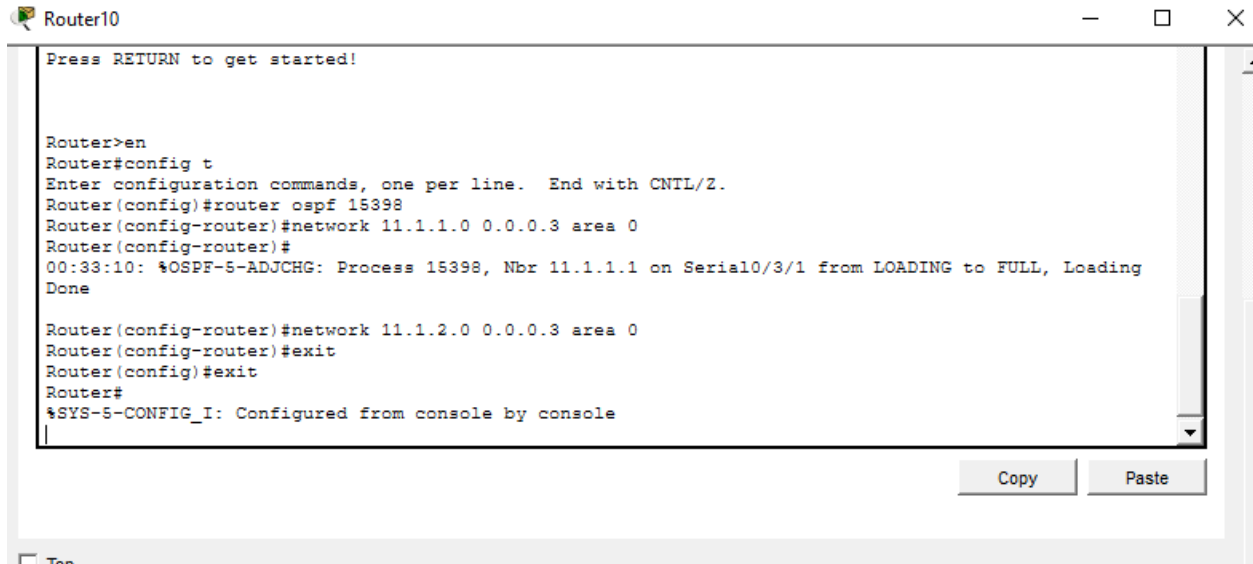


Router10

```
Press RETURN to get started!

Router>en
Router#config t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#router ospf 15398
Router(config-router)#network 11.1.1.0 0.0.0.3 area 0
Router(config-router)#
00:33:10: %OSPF-5-ADJCHG: Process 15398, Nbr 11.1.1.1 on Serial0/3/1 from LOADING to FULL, Loading Done

Router(config-router)#network 11.1.2.0 0.0.0.3 area 0
Router(config-router)#exit
Router(config)#exit
Router#
%SYS-5-CONFIG_I: Configured from console by console
```

Copy Paste

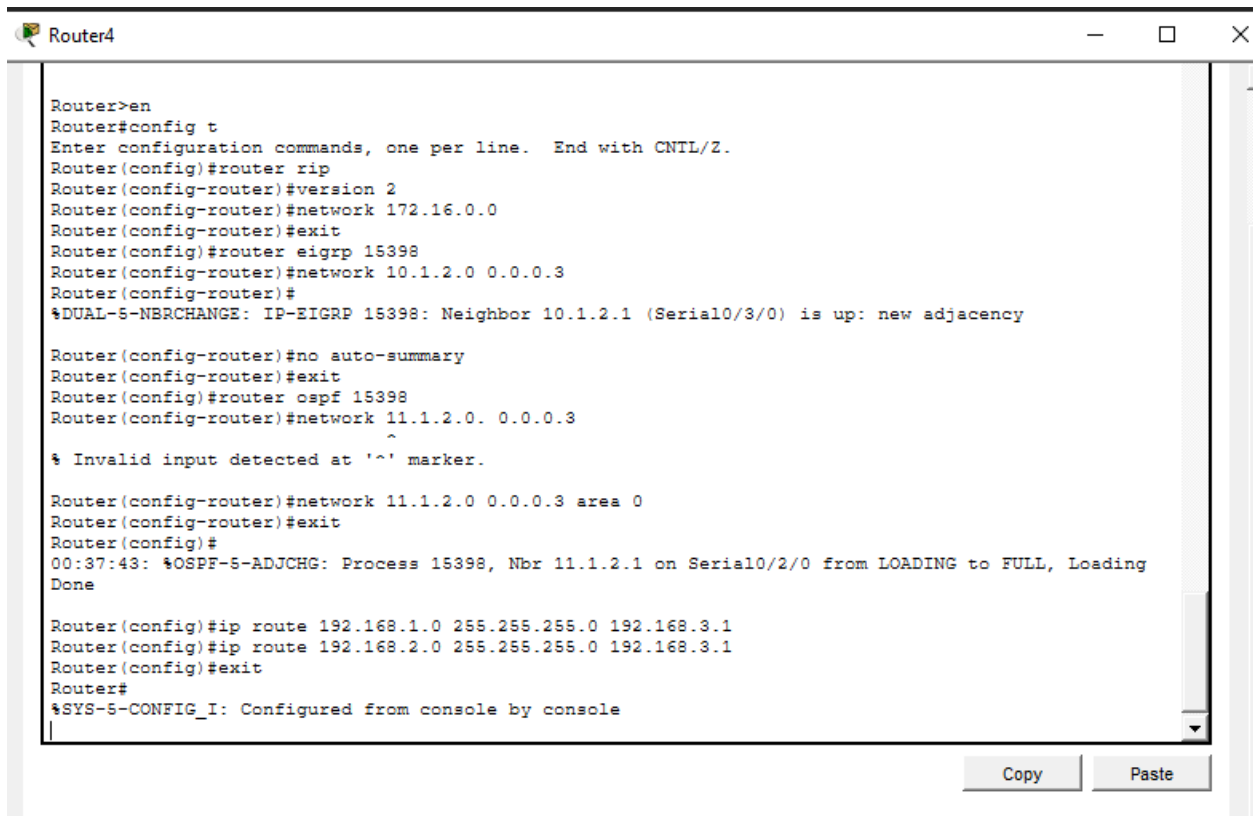

Router4

```
Router>en
Router#config t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#router rip
Router(config-router)#version 2
Router(config-router)#network 172.16.0.0
Router(config-router)#exit
Router(config)#router eigrp 15398
Router(config-router)#network 10.1.2.0 0.0.0.3
Router(config-router)#
%DUAL-5-NBRCHANGE: IP-EIGRP 15398: Neighbor 10.1.2.1 (Serial0/3/0) is up: new adjacency

Router(config-router)#no auto-summary
Router(config-router)#exit
Router(config)#router ospf 15398
Router(config-router)#network 11.1.2.0 0.0.0.3
^
% Invalid input detected at '^' marker.

Router(config-router)#network 11.1.2.0 0.0.0.3 area 0
Router(config-router)#exit
Router(config)#
00:37:43: %OSPF-5-ADJCHG: Process 15398, Nbr 11.1.2.1 on Serial0/2/0 from LOADING to FULL, Loading Done

Router(config)#ip route 192.168.1.0 255.255.255.0 192.168.3.1
Router(config)#ip route 192.168.2.0 255.255.255.0 192.168.3.1
Router(config)#exit
Router#
%SYS-5-CONFIG_I: Configured from console by console
```

Copy Paste

Router4

```

Router(config)#ip route 192.168.1.0 255.255.255.0 192.168.3.1
Router(config)#ip route 192.168.2.0 255.255.255.0 192.168.3.1
Router(config)#exit
Router#
%SYS-5-CONFIG_I: Configured from console by console

Router#config t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#router ospf 15398
Router(config-router)#redistribute rip metric 250 subnets
Router(config-router)#redistribute eigrp 15398 metric 250 subnets
Router(config-router)#redistribute static metric 250 subnets
Router(config-router)#exit
Router(config)#router eigrp 15398
Router(config-router)#redistribute ospf 15398 metric 100 1 255 10 5
Router(config-router)#redistribute rip metric 100 1 255 10 5
Router(config-router)#redistribute static metric 100 1 255 10 5
Router(config-router)#exit
Router(config)#router rip
Router(config-router)#version 2
Router(config-router)#redistribute ospf 15398 metric 2
Router(config-router)#redistribute ospf 15398 metric 2
Router(config-router)#redistribute static metric 2
Router(config-router)#exit
Router(config)#
    
```

Copy Paste

Fire	Last Status	Source	Destination	Type	Color	Time(sec)	Periodic	Num	Edit	Delete
	Successful	Router1	Router10	ICMP		0.000	N	0	(e...	(delete)
	Successful	Router7	Router	ICMP		0.000	N	1	(e...	(delete)
	Successful	Router1	Router10	ICMP		0.000	N	2	(e...	(delete)