

Pointer 2

Computer Science Department
Eastern Washington University
Yun Tian (Tony) Ph.D.

Recall

- Concept of address
- Concept of pointers
- How to define/declare pointers
- How to use pointers?

Today

- Pointer Arithmetic

NULL

- It is always a good practice to assign a NULL value to a pointer variable in case you do not have exact address to be assigned.
 - This is done at the time of variable declaration.
- A pointer that is assigned NULL is called a null pointer.
 - NULL is predefined Constant in C standard library. The value of NULL is 0.

NULL

```
#include <stdio.h>

int main ()
{
    int *ptr = NULL; // or do this in two statements

    printf("The value of ptr is : %p\n", ptr );

    return 0;
}

//output The value of ptr is 0
```

Intro to pointer Arithmetic

- C pointer variable holds an address of another regular variable.
 - The address is a numeric value.
- You can perform
 - increase the pointer,
 - decrease the pointer,
 - or compare the value in a pointer variable with another address.

Intro

- These operations are called pointer arithmetic.
- Pointer arithmetic changes the value in the pointer variable,
 - In turn, these pointer arithmetic make the pointer point to **different** memory locations.

Example

- `int a[4] = { 8, 9, 5, 6};`
- `int *ptr = a;`
- In this example, we assume `&a[0]` is `0x1000`, the base address of the array `a`.
- We assume each integer take 4 bytes on this machine.
- if we do `ptr ++;`
- what is the value of `ptr` now? 0x1004

Example

- `int a[4] = { 8, 9, 5, 6};`
- `int *ptr = a;`
- `ptr ++`
- `ptr` get `0x1004`, **not `0x1001`**.
- Because each time `ptr` is incremented, it will point to the next **integer** location which is 4 bytes next to the current location.
 - Because type of **`ptr`** is a **integer pointer**, (`int *ptr`).
 - Supposed to point to an integer.

Example

- `int a[4] = { 8, 9, 5, 6};`
- `int *ptr = a;`
- `ptr ++`
- `ptr` gets `0x1004`, **not `0x1001`**.
- In this example, `0x1004` is the address of `a[1]`.
- You can understand this way:
 - initially `ptr` points `a[0]`, because `ptr = a`,
 - after `ptr ++`, `ptr` points to the next integer memory location in `a`. that means it points to `a[1]`.

0x1000	0x1004	0x1008	0x100c
a[0]	a[1]	a[2]	a[3]

Example


- This operation will move the pointer to next memory location of the data **item** without impacting actual value at the memory location.
- If **ptr** points to a **character** array whose address is 1000, then above operation will point to the location 1001
 - because next character will be available at 1001.
 - each character take one bytes in memory.

Demo of Pointe Arithmetic

- Summary
- `ptr ++`
- `ptr = ptr + 1`
- `++ ptr`
 - `ptr` is increased by the size of data type it points to.
 - move the pointer to the next Mem location of the data type it points to.

Access Array Element

- `int arr[] = { 10, 20, 30, 40};`
- `int *ptr = arr;`

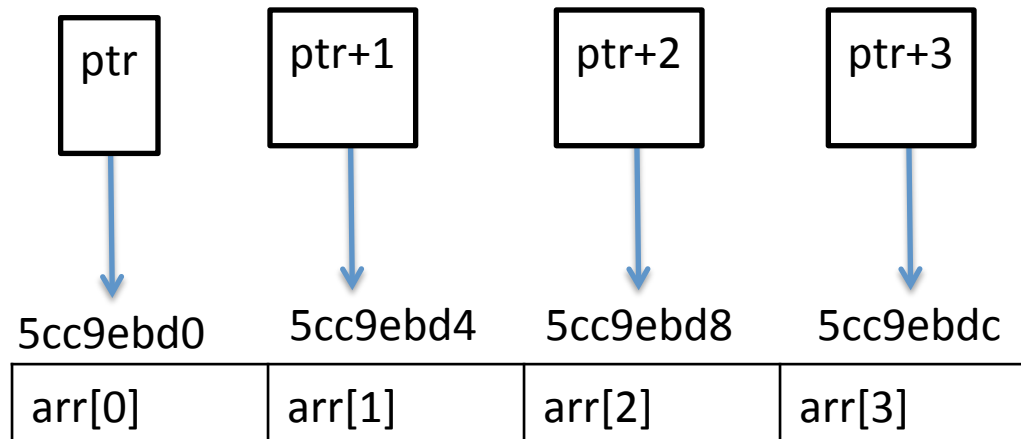

Then we could access each array element by use `*(ptr++)` or `*(ptr + i)` in a loop,

Access of Array Element 1

```
int i;  
int arr[MAX];  
int *ptr = NULL;  
ptr = arr;  
//...other code!!!  
  
for ( i = 0; i < MAX; i++)  
{  
    //Assume ptr has been initialized to the base address of an array  
    printf("Address of arr[%d] = %x\n", i, ptr + i );  
    printf("Value of arr[%d] = %d\n", i, *(ptr + i) );  
}
```

Access of Array Element 2

```
int i;  
int arr[MAX];  
int *ptr = NULL;  
ptr = arr;  
  
//...other code !!!  
  
for ( i = 0; i < MAX; i++)  
{  
    //Assume ptr has been initialized to the base address of an array  
    printf("Address of arr[%d] = %x\n", i, ptr );  
    printf("Value of arr[%d] = %d\n", i, *(ptr++) );  
}
```

Type of variables and pointers

- `int *iptr = NULL;`
- `int a = 60;`
- `iptr = &a;`
- We say `iptr` is of type `(int *)` or integer pointer.
- Note that address is NOT a type.
 - We consider `&a` is in type of integer pointer also.
- The type of expression `(*iptr)` is ??? Integer

Type of variables and pointers

```
double *dptr = NULL;
```

```
double b = 60.0;
```

```
dptr = &b;
```

- We say **dptr is of type (double *) or double pointer.**
- Note that address is NOT a type.
 - We consider &b is in type of double pointer also.
- The type of expression (*dptr) is ??? **double**

Demo of Pointer Decreasing and Comparison

- `pointerArith2.c`
- `pointerArith3.c`

Summary

- Pointer Arithmetic
 - Increasing
 - Decreasing
 - Compare
 - Demo

Next Class

- Call function by value and call by reference