

Lab 4 — Submission Setup, and Object Oriented Programming

Forking, cloning, and your first push — then the OOP exercises

Amir Farbin

Today

Two halves

- ▶ **Part 1 — Submission setup.** Fork, clone, wire the remotes, push. We do this together, from scratch, right now. **Lab 2 is due tonight, and you submit it here.**
- ▶ **Part 2 — Object Oriented Programming.** The lab itself: 12 exercises, using the Lectures 8–9 material.

Two halves

- ▶ **Part 1 — Submission setup.** Fork, clone, wire the remotes, push. We do this together, from scratch, right now. **Lab 2 is due tonight, and you submit it here.**
- ▶ **Part 2 — Object Oriented Programming.** The lab itself: 12 exercises, using the Lectures 8–9 material.
- ▶ Labs/GitHub-Setup.pdf — the same steps as Part 1, written out line by line, with a table of what to do when git complains
- ▶ Labs/Lab.4/Lab.4.ipynb — everything below, plus the exercises, in one notebook

Part 1 — Submission Setup


Why a fork

- ▶ The course repository is **public** — UTA-DataScience/DATA3402.Fall.2026
- ▶ You don't have write access to it, so you need your own copy to push to
- ▶ **Fork** (*a GitHub feature, not a git command*) — your own copy of the repo, on your own account, that can now go its own way

Why a fork

- ▶ The course repository is **public** — UTA-DataScience/DATA3402.Fall.2026
- ▶ You don't have write access to it, so you need your own copy to push to
- ▶ **Fork** (*a GitHub feature, not a git command*) — your own copy of the repo, on your own account, that can now go its own way
- ▶ Because the class repo is public, **your fork will be public too**. That's expected.

How this course is wired

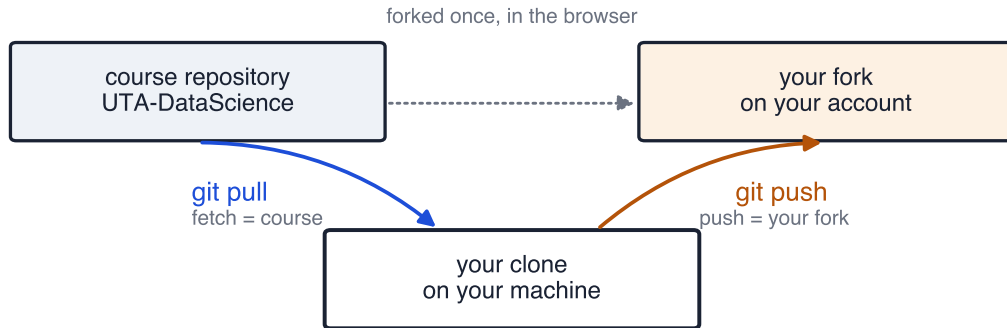

one remote, named `origin` — it fetches from one place and pushes to another

Pull from class. Push to my fork. Never force push.

Setup — once per semester

1. Fork the class repo, in your browser
2. `git clone` your fork onto your machine
3. `cd` into the clone
4. `git remote remove origin`
5. `git remote add origin <class repo URL>`
6. `git remote set-url --push origin <your fork's URL>`

Setup — once per semester

1. Fork the class repo, in your browser
2. `git clone` your fork onto your machine
3. `cd` into the clone
4. `git remote remove origin`
5. `git remote add origin <class repo URL>`
6. `git remote set-url --push origin <your fork's URL>`

Check it: `git remote -v` should show the **class repo for fetch**, and **your fork for push**. If both lines show the same URL, step 6 didn't take — run it again.

Every week

every lab, the same five steps



Submitting

1. `git pull` — get this week's material
2. Rename your solution: `Lab.2.ipynb` → `Lab.2.solution.ipynb`
 - ▶ Never submit under the original filename — the next `git pull` would try to merge our changes into yours
3. `git add Labs/Lab.2/Lab.2.solution.ipynb`
4. `git commit -a -m "Lab 2 submission"`
5. `git push`
6. Check GitHub — your fork should show the new commit

If it goes wrong

- ▶ **rejected (non-fast-forward)** on your very first push — expected. Your fork and the class repo have separate histories: `git config pull.rebase false`, pull, then push again
- ▶ **Merge conflict** — you and the class both changed the same file, and git can't decide which version wins. [Labs/DATA3402_Lab3_Merge_Conflict_Guide.pdf](#) walks through resolving one, including inside a notebook's JSON
- ▶ Full error table, line by line: [Labs/GitHub-Setup.pdf](#)

Before you leave today

- ▶ Confirm your fork shows the pushed commit on GitHub
- ▶ Need to keep working later? Edit the same clone, then repeat add/commit/push

Part 2 — Object Oriented Programming

- ▶ **Encapsulate** — bundle data and the operations on it into one object
- ▶ **Public / private** — by convention, a leading `__` means “internal to the class”; everything else goes through accessor functions you write
- ▶ **Inheritance** — a base class states the common interface; subclasses fill it in
- ▶ **Canvas, Shape, RasterDrawing** — the drawing classes from Lecture 9 are exactly what exercises 10–12 build on

The arc of the 12 exercises

- ▶ **1–2** — a counter class, then the same thing with private data
- ▶ **3–6** — rectangle, circle, a shared base class, triangle
- ▶ **7–9** — perimeter points, point-containment, overlap
- ▶ **10–12** — paint it: a Canvas/paint module, RasterDrawing, save/load

The arc of the 12 exercises

- ▶ **1–2** — a counter class, then the same thing with private data
- ▶ **3–6** — rectangle, circle, a shared base class, triangle
- ▶ **7–9** — perimeter points, point-containment, overlap
- ▶ **10–12** — paint it: a Canvas/paint module, RasterDrawing, save/load

Each exercise builds on the last. A shaky base class in 5 doesn't just break 5 — it makes 6 through 9 harder too. Get help early rather than push on with it.

Save and load, the trick

- ▶ Overload `__repr__` to return the **Python code that would reconstruct the object**
- ▶ Saving is writing that string to a file
- ▶ Loading is reading the string back and eval-ing it

Save and load, the trick

- ▶ Overload `__repr__` to return the **Python code that would reconstruct the object**
- ▶ Saving is writing that string to a file
- ▶ Loading is reading the string back and eval-ing it

Labs/Lab.4/Lab.4.ipynb has a worked `foo / foo_loader` example at the very end — read it before you start exercise 12, not after.