
How the Mac health monitor works

A menu-bar app on your Mac measures the machine. A Jakarta EE server decides when something looks unusual, and an agent asks a local language model what it means. The result appears on a live web page.

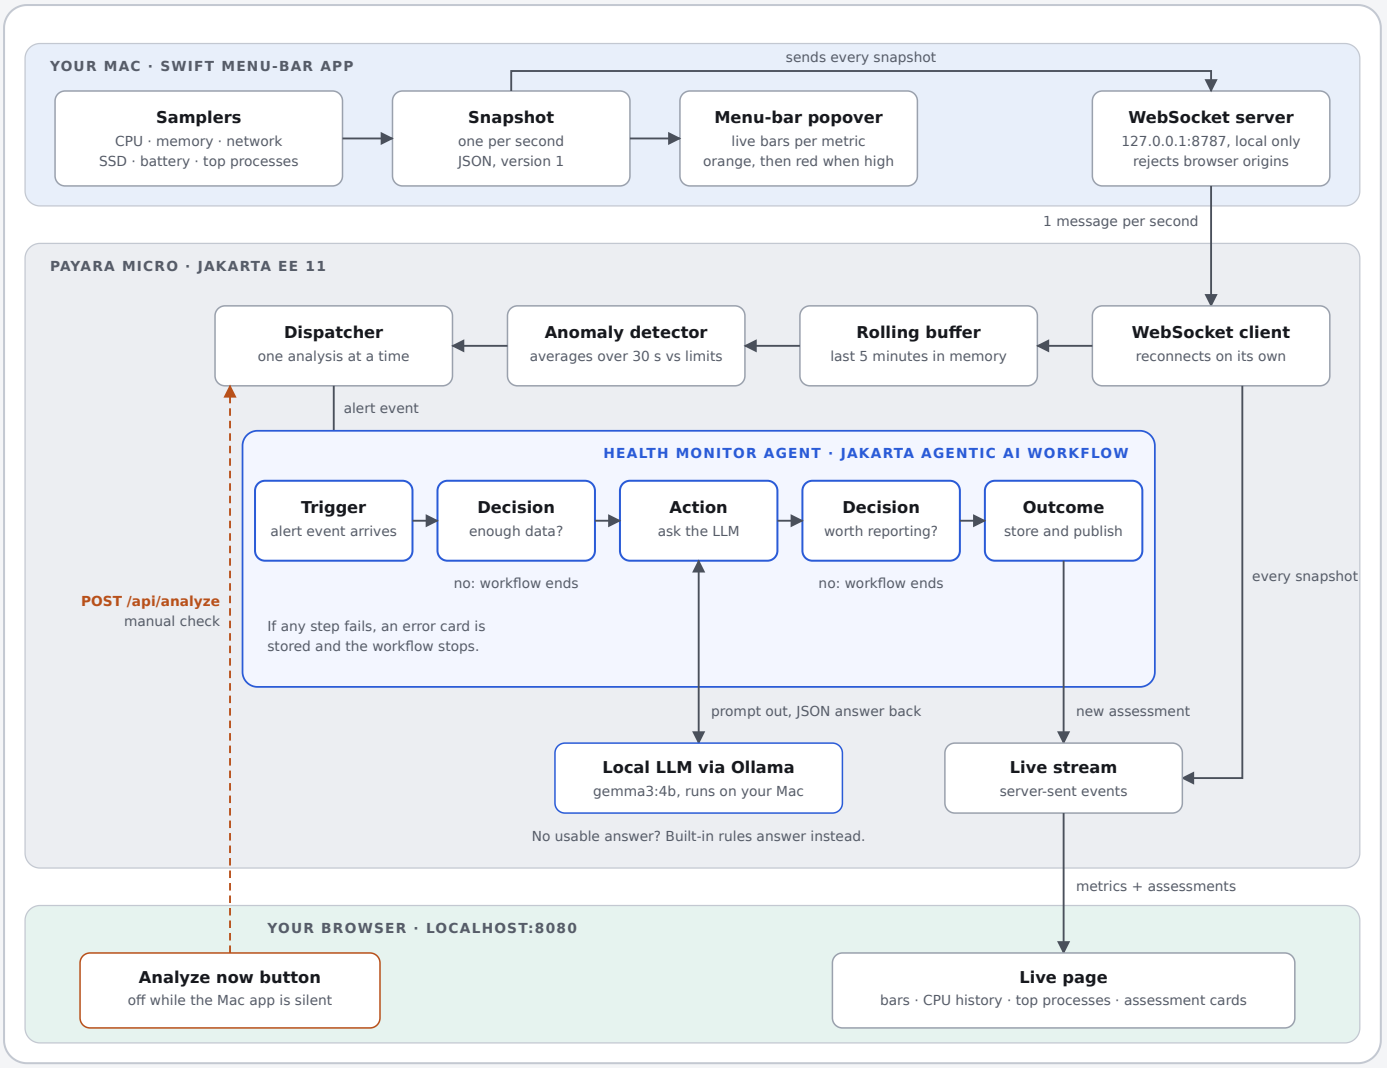

data flows automatically you click steps of the agent workflow

1. The Mac measures

Samplers read CPU, memory, network, SSD activity, battery and the busiest processes once a second. The same snapshot feeds the menu-bar popover and a local WebSocket.

2. The server decides when to look

Payara keeps the last five minutes. Simple threshold rules watch the averages. Only when a limit is crossed, or you press Analyze now, does the agent start, and only one analysis runs at a time.

3. The agent explains

The agent checks it has enough data, asks the local model to judge the situation, and keeps the result only if it matters. The page receives it immediately.

> The model never sees the one-per-second stream. It gets one short summary per alert: a 30 second window and the top processes. That keeps a small local model fast enough to be useful.