

Cucumber Report

Feb 12, 2025, 10:08:55 AM

Start : Feb 12, 10:08:53.994 AM

End : Feb 12, 10:08:54.079 AM

Duration : 0.085 s

Features

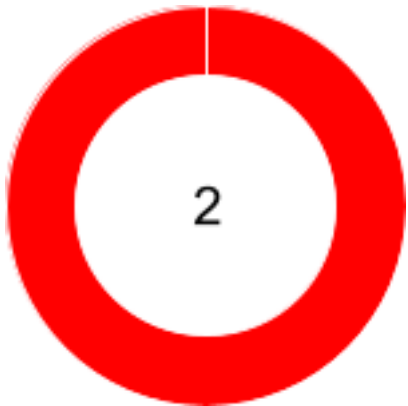
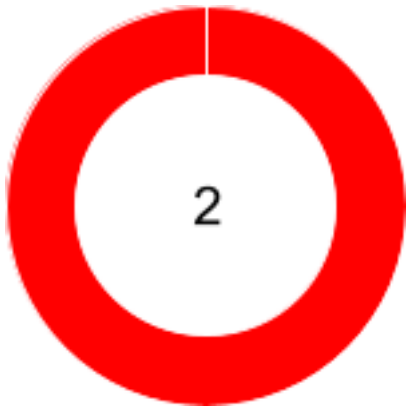
Scenarios

Steps

PASSED - 0
FAILED - 2
SKIPPED - 0

PASSED - 0
FAILED - 2
SKIPPED - 0

PASSED - 1
FAILED - 2
SKIPPED - 3



Feature		Scenario				Step			
Name	Duration	T	P	F	S	T	P	F	S
<u>Login to POS Functionality</u>	0.046 s	1	0	1	0	3	1	1	1
<u>Validate Hana Viewer Login functionality</u>	0.017 s	1	0	1	0	3	0	1	2

#	Feature Name	Scenario Name
1	<u>Login to POS Functionality</u>	<u>Web Login Page Functionality</u>
2	<u>Validate Hana Viewer Login functionality</u>	<u>Login Hana Viewer App</u>



#	Feature Name	T	P	F	S	Duration
1	Login to POS Functionality	1	0	1	0	0.046 s
2	Validate Hana Viewer Login functionality	1	0	1	0	0.017 s

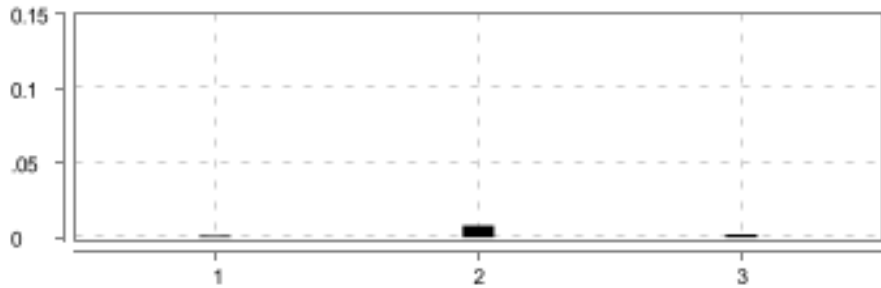



#	Feature Name	Scenario Name	T	P	F	S	Duration
1	<u>Login to POS Functionality</u>	<u>Web Login Page Functionality</u>	3	1	1	1	0.038 s
2	<u>Validate Hana Viewer Login functionality</u>	<u>Login Hana Viewer App</u>	3	0	1	2	0.016 s

Login to POS Functionality

FAILED	DURATION - 0.046 s	Scenarios		Steps	
/ 10:08:53.994 AM // 10:08:54.040 AM /		Total - 1		Total - 3	
		Pass - 0		Pass - 1	
		Fail - 1		Fail - 1	
		Skip - 0		Skip - 1	

Web Login Page Functionality

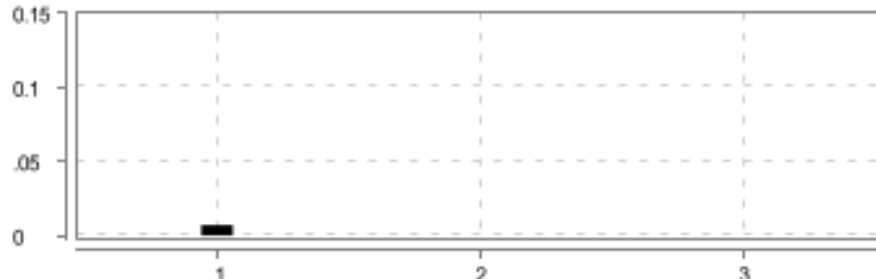
FAILED	DURATION - 0.038 s		Steps	
/ 10:08:54.002 AM // 10:08:54.040 AM /			Total - 3	
Login to POS Functionality			Pass - 1	
			Fail - 1	
			Skip - 1	

#	Step / Hook Details	Status	Duration
1	Given Login to Hana POS Web App	PASSED	0.001 s
2	When User Enters the "hanauser_2" and "123" and click login java.lang.IllegalStateException: WebDriver is not initialized. Make sure to start WebDriver before creating Page Objects. at WebPageObjects.LoginPageObjects.<init>(LoginPageObjects.java:18) at StepDefinition.WebApp_Login_Functionality.user_enters_and_and_click_login(WebApp_Login_Functionality.java:19) at ?.User Enters the "hanauser_2" and "123" and click login(file:///C:/Users/sakrateesh/Desktop/Hana_Viewer_Mobile_Automation/src/test/resources/Features/HanaPOSWebLogin.feature:5) * Not displayable characters are replaced by '?'.	FAILED	0.008 s
	AFTER_STEP - StepDefinition.Hooks.addScreenshot(io.cucumber.java.Scenario) java.lang.IllegalStateException: Driver has not been initialized. Call setDriver() first. at ProjectBase.TestBaseClass.getDriver(TestBaseClass.java:583) at StepDefinition.Hooks.addScreenshot(Hooks.java:46)	FAILED	0.001 s
3	Then User Should logged into Hana POS App	SKIPPED	0.002 s

Validate Hana Viewer Login functionality

FAILED DURATION - 0.017 s		Scenarios Total - 1 Pass - 0 Fail - 1 Skip - 0				Steps Total - 3 Pass - 0 Fail - 1 Skip - 2			
/ 10:08:54.062 AM // 10:08:54.079 AM /									

Login Hana Viewer App

FAILED DURATION - 0.016 s			Steps Total - 3 Pass - 0 Fail - 1 Skip - 2	
/ 10:08:54.063 AM // 10:08:54.079 AM /				
Validate Hana Viewer Login functionality				

#	Step / Hook Details	Status	Duration
1	Given Login to Hana Viewer Mobile App <pre> java.lang.ExceptionInInitializerError at java.base/jdk.internal.misc.Unsafe.ensureClassInitialized0(Native Method) at java.base/jdk.internal.misc.Unsafe.ensureClassInitialized(Unsafe.java:1160) at java.base/jdk.internal.reflect.MethodHandleAccessorFactory.ensureClassInitialized(MethodHandleAccessorFactory.java:300) at java.base/jdk.internal.reflect.MethodHandleAccessorFactory.newConstructorAccessor(MethodHandleAccessorFactory.java:103) at java.base/jdk.internal.reflect.ReflectionFactory.newConstructorAccessor(ReflectionFactory.java:200) at java.base/java.lang.reflect.Constructor.acquireConstructorAccessor(Constructor.java:549) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:486) at org.picocontainer.injectors.AbstractInjector.newInstance(AbstractInjector.java:145) at org.picocontainer.injectors.ConstructorInjector\$1.run(ConstructorInjector.java:342) at org.picocontainer.injectors.AbstractInjector\$ThreadLocalCyclicDependencyGuard.observe(AbstractInjector.java:270) at org.picocontainer.injectors.ConstructorInjector.getComponentInstance(ConstructorInjector.java:364) at org.picocontainer.injectors.AbstractInjectionFactory\$LifecycleAdapter.getComponentInstance(AbstractInjectionFactory.java:56) at org.picocontainer.behaviors.AbstractBehavior.getComponentInstance(AbstractBehavior.java:64) at org.picocontainer.behaviors.Stored.getComponentInstance(Stored.java:91) at org.picocontainer.DefaultPicoContainer.getInstance(DefaultPicoContainer.java:699) at org.picocontainer.DefaultPicoContainer.getComponent(DefaultPicoContainer.java:647) at org.picocontainer.DefaultPicoContainer.getComponent(DefaultPicoContainer.java:678) </pre>	FAILED	0.007 s

#	Step / Hook Details	Status	Duration
	at io.cucumber.picocontainer.PicoFactory.getInstance(PicoFactory.java:64) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:62) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:81) at io.cucumber.core.runner.TestStep.run(TestStep.java:53) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:136) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:136) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:199) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:147) at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:162) at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:145) at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:229) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.junit.runner.JUnitCore.run(JUnitCore.java:137) at com.intellij.junit4.JUnit4IdeaTestRunner.startRunnerWithArgs(JUnit4IdeaTestRunner.java:69)		

#	Step / Hook Details	Status	Duration
	at com.intellij.rt.junit.IdeaTestRunner\$Repeater\$1.execute(IdeaTestRunner.java:38) at com.intellij.rt.execution.junit.TestsRepeater.repeat(TestsRepeater.java:11) at com.intellij.rt.junit.IdeaTestRunner\$Repeater.startRunnerWithArgs(IdeaTestRunner.java:35) at com.intellij.rt.junit.JUnitStarter.prepareStreamsAndStart(JUnitStarter.java:232) at com.intellij.rt.junit.JUnitStarter.main(JUnitStarter.java:55) Caused by: java.lang.IllegalStateException: Driver has not been initialized. Call setDriver() first. at ProjectBase.TestBaseClass.getDriver(TestBaseClass.java:583) at PageObjects.LoginPageObjects.<init>(LoginPageObjects.java:13) at StepDefinition.Login.<clinit>(Login.java:10)		
	AFTER_STEP - StepDefinition.Hooks.addScreenshot(io.cucumber.java.Scenario) java.lang.IllegalStateException: Driver has not been initialized. Call setDriver() first. at ProjectBase.TestBaseClass.getDriver(TestBaseClass.java:583) at StepDefinition.Hooks.addScreenshot(Hooks.java:46)	FAILED	0.002 s
2	When User Enters "Liambj" and "Test@123" and click login	SKIPPED	0.000 s
3	Then User Should logged into Hana Driver Login	SKIPPED	0.000 s