


ResGCNNet: region posteriors from an attributed graph

hidden width D , depth n ; the nine-node graph on the right is the same example at every stage

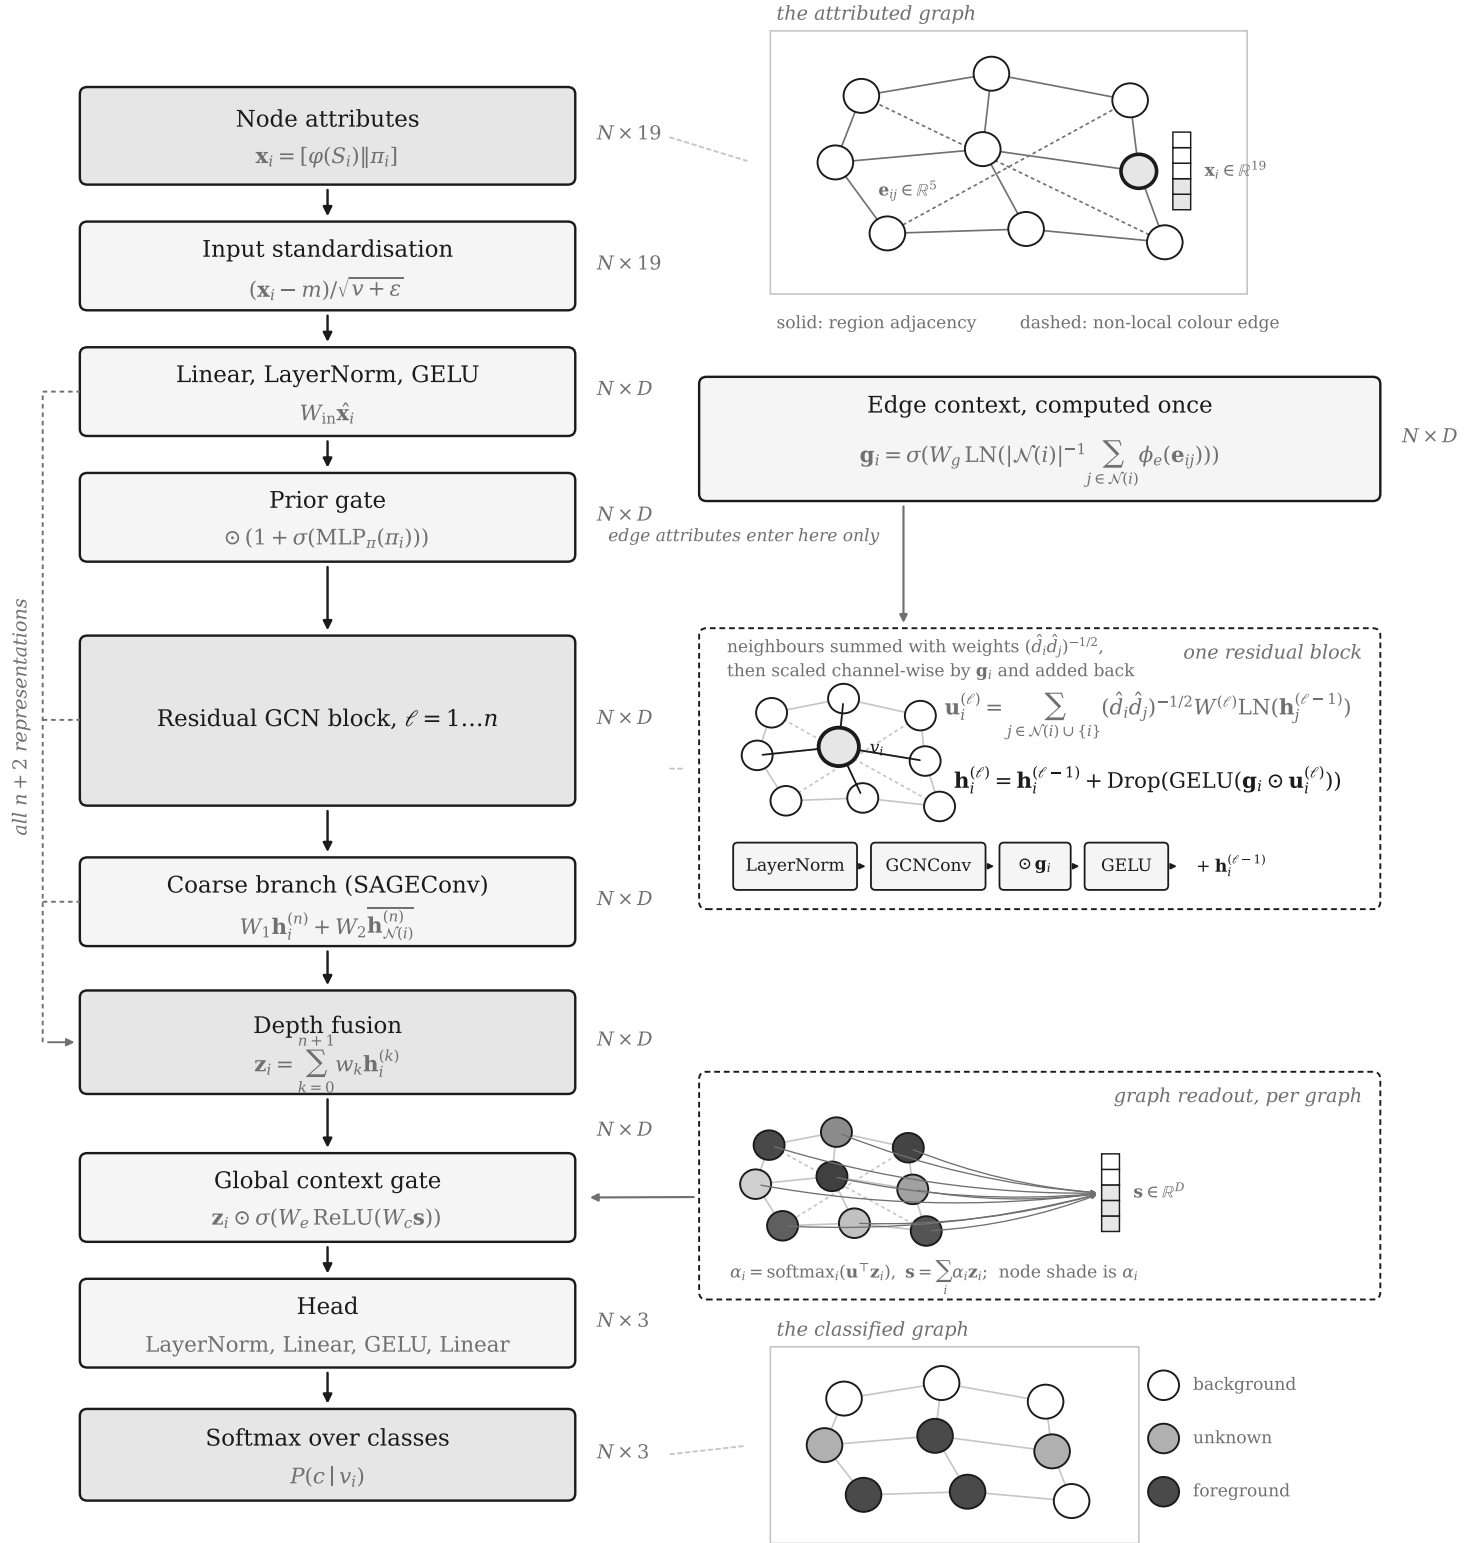

Solid arrows carry node representations; dashed arrows carry a quantity read by more than one stage.

Every graph-level reduction is taken per graph, so several graphs occupy one batch without interacting, and the per-node output is the same whether a graph is evaluated alone or in company.