


```
terminal powershell
(.env) PS C:\Users\bharg\Downloads\TriSem\SEM 4\DBMS\FastAPI_University> python -m pip install asyncmy "python-jose[cryptography]" "passlib[bcrypt]"
python-multipart
Downloading ecdsa-0.19.2-py2.py3-none-any.whl (150 kB)
Downloading pyasn1-0.6.4-py3-none-any.whl (84 kB)
Using cached six-1.17.0-py2.py3-none-any.whl (11 kB)
Downloading pycparser-3.0-py3-none-any.whl (48 kB)
Installing collected packages: passlib, six, python-multipart, pycparser, pyasn1, bcrypt, asyncmy, rsa, ecdsa, cffi, python-jose, cryptography
Successfully installed asyncmy-0.2.14 bcrypt-5.0.0 cffi-2.1.1 cryptography-50.0.1 ecdsa-0.19.2 passlib-1.7.4 pyasn1-0.6.4 pycparser-3.0 python-jose-3
.5.0 python-multipart-0.0.32 rsa-4.9.1 six-1.17.0
(.env) PS C:\Users\bharg\Downloads\TriSem\SEM 4\DBMS\FastAPI_University> python -c "import asyncmy, jose, passlib, multipart; print('All P5 packages
installed successfully')"
All P5 packages installed successfully
(.env) PS C:\Users\bharg\Downloads\TriSem\SEM 4\DBMS\FastAPI_University>
```

```
New_Query_1789455890746.sql X
C: > Users > bharg > .dbclient > query > 1789455881007@@127.0.0.1@3306@mysql > New_Query_1789455890746.sql > ...
D>Run
✓ 1 CREATE DATABASE IF NOT EXISTS library_db; 42ms AffectedRows: 1
```

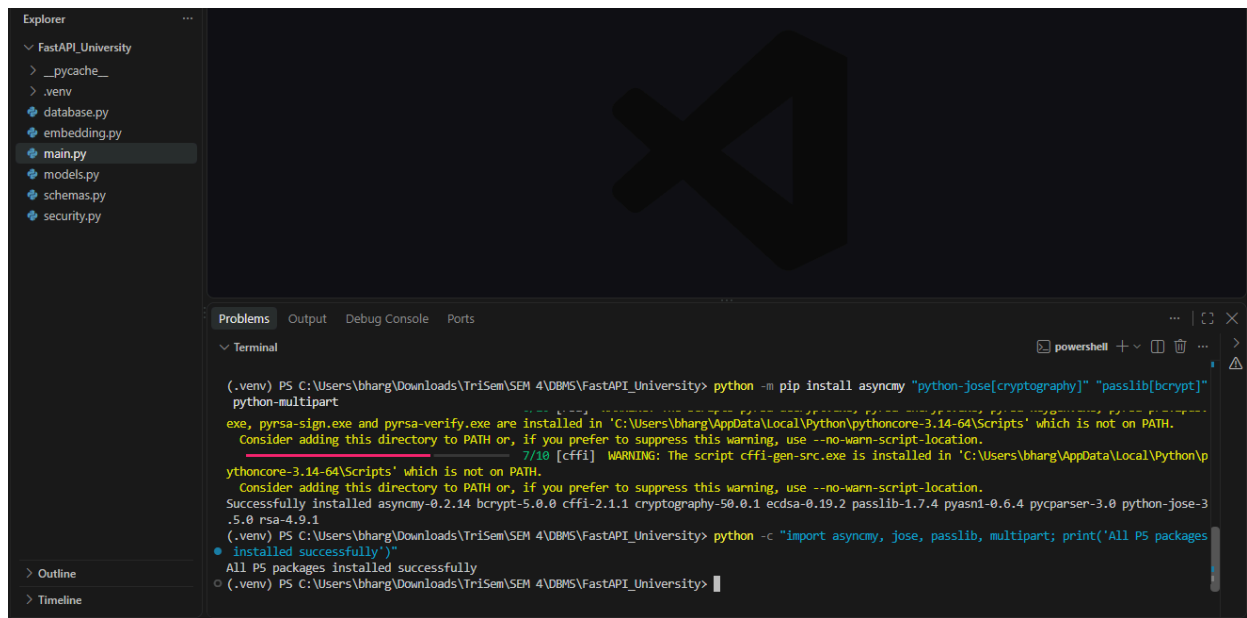

Curl		
<pre>curl -X 'POST' \ 'http://127.0.0.1:8000/register' \ -H 'accept: application/json' \ -H 'Content-Type: application/json' \ -d '{ "username": "divya", "password": "library123" }'</pre>		
Request URL		
http://127.0.0.1:8000/register		
Server response		
Code	Details	
200	Response body <pre>{ "message": "Member registered successfully", "username": "divya", "role": "member" }</pre> Download Response headers <pre>content-length: 79 content-type: application/json date: Tue, 15 Sep 2026 07:15:55 GMT server: uvicorn</pre>	
Responses		
Code	Description	Links
200	Successful Response	No links

Responses

Curl

```
curl -X 'POST' \
  'http://127.0.0.1:8000/login' \
  -H 'accept: application/json' \
  -H 'Content-Type: application/x-www-form-urlencoded' \
  -d 'grant_type=password&username=divya&password=library123&scope=&client_id=string&client_secret=*****'
```

Request URL

http://127.0.0.1:8000/login

Server response

Code	Details
200	Response body <pre>{ "access_token": "eyJhbGciOiJIUzI1NiIsInR5cCI6IkpXVC9.eyJzdWIiOiJkaXZ5YSIsInVubGU0IjtzZm1iZXI1CjleHAiOiJlE3ODk0NjAyMTV9.6xsUX1EPml_Dc48RWNjULT6659VkhA4F6QWTOAX1BA8", "token_type": "bearer" }</pre> Download Response headers <pre>content-length: 186 content-type: application/json date: Tue, 15 Sep 2026 07:16:55 GMT server: uvicorn</pre>

Responses

Code	Description	Links
------	-------------	-------

Available authorizations

Scopes are used to grant an application different levels of access to data on behalf of the end user. Each API may declare one or more scopes.
API requires the following scopes. Select which ones you want to grant to Swagger UI.

OAuth2PasswordBearer (OAuth2, password)

Authorized

Token URL: /login

Flow: password

username: divya

password: *****

Client credentials location: basic

client_secret: *****

Logout

Close

```
'http://127.0.0.1:8000/books' \
-H 'accept: application/json' \
-H 'Authorization: Bearer eyJhbGciOiJIUzI1NiIsInR5cCI6IkpXVCJ9.eyJzdWIiOiJkaXZ5YSIsInJvbmGUiOiJtZWliZXIiLCJleHAiOiE3ODk0NjA1MjB9.0Wq97K7zIV7rPdqsLCgn5UoPPY1zzj'
-H 'Content-Type: application/json' \
-d '{
  "title": "Python for Beginners",
  "author": "John Smith",
  "isbn": "9781234567890",
  "price": 450.00,
  "published_date": "2024-06-10",
  "description": "An introduction to Python programming."
}'
```

Request URL

http://127.0.0.1:8000/books

Server response

Code	Details
------	---------

201

Response body

```
{
  "message": "Book added successfully",
  "book_id": 1,
  "added_by": "divya"
}
```



Download

Response headers

```
content-length: 68
content-type: application/json
date: Tue, 15 Sep 2026 07:22:28 GMT
server: uvicorn
```

Responses

Code	Description
------	-------------

Li

