

Twister framework user guide

Version 2.005
Date: 30 Aug 2013

Contents

- 1 - [What is Twister](#)**
- 2 - [How to install the framework](#)**
- 3 - [Dependencies list](#)**
- 4 - [Twister services](#)**
- 5 - [How to compile the Java GUI](#)**
- 6 - [Overview of the Java GUI](#)**
- 7 - [How to define the suites and add tests](#)**
- 8 - [How to run the test files](#)**
- 9 - [Command line interface](#)**
- 10 - [How to configure the framework](#)**
- 11 - [Performance and troubleshooting](#)**

1 - What is Twister?

Twister is an **open source** test automation framework.


The code can be downloaded from: <https://github.com/Luxoft/Twister>.

Twister helps building functional, regression and load test suites.

Key features of Twister:

- web based GUI intuitive & user friendly interface ;
- easy to manage tests/ suites/ projects ;
- multi-user architecture, users have groups and roles ;
- real time monitoring of execution ;
- distributed execution: SUT's can be tested in parallel ;
- against same or different set of tests ;
- flexible reporting mechanism: DB schema is not fixed and there is no need to change framework to fit with a new DB schema ;
- support for different scripting languages and for record & play GUI tools ;
- support for Continuous Integration, Source Revision Control, Bug tracking ;
- support for GUI/ backend plugins: specific functionality loaded dynamically ;
- OpenFlow 1.0 and 1.3 modules available for conformance testing.

Concept

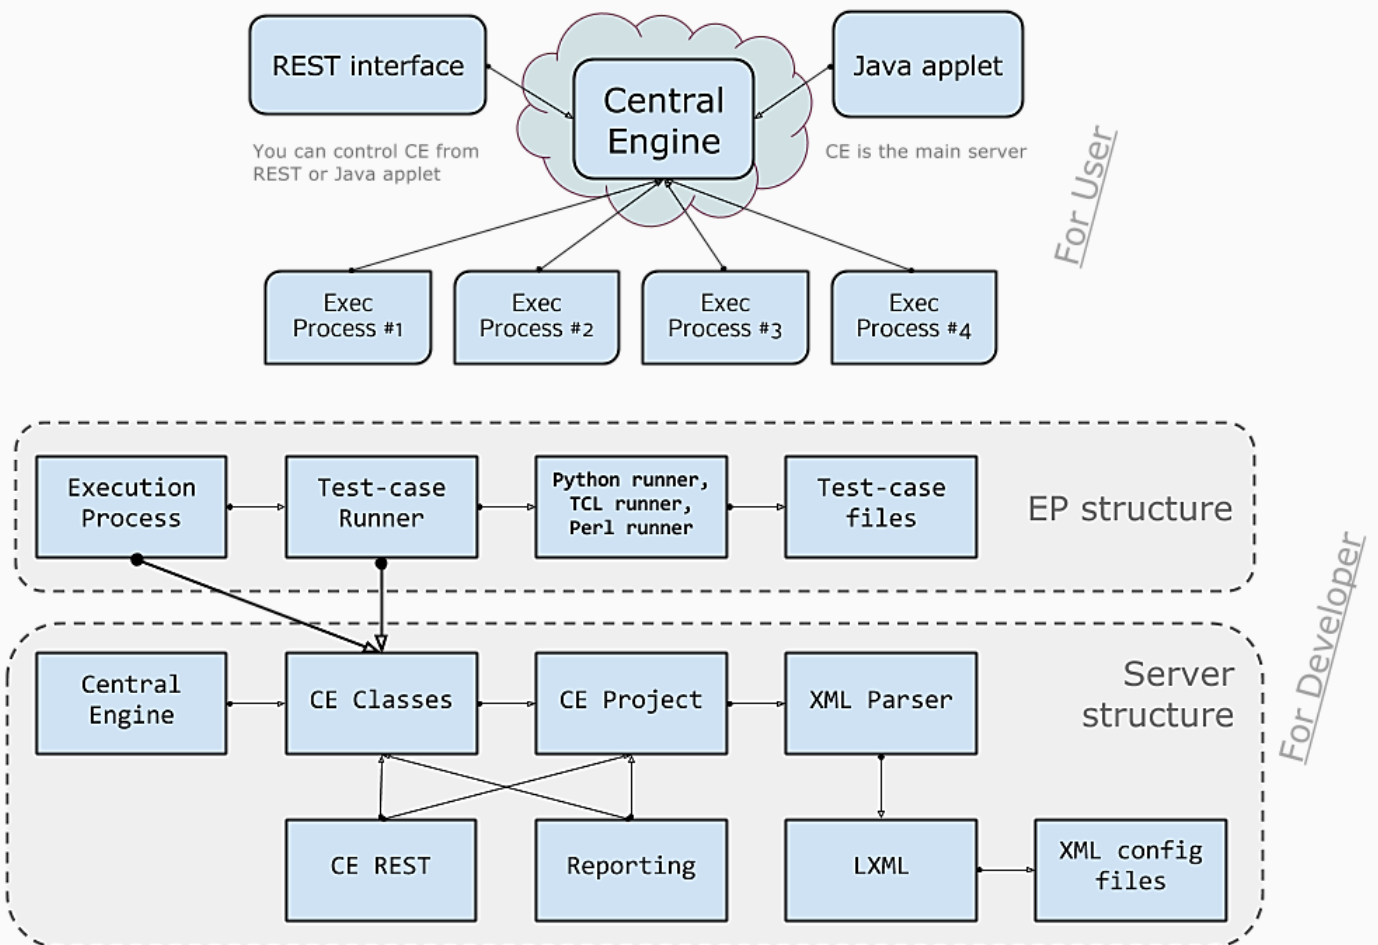

2 - How to install the framework

In order to install the Twister Framework, a few requirements must be met:

- **A Linux machine.** All the services must run on **Linux** (tested on *Ubuntu* and *OpenSuse*);
- **Python 2.7.** Python is installed by default, on most Linux systems; the framework is written and tested in Python 2.7;
- **Python Tkinter.** Required only if you need to run TCL tests. This is included by default in Python, but some Linux distributions don't have the ``python-tk`` lib, so it has to be installed with: ``sudo apt-get install python-tk``;
- **TCL Expect libraries.** Required only if you need to run TCL tests with Expect. To test the functionality, open a Python 2.7 interpreter, then type:

```
from Tkinter import Tcl
t = Tcl()
t.eval('package require Expect')
# If this fails, you must install Expect from your package manager, or compile it from sources
# The sources are at: sf.net/projects/expect; download, extract, ./configure, sudo make install
exit()
```

- **Perl Inline Python.** This is required only if you need to run Perl scripts.

The Twister repository is located at: <https://github.com/luxoft/twister>.

The installer is located in the folder ``installer`` and it's also written in Python. It works only in **Linux**.

It has 3 options that user can select:

- install dependencies
- install Twister server (central engine)
- install Twister client

When installing the dependencies, the script must be executed as **ROOT** or as a user with root privileges. In this stage, all the dependencies (see chapter 3 for a list) are installed on the machine. At this stage, it is **STRONGLY RECOMMENDED** to have an internet connection to allow the setup of all the dependencies; otherwise, you have to install the dependencies manually.

You might need to configure the **proxy** to access the internet. In this case, edit the file ``installer.py``, locate the line with **HTTP_PROXY** and type: `HTTP_PROXY = 'http://UserName:Password@http-proxy:3128'`. If the username and password are not required for your proxy, you can omit them.

When installing the server, it is recommended to run as **ROOT**, but is not mandatory.

In order to serve the Java applet, you will also need **Apache** or **Lighttpd** server and **Open-SSH** server.

The recommended command for starting the installer:

```
sudo python2.7 installer.py
```

The *Twister Client* doesn't have any required dependencies. *`Scapy`* is optional, used only if you need to run the packet sniffer. **Some tests and libraries will require additional dependencies!**

For example: ``paramiko``, ``pExpect``, ``RpcLib``, ``Suds``, ``Requests``, or ``Gevent``. If you need to run these tests or libraries, you can install ``pip`` (tool for installing and managing Python packages - www.pip-installer.org) and use ``sudo pip install <package>``.

The installer will guide you through all the steps:

1. Select what you wish to install (*dependencies*, *client*, or *server*);
2. If the ``twister`` folder is already present, you are asked to back up your data in order to continue, because everything is DELETED, except for the ``config`` folder. The backup has to be done manually.

Twister Client will be installed in the home of your user, in the folder ``twister``; this folder cannot be changed. The server will be installed by default in ``/opt/twister``, but it can be changed.

NOTE: The Twister framework cannot be installed on Windows OS because of Python dependencies. However, some specialized EP's can be used on Windows OS for specific test cases type (e.g. Selenium, Sikuli and Test Complete).

3 - Dependencies list

The dependencies will be installed automatically when you first install Twister. If an internet connection is not available, the installer will use the packages from ``installer/packages`` folder.

- **LXML:** (www.lxml.de/)

- XML and HTML documents parser;
- LXML is included in Ubuntu by default. The other Linux distributions must install it;

- **MySQL-python:** (mysql-python.sourceforge.net/)

- Connects to MySQL databases. It is only used by the Central Engine;
- MySQL-python requires the *python2.7-dev* headers in order to compile;

- **CherryPy:** (www.cherrypy.org/)

- High performance, minimalist Python web framework;
- CherryPy is used to serve the Central Engine, Resource Allocator and Reports;

- **Mako:** (www.makotemplates.org/)

- Hyperfast and lightweight templating for the Python platform;
- Mako is used for templating the Central Engine REST and Report pages;

- **PyCrypto:** (dlitz.net/software/pycrypto/)

- The Python Cryptography Toolkit;
- PyCrypto is used to encrypt and decrypt sensitive data, for example user passwords;

- **Paramiko:** (github.com/paramiko/paramiko/)

- Native Python SSHv2 protocol library;
- Paramiko is used by the Central Engine to check the user and by the Twister SSH Lib to connect to remote machines;

~ Optional ~

- **Scapy:** (pypi.python.org/pypi/scapy-real/)

- Interactive packet manipulation tool;
- **Scapy**, is used by the Execution Process to capture packets and send them to the applet;

- **pExpect:** (sourceforge.net/projects/pexpect/)

- Spawn child applications, control them, respond to expected patterns in their output;
- **pExpect is optional**; it is used by some Python test cases to connect to FTP/ Telnet;

- **RpcLib:** (<https://github.com/arskom/rpclib/>)

- Create web services in Python (soap, rpc, rest servers);
- **RpcLib is optional**; it is used by some Python test cases;

- **Suds:** (<https://fedorahosted.org/suds/>)

- Lightweight SOAP python client for consuming Web Services;
- **Suds is optional**; it is used by some Python test cases;

- **Requests:** (<http://docs.python-requests.org/>)

- Elegant and simple HTTP library for Python, built for human beings;
- **Requests is optional**; it is used by some Python test cases to connect to HTTP servers;

- **Gevent:** (<http://www.gevent.org/>)

- Co-routine-based Python networking library that provides a high-level synchronous API;
- **Gevent is optional**; it is used by some Python test cases to create sockets and threads;

4 - Twister services

Twister framework has 2 services:

1. The **Central Engine** = central server for script and library files. It includes the Resource Allocator, Service Manager and Reporting Server. This can be run as a normal user, but the recommendation is to be run as **ROOT** in order to have read/ write access to all files.
2. The **Execution Process Manager** = client service that manages the EPs that have to be started for execution of test cases. This can be run as normal user, but for some functionality (packet sniffer) it has to be run as **ROOT**.

The executable script for central engine is located in `/opt/twister/bin/start_server`. The script doesn't require an input parameter, it has to be executed as is and it will launch the server in the background.

The executable script for execution process(s) manager is located in `/$USER_HOME/twister/bin/start_client`.

If your default Python executable is NOT Python2.7, you must edit the `start_server` and `start_client` files manually, locate the line: `PYTHON_PATH=/usr/bin/python` and replace the value with the path to Python2.7, for example `/usr/local/bin/python2.7`.

This script can take the following parameters:

- start – to start the service;
- start silent – start the service and no messages are printed
- stop – to stop the service
- restart – to restart the service
- status – to display the status of the service and what EPs are running

The execution process manager service must be configured before run. You have to edit the file `epname.ini` from `twister/config/` folder; it contains the **name** of the available EPs, the **IP** and the **port** of the CE instance that it will run on. For every EP, there is an optional tag EP_HOST that can be set by the user to restrict the machine where that EP can be started. By default, if this tag is not set, the EP can be started. Otherwise, the comparison between the EP_HOST and the local machine is done and if there is a match, the EP is allowed to be started.

When the `start_client` script with `start` option is executed, a client service is started. This service is used to manage the start and stop of available execution processes on demand. The list of available EPs is obtained from the `epname.ini` file.

The `start_client` script reads this file and registers all the available EPs to the central engine so the user is able to select EPs from GUI when execution is needed. When testing is started, the CE send the list of selected EPs to the EP manager and this one starts on demand all the EPs requested by the user. When execution of the test cases is completed, the EPs are stopped automatically by the EP manager.

The `start` option can be used in conjunction with `silent` to stop printing messages in terminal.

To stop the EP manager, the `stop` option must be used.

To restart the EP manager, the `restart` option must be used. Restart of the EP manager must occur when the list of available EPs is changed in the `epname.ini` file.


The status of the client and the list of started EPs is obtained using `status` option. The started EPs are listed only when the testing is in progress.

If needed, the EP manager can be started automatically at system boot, by adding it into the rc files. Given the EP manager is user specific, it must be added for every user that has Twister client installed and it has to be started as that user.


4.1 - Central Engine web interface

While the **Central Engine** service is running, you can access a web interface that allows viewing some statistics, logs and users connected. You can also start and stop the processes.

Management interface Home;

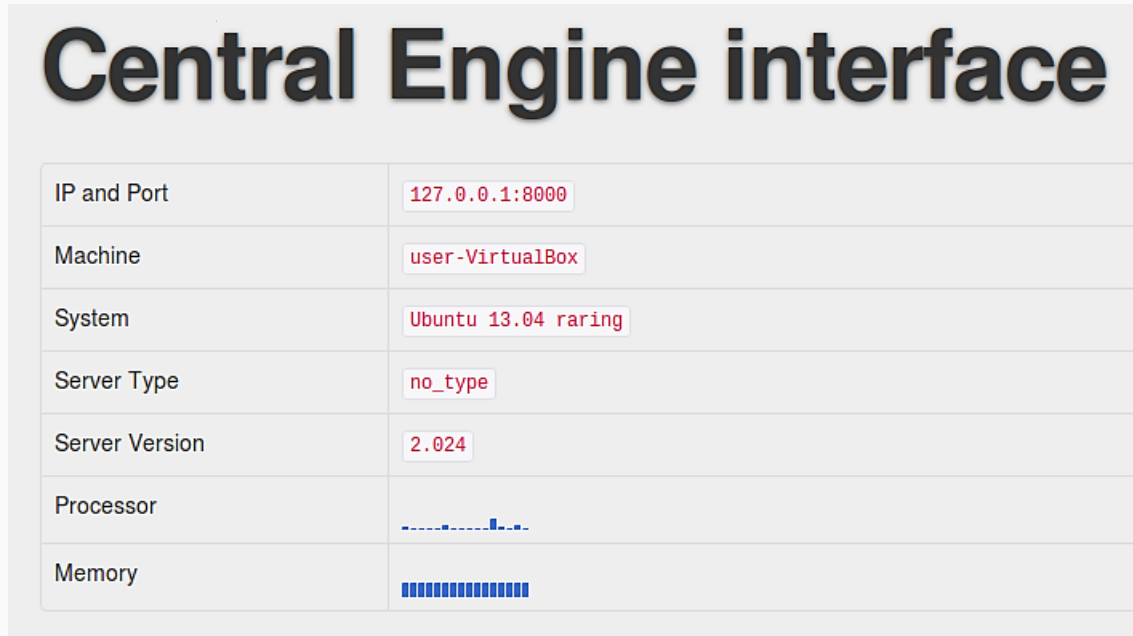

Central Engine Logs;

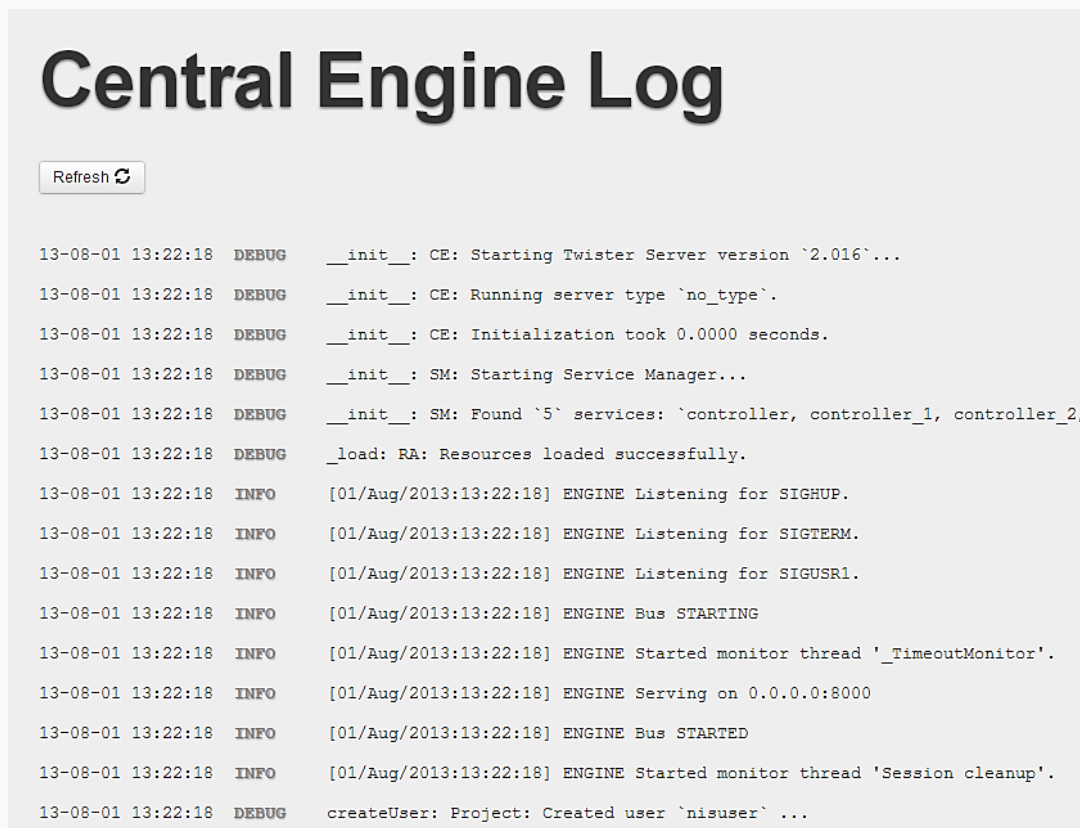

User interface;

User `user`

Status	stopped (▶ start ■ stop ▲ reset!)
Master config	/home/user/twister/config/fwmconfig.xml
Project config	/home/user/twister/config/testsuites.xml
DB config path	/home/user/twister/config/db.xml
E-mail config path	/home/user/twister/config/email.xml
EPs file	/home/user/twister/config/epname.ini
Logs path	/home/user/twister/logs
Tests path	/home/user/twister/demo
User groups	user, admin
User roles	CHANGE_DB_CFG, CHANGE_EML_CFG, CHANGE_FWM_CFG, CHANGE_GLOBALS, CHANGE_PLUGINS, CHANGE_PROJECT, CHANGE_SERVICES, CHANGE_TESTBED, CREATE_PROJECT, DELETE_PROJECT, EDIT_TC, RUN_TESTS

Control the processes;

HomeProcessesLogs

Processes for `tscgquest`

EP-1001

EP-1002

EP-1003

EP-1004

EP-1005

Actions: ▶ | ■ | ■ | ✎

Suite1

- /home/tscgquest/twister/demo/testsuite-python/init.py
- /home/tscgquest/twister/demo/testsuite-python/test002.py
- /home/tscgquest/twister/demo/testsuite-python/test001.py
- /home/tscgquest/twister/demo/testsuite-python/test003.py

Check all user logs;

Logs for `tscquest`

logCli EP-1001

logCli EP-1002

logDebug

logRunning

logSummary

logTest

Py **debug**: For EP EP-1001, CE Server returned a new status: running.

EP **debug**: Received start signal from CE!

TC **debug**: TestCaseRunner started with User: tscquest ; EP: EP-1001.

TC **debug**: Connected to proxy, running tests!

Downloading library `/home/tscquest//twister/.twister_cache/EP-1001/ce_libs/ExposedLibraries.py` ...

Downloading library `/home/tscquest//twister/.twister_cache/EP-1001/ce_libs/TscFtp.py` ...

Downloading library `/home/tscquest//twister/.twister_cache/EP-1001/ce_libs/TscTelnet.py` ...

====

Starting suite `100:Suitel`

====

Downloading library `/home/tscquest//twister/.twister_cache/EP-1001/ce_libs/TscFtp.py` ...

Downloading library `/home/tscquest//twister/.twister_cache/EP-1001/ce_libs/TscTelnet.py` ...

This web service can be accessed in a browser, by going to: `[http://central-engine-IP:PORT/`](http://central-engine-IP:PORT/),
for **example**: `[http://localhost:8000/`](http://localhost:8000/).

5 - How to compile the Java GUI

The Java Graphical User interface compiled version can be found at ``twister/binaries/applet``. You have to copy the ``applet`` folder in ``/var/www`` and if you have an *Apache* or *Lighttpd* Server, you will be able to access it in the browser.

If you have changed the sources, or you want to compile the JAR files yourself, the sources are located at ``twister/client/userinterface/java``. Some binary JAR files are already included in folders ``target`` and ``extlibs``, respectively.

After compilation, you have to move the JAR files, so that a server can serve them.

Steps **1-2** require **Oracle JDK 1.7** (Oracle Java Development Kit).

Step **5** requires **Apache** or **Lighttpd** Server and your machine must have **OpenSSH Server** enabled on port 22.

Here are the steps:

1. Generate a key store, or import a certificate (*this is done only **the first time!***);

```
PATH_TO_JDK/bin/keytool -genkey -keyalg rsa -validity 360000 -alias Twister -keypass password -storepass password
```

OR

```
PATH_TO_JDK/bin/keytool -import -alias Twister -file certificate_file.cer
```


2. Go in ``client/userinterface/java``. Then, if you are on **Windows**, run ``pack.bat``, on **Linux** run ``.`./build.sh``.
You might need to edit these files, to change the path to **JDK_PATH**;
3. Move all files from ``target`` and ``extlibs`` in ``/var/www/twister`` (path for Apache, or other web servers);
4. Copy ``jquery.min.js`` from ``/opt/twister/server/static/js`` also in ``/var/www/twister``;
5. Open a browser that supports Java Applets and go to: <http://localhost/twister>.

6 - Overview of the Java GUI


The **first tab (Suites)** is split in four panes:

- **Top left**, is where the test suites are defined. Any file from the right can be dragged in here. The files can be checked/ unchecked; the files that are not checked will not run;
- **Top right**, is where the test files are located. These files can be used in the suites;
- **Bottom left**, is where the project, suite and test information is added. The suite information is defined in the file ``DB.xml``, section name ``field_section`` (*more about this in the configuration section*);
- **Bottom right**, you can see the title and description of the currently selected test file.

A configuration, with Python scripts:

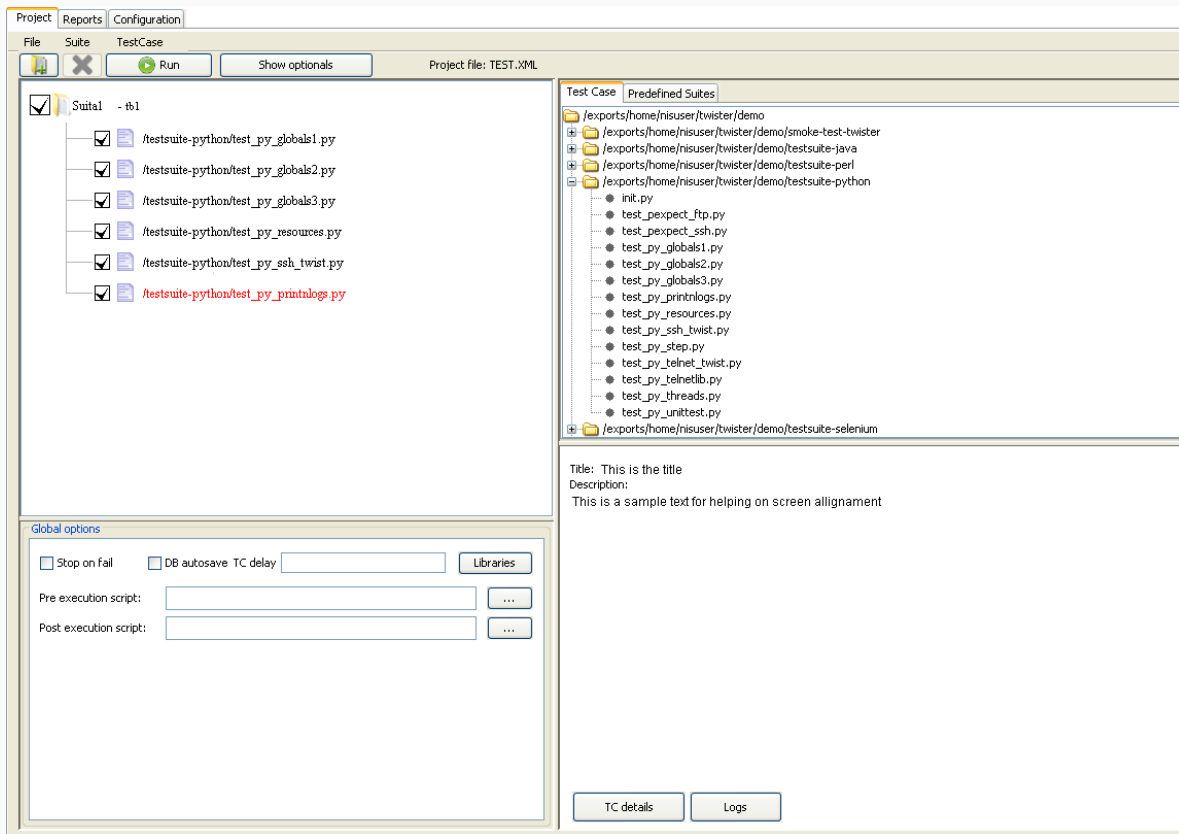


A different configuration, with TCL scripts:

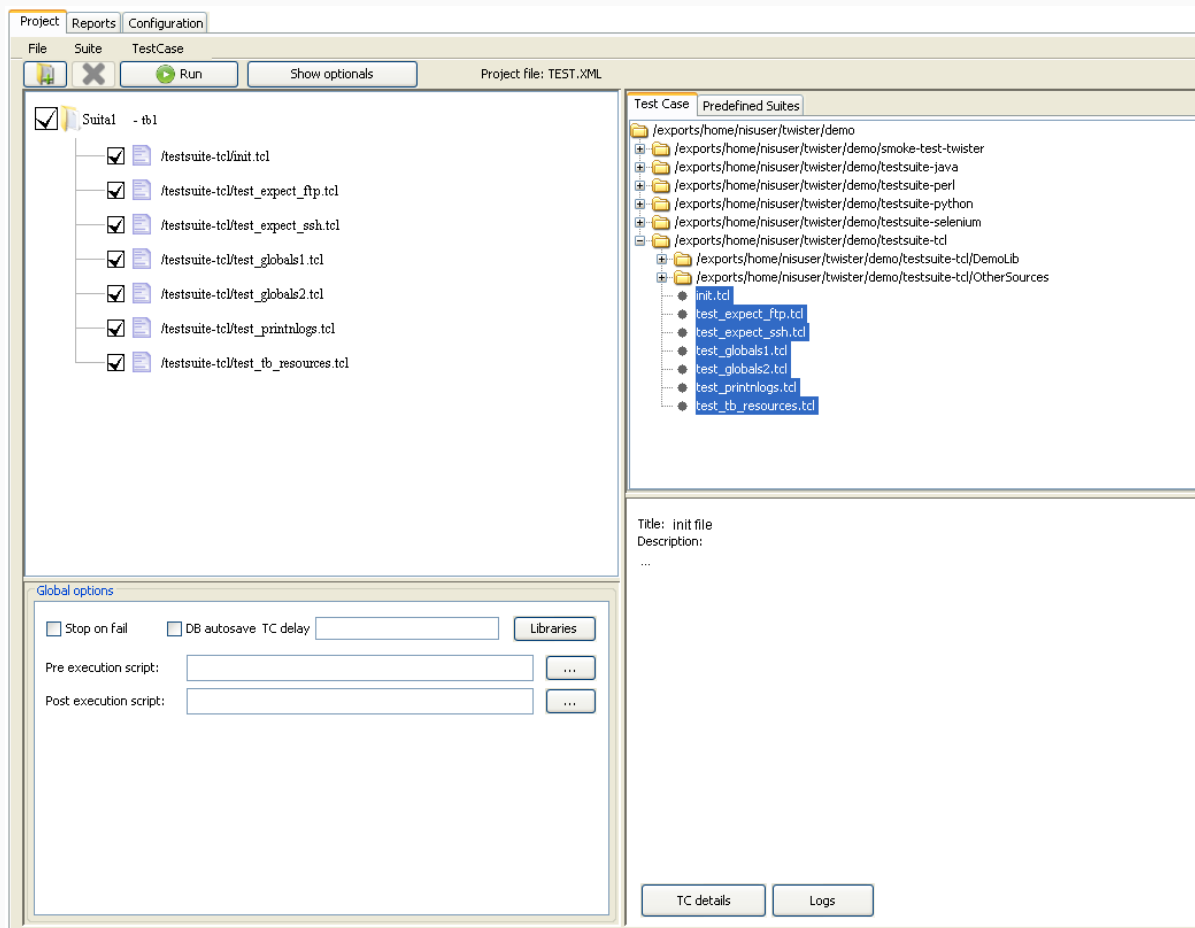

While running:

- You can check test lists with their statuses. By default, all tests are in pending, unless they recently ran, in which case the most recent status is displayed;
- Logs for the tests. The logs can be cleaned, exported, or searched for keywords.


Here the Central engine is stopped; in this case you can see the most recent statuses:

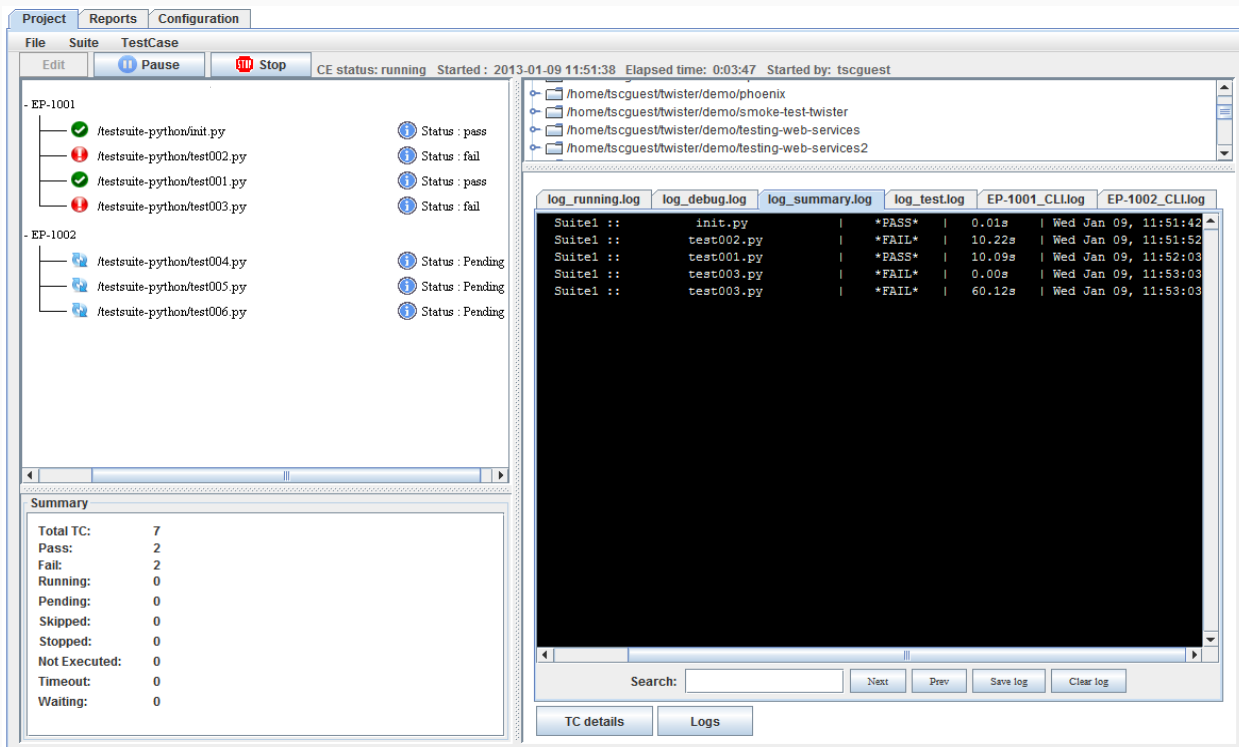

At the top, there are two buttons, which control the Central Engine: **Run/ Pause** and **Stop**.

Also at the top, is the status of the Central Engine, the time of the last start, time elapsed and the user that started it.

While the Central engine is running:

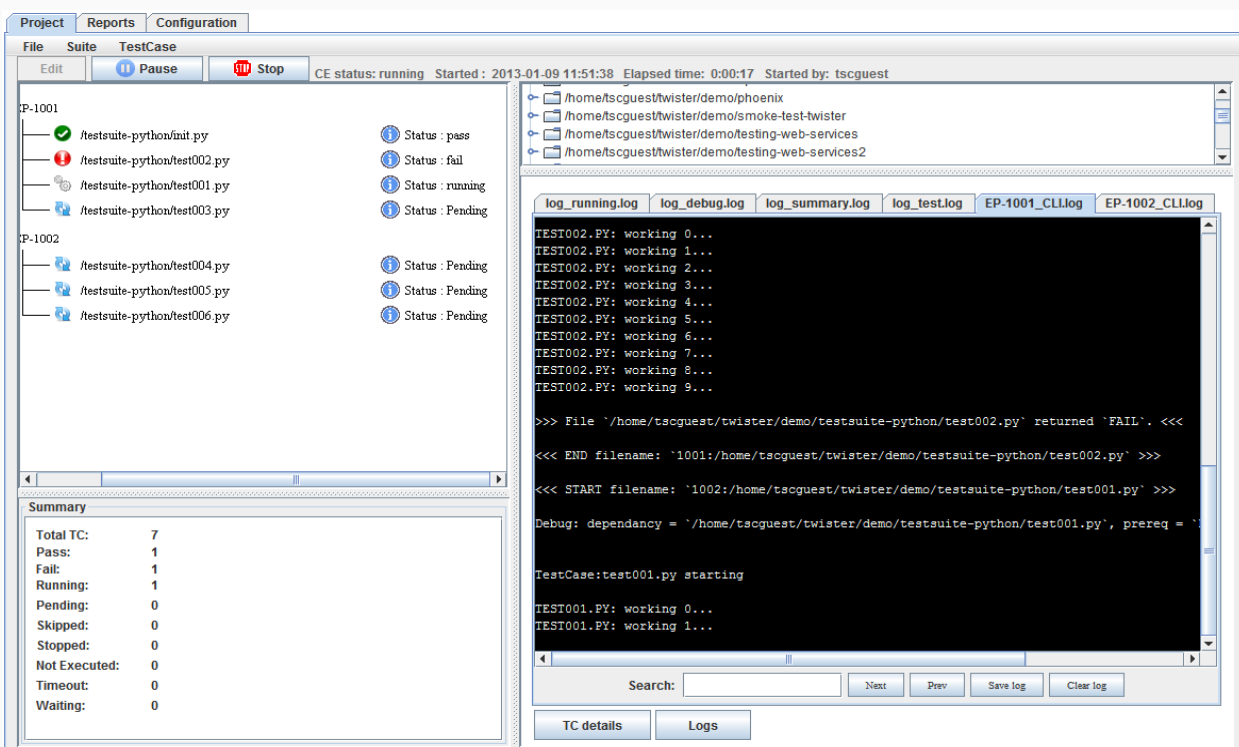

The Reports Tab

When clicking on it, the reports page will open in a new tab.

Reporting home (this will look different, depending on the configuration!)

Home

Details (build)

Details (suite)

History

Summary

Pass Rate

goto Yahoo

goto Google

Help

Twister reporting

Welcome !

Please choose a report from the left.

A report with user chosen fields;

Home

Details (build)

Details (suite)

History

Summary

Pass Rate

goto Yahoo

goto Google

Help

Required fields

Select build V06_05.190

Select Cancel

The same report, after the user chose the build;

Home

Details (build)

Details (suite)

History

Summary

Pass Rate

goto Yahoo

goto Google

Help

Details (build) Report

for Build="V06_05.190"

10 records per page

Search:

no_regression	suite_name	test_name	status	date	build	run_no	logfilename
45999	RETRIEVE	RETRIEVE_001	PASS	2008-10-18 12:43:44	V06_05.190	1	V06_05.190_2007_10_18_12_36
46000	BO	T-001	PASS	2008-10-18 12:59:54	V06_05.190	1	V06_05.190_2007_10_18_12_36
46001	BO	T-002	PASS	2008-10-18 13:01:10	V06_05.190	1	V06_05.190_2007_10_18_12_36
46002	BO	T-003	PASS	2008-10-18 13:02:24	V06_05.190	1	V06_05.190_2007_10_18_12_36
46003	BO	T-007	PASS	2008-10-18 13:02:56	V06_05.190	1	V06_05.190_2007_10_18_12_36
46004	BO	T-008	PASS	2008-10-18 13:03:28	V06_05.190	1	V06_05.190_2007_10_18_12_36
46005	BO	T-009	PASS	2008-10-18 13:04:02	V06_05.190	1	V06_05.190_2007_10_18_12_36
46006	BO	T-012	PASS	2008-10-18 13:05:13	V06_05.190	1	V06_05.190_2007_10_18_12_36
46007	BO	T-013	PASS	2008-10-18 13:06:27	V06_05.190	1	V06_05.190_2007_10_18_12_36
46008	BO	T-014	PASS	2008-10-18 13:07:43	V06_05.190	1	V06_05.190_2007_10_18_12_36

no_regression suite_name test_name status date build run_no logfilename

Showing 1 to 10 of 739 entries

Previous 1 2 3 4 5 Next

The **configuration tab**

Here, you can configure:


- Central Engine port (*default 8000*). This is the port the applet will use for connection;
- the path of the test files, logs files, project files
- the path of the database xml, e-mail xml, EP names;
- additional path for python library files, and the path for predefined suite files
- the names of the log files;
- e-mail configuration, database configuration;
- devices configuration for Test Bed;
- global variables, injected in all Twister test files;
- services configuration
- panic-detect: checks errors in CLI logs.

More about this in `**Configure the framework**` section.

7 - How to define the suites and add tests


When starting the interface, you must first *select* or *create* a **project file**. This file will save your suites, script files and suites configurations.

Each project has a set of global settings:

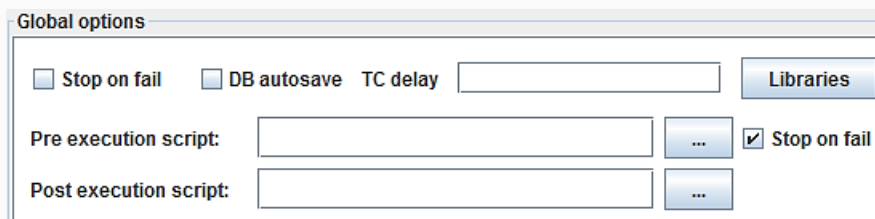

- **Stop on fail** = if a test that is mandatory will fail, or will crash, all the project will fail ;
- **DB Autosave** = after all the tests from all suites finish execution, the Central Engine will automatically save the results into database, without asking the user ;
- **TC Delay** = after each test, the EP will wait X seconds, before starting to execute the next test ;
- **Pre execution script** = this defines a script that can be executed in command line interface; the script from this path will be executed by the Central Engine **before** running any test. The script can be written in any language (Perl, TCL, binary executable, etc.). You cannot use a normal Twister test as a Pre/ Post exec script! If you write a script in an interpreted language, don't forget to add ``#!/usr/bin/env ... your language`` on the first line. If the file is not executable, CE will automatically run ``chmod +x`` on the file ;
- **Post execution script** = this defines a script that can be executed in command line interface; the script from this path will be executed by the Central Engine **after** running all tests. It has the same specifications as the Pre execution script ;




After setting the project file, click on  (Add suite). The required fields are: **the name** of the suite and **one or Test beds** (the workstation(s) where the tests from this suite will run).

- New project file
- Open project file
- Save project file
- Save project as
- Export project
- Delete project file
- Open from local
- Save to local

In order to save the **project file**, use the *File menu* :

You can download the project file locally, to share it with your team members.

A suite is basically a folder, where one or more script/ test files can be added, that will be executed by one or more Test Beds, and implicitly by one or more Execution Processes.

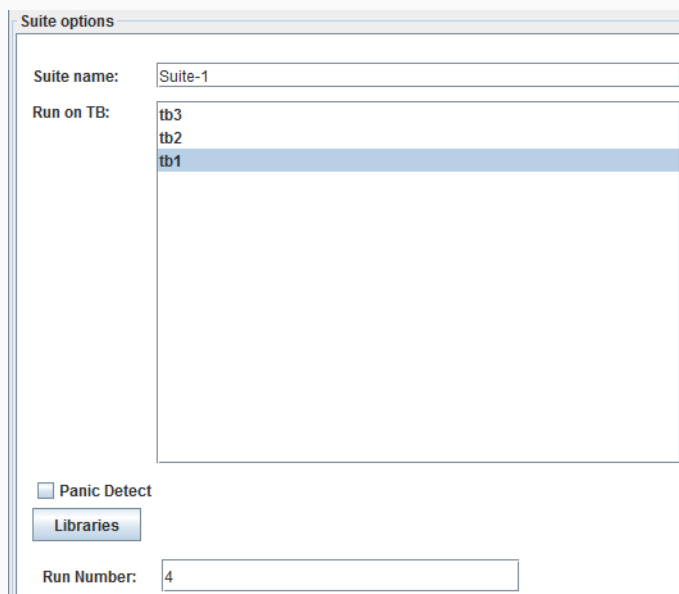


The 'Suite options' dialog box contains the following elements:

- Suite name:** A text field containing 'Suite-1'.
- Run on TB:** A list box containing 'tb3', 'tb2', and 'tb1' (which is selected).
- Panic Detect:** An unchecked checkbox.
- Libraries:** A button.
- Run Number:** A text field containing '4'.

Each suite can also have some properties attached to it, like ``release``, ``build``, ``comments``, etc. These fields are defined in ``DB.xml`` file (*more about this in the database configuration section*) and will look different, depending on the configuration (text box, drop down list, path to a script, etc.) ; these ``meta`` properties are used while saving the results into database.


A suite can be exported for later usage by right clicking it and selecting *Export*:

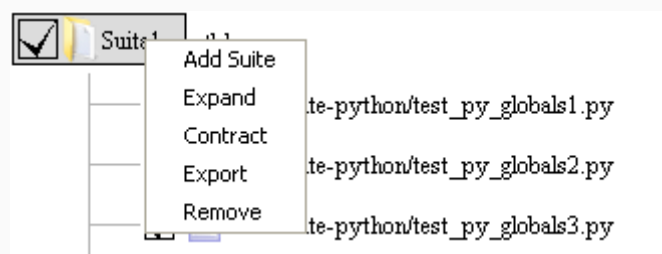

The content of the suite, including the test cases and its sub suites, is saved in an xml file in the *Predefined Suites* path. These exported suites can be loaded in other project using drag & drop from the *Predefined Suites* tab into the suite definition window.

The script/ test files and the suites can be re-arranged anytime, using drag & drop, or can be deleted.

Each script/ test file has a few properties too:

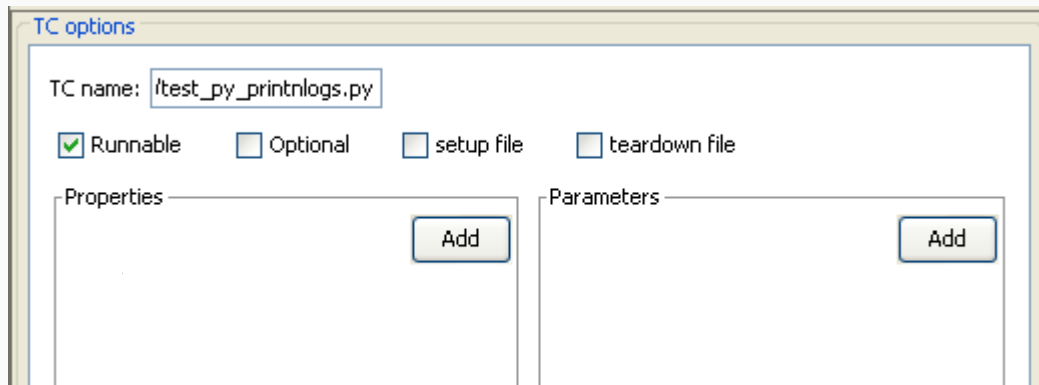

TC options

TC name:

☒ Runnable ☐ Optional ☐ setup file ☐ teardown file

Properties Add

Parameters Add

- A test that is not *Runnable* will be sent to **EP**, but will never execute. You can use this option to transfer configuration files on the EP, without executing them ;
- *Optional* tests that fail, will not stop the execution when the global *Stop on Fail* checkbox is active ;
- *Setup* tests are executed at all times (they have to be runnable) and if they *fail*, the entire Suite is considered *Failed*. Setup files are NOT saved into the database!
- *Teardown* tests are executed at all times (they have to be runnable). They are used to clean-up a suite, even if the suite was aborted because of a failed Setup. Teardown files are NOT saved into the database!

The user can define a list of parameters and properties for every test case.

Both the parameters and the properties are sent to the tests and can be accessed during execution.

The properties: ``type``, ``suite``, ``file``, ``config_files``, ``dependency``, ``status``, ``Runnable``, ``Optional``, ``setup_file``, ``teardown_file`` and ``param`` are reserved for internal use and must NOT be used; more about this in ``How to write Twister tests`` section.


8 - How to run the test files

After all the suites and scripts are set, click on , to start the execution.

What will happen is that, all **checked** scripts from all suites will run, in order. The execution doesn't stop if one of the scripts fails, excepting the case when the test that fails is *mandatory* and the *Stop on Fail* checkbox is checked.









If the **Run** button is disabled, it means that the Central Engine service is not running, so the execution cannot start.

If the **Run** button is enabled, you can start the execution. When you start the execution, the **Stop** button will activate, to allow stopping the Central Engine and killing all the running processes and the **Run** button will become **Pause**, allowing to pause after the current tests finishes its execution.

If the Central Engine was started recently, by default all the files will be in state *pending*  .
If a previous run was completed, the most recent status is displayed (*pass, failed, etc.*).

If the execution is stopped prematurely, all files that did not execute (were pending), have status NOT EXECUTED.

The states for the files and their respective icons are:

-  (running) while the file is running;
-  (pause) if the test is paused;
-  (success) if the execution was successful;
-  (failure) if the execution failed;
-  (skip) if the file was marked as skip (*runnable=false*);
-  (abort) if the file was stopped while running;
-  (not executed) if the file was paused and was stopped instead of being resumed;
-  (dependency) is the file depends on another file and the dependency didn't finish its execution, so this file is waiting.

While the tests are running, the logs from the left will update, showing the live output.

When a test is completed, the icon will change to Pass or Fail. All the history of result can be seen in the ``log_summary.log``.

The logs can be cleaned, exported, or searched for keywords, by clicking the buttons from the bottom.

After all the tests are run, if the e-mail is configured, CE sends an e-mail with the report and then, all tests are saved into the database, excepting the *Setup* and *Teardown* files.

9.0 - Command line interface

The Command-line script can be found in `twister/bin`, both on server and client side.

This script can be used to:

- start, stop, pause the execution;
- show all users that are running tests;
- display what EPs are enabled for your user;
- show what is the start time for this run, suites list and tests list;
- show execution summary status: how many test cases are planned for execution, how many were executed, how many passed, how many failed;
- show execution details status: the same, plus status per test case;
- queue tests during run time (the user is not forced to stop the execution in order to add more files for execution). Queuing a file while the execution is stopped has no effect - it will be discarded when the execution is started. Instead, the project file has to be updated in order to include that file.
- dequeue tests during run time, before they are executed. Dequeuing a file while the execution is stopped has no effect.

You can use `./cli.py --help` anytime, to see the usage information.

```
Usage: cli.py --server <ip:port> --command [...parameters]
```

Options:

```
--version          show program's version number and exit
-h, --help         show this help message and exit
--server=SERVER    Your user and password @ central engine IP and port
                   (default: http://user:password@127.0.0.1:8000/)
-u, --users        Show active and inactive users.
--eps              Show active and inactive Eps.
--stats            Show stats.
--details          Show detailed status for All files.
--status-details=STATUS_DETAILS
                   Show detailed status for running, finished, pending,
                   or all files.
-q QUEUE, --queue=QUEUE
                   Queue a file at the end of a suite. Specify queue like
                   `Suite:file_path`.
-d DEQUEUE, --dequeue=DEQUEUE
                   Un-Queue 1 or more files. Specify like `EP,
                   EP:suite_id, EP:Suite, or EP:file_id`.
-s SET, --set=SET  Set status: start/ stop/ pause. (Must also specify a
                   config and a project)
-c CONFIG, --config=CONFIG
                   Path to FWMCONFIG.XML file.
-p PROJECT, --project=PROJECT
                   Path to PROJECT.XML file.
```

Commands:

- `./cli.py -u` - Show active and inactive users ;
- `./cli.py -eps` - Show active and inactive Eps ;
- `./cli.py -stats` - Show minimal stats ;
- `./cli.py -details` - Show detailed stats, per ep + suite + test ;
- `./cli.py --status-details <running| finished| pending| all>` ;
- `./cli.py --queue <Suite1:some_path/some_file.py>`
- Queue a file at the end of a suite. Must specify queue in the form of ``suite:file_path`` ;
- `./cli.py --dequeue <EP | EP:suite_id | EP:Suite | EP:file_id>`
- Un-queue a file from a project, before it is executed ;
- `./cli.py -s stop` | `./cli.py -s start -p ~/twister/config/testsuites.xml --config ~/twister/config/fwmconfig.xml`
- start, pause, or stop the central engine.

10.0 - Twister configuration files

Twister has a few configuration files, in XML, ini and Json format.

There are 2 types of configurations: per user (located at `/$USER_HOME/twister/config`) and global for all users (by default located at `/opt/twister/config`).

- **fwmconfig.xml**: the **master framework config**. Contains the paths to all the other config files. Config saved per user;
- **epname.ini**: contains all the EPs for the current user. **This must be edited manually**. Config saved per user;
- **email.xml**: contains all the information necessary to send an e-mail from Twister. Config saved per user;
- **db.xml**: contains all the information about saving and reading from the MySQL database. Config saved per user;
- **globals.xml**: contains all global variables, per user;
- **plugins.xml**: contains information about all plugins, per user;
- **testsuites.xml**: contains all suites and all files for the current run. Saved per user;
- **resources.json**: contains all the resources from Resource Allocator server, all testbeds and devices. It's a global config;
- **services.ini**: contains all the services from Service Manager. It's a global config;
- **server_init.ini**: contains the current server type: **no_type**, **development**, or **production**. In ``production`` mode, all user roles are enabled. In ``no_type`` mode, all roles are enabled, but changing users is disabled. It also contains the server location description;
- **users_and_groups.ini**: contains all users, groups and roles;

Most of the files are generated automatically from the Java applet. They **should not** be edited manually, unless specified otherwise.

10.1 - Configure the paths

The screenshot shows the 'Configuration' tab of a software interface. On the left is a sidebar with buttons: Paths, Email, Database, Test Beds, Global Parameters, Panic Detect, Services, and Plugins. The main area contains several configuration sections:

- TestCase Source Path**: Master directory with the test cases that can be run by the framework. Path: `/home/tscgquest/twister/demo`.
- Projects Path**: Location of projects XML files. Path: `/home/tscgquest/twister/config/users`.
- EP name File**: Location of the file that contains the Ep name list. Path: `/home/tscgquest/twister/config/epname.ini`.
- Logs Path**: Location of the directory that stores the logs that will be monitored. Path: `/home/tscgquest/twister/logs/`.
- Log Files**: All the log files that will be monitored.

Running:	<code>log_running.log</code>
Debug:	<code>log_debug.log</code>
Summary:	<code>log_summary.log</code>
Info:	<code>log_test.log</code>
Cli:	<code>CLI.log</code>

★ All the paths below refer to the computer where the **Central Engine** is running.

Test case source path represents the folder where all test files are located. The files here can be dragged inside suites, in the first tab (suites).

Projects path is the folder where the profiles are saved in the first tab; usually this doesn't need to be changed.

EP Name file stores the list of EPs (the workstations where tests will run). An `EP` is just a name to uniquely identify a computer, it can be any string.

Logs path is the folder where all the logs are written. There are 5 major logs: log running, log debug, log summary, log info, and log CLI. Each of the logs will be saved in the logs path, with the name defined in the configuration. Usually, the logs don't need to be changed.

E-mail XML path, **Database XML path** and **Globals XML path** are the files that store the information for the next 3 tabs. You can have multiple files, and switch between configurations.

The Central Engine port is, of course, the port where the applet connects to the server. The default value is 8000.

Library path defines a path where user defined python libraries can be found. The user libraries will be used together with the system libraries, stored in `/opt/twister/lib`, to execute the test cases.

Predefined suites path this defines a path where user can save suites (different from project files) for future usage. The user can export a suite from a project file and import it in another project file.

10.2 - Configure the e-mail

SMTP server

IP/Name:

Port:

Authentication

User:

Password:

From:

Email List

Subject

Message

Disabled ☐

Here you can configure the parameters required to connect to a SMTP server and send an e-mail.

The Central Engine will send the e-mail every time the execution finishes for ALL the test files.

The most important fields are: SMTP *IP* and *port*, *username*, *password*, *from* and the *e-mail list*.

Optionally, you can change the subject and add a few lines in the message body.

In order to test the connection to the SMTP server, using the user and password, you can send a test e-mail, using the button `Test` in the applet.

Both the subject and the message, can contain insert fields from `DB.xml`, from `*<insert_section>*` tag.

For example, if you defined the fields with IDs `release_id`, `build_id`, `suite`, you can write the subject like :

```
E-mail report for R{release_id} B{build_id} - {suite} [{date}]
```

If your release number is `2`, build number is `15` and suite is `Branch Test1`, the subject will be generated like:

```
E-mail report for R2 B15 - Branch Test1 [2012.03.23 13:24]
```

10.3 - Configure the database

Paths

Email

Database

Test Beds

Global Parameters

Panic Detect

Services

Plugins

About

Database

Database: TestDb

Server: 127.0.0.1

User: user

Password: ●●●

Field Section

Insert Section

Reports Section

Field Section

ID: res id	Field Name: id	From Table: result	SQL Query: select MAX(id)+1	Label:	Type: DbSelect	<input type="checkbox"/>	GUI Defined	<input checked="" type="checkbox"/>	Ma
ID: log id	Field Name: id	From Table: logs	SQL Query: select MAX(id)+1	Label:	Type: DbSelect	<input type="checkbox"/>	GUI Defined	<input checked="" type="checkbox"/>	Ma
ID: relea	Field Name: id	From Table: sites	SQL Query: select DISTINCT i	Label: Releg	Type: UserSelect	<input checked="" type="checkbox"/>	GUI Defined	<input checked="" type="checkbox"/>	Ma
ID: build	Field Name: id	From Table: suite	SQL Query: select DISTINCT i	Label: Build	Type: UserSelect	<input checked="" type="checkbox"/>	GUI Defined	<input checked="" type="checkbox"/>	Ma
ID: suite	Field Name: id	From Table: pri	SQL Query: select DISTINCT i	Label: Suite	Type: UserSelect	<input checked="" type="checkbox"/>	GUI Defined	<input checked="" type="checkbox"/>	Ma
ID: static	Field Name: id	From Table: suts	SQL Query: select DISTINCT i	Label: Static	Type: UserSelect	<input checked="" type="checkbox"/>	GUI Defined	<input checked="" type="checkbox"/>	Ma
ID: comr	Field Name:	From Table:	SQL Query:	Label: Set c	Type: UserText	<input checked="" type="checkbox"/>	GUI Defined	<input type="checkbox"/>	Ma

Add

Save File

Paths

Email

Database

Test Beds

Global Parameters

Panic Detect

Services

Plugins

About

Database

Database: TestDb

Server: 127.0.0.1

User: user

Password: ●●●

Field Section

Insert Section

Reports Section

Insert Section

SQL Statement: INSERT INTO repo test view VALUES(@res id@, \$release id, \$build id, \$suite id, \$station id, ' \$twist

Add

Save File

Paths

Email

Database

Test Beds

Global Parameters

Panic Detect

Services

Plugins

About

Database

Database: TestDb

Server: 127.0.0.1

User: user

Password: ●●●

Field Section

Insert Section

Reports Section

Reports Section

ID: Other	SQL Query:	Label: Other filters	Type: UserText	Remove
ID: Date	SQL Query: SELECT DISTINCT tdate FROM repo test vi	Label: Select date	Type: UserSelect	Remove
ID: DateStart	SQL Query: SELECT DISTINCT tdate FROM repo test vi	Label: Select date St	Type: UserSelect	Remove
ID: zDateEnd	SQL Query: SELECT DISTINCT tdate FROM repo test vi	Label: Select date Ei	Type: UserSelect	Remove
ID: TestStatus	SQL Query: SELECT DISTINCT status FROM repo test vi	Label: Select test sta	Type: UserSelect	Remove
ID: Release	SQL Query: SELECT id.name FROM repo release	Label: Select release	Type: UserSelect	Remove
ID: Build	SQL Query: SELECT id.name FROM repo build	Label: Select build	Type: UserSelect	Remove
ID: Suite	SQL Query: SELECT id.name FROM repo suite	Label: Select suite	Type: UserSelect	Remove
ID: Station	SQL Query: SELECT id.name FROM repo station	Label: Select station	Type: UserSelect	Remove
ID: Total	SQL Query: SELECT * FROM repo test view	SQL Total:	Type: Table	Remove
ID: Details	SQL Query: SELECT * FROM repo test view	SQL Total:	Type: Table	Remove
ID: History	SQL Query: SELECT build id AS 'Build', sta	SQL Total: SELECT build id AS 'Build', sta	Type: BarChart	Remove
ID: Summary	SQL Query: SELECT status AS 'Status', COU	SQL Total:	Type: PieChart	Remove

Save File

All the database information is stored in `DB.xml` file, by default. This file can be changed from the interface, in the **Paths tab**. You can have multiple configurations and switch between them.

The **field section** contains all the information that was defined in the **Suites tab** for each and every suite, things like: release, build, station, logs, comments, etc.

This information is used when saving the execution results into the database and when sending the report e-mail.

Each field must contain the following tags:

- **ID**: represents the name of the field and MUST be unique;
- **Type**: there are 4 types of fields: **UserSelect**, **DbSelect** (where you must define an SQL query that will generate a list of value in the interface; the user will select 1 value and that will be saved; the difference between them is that DbSelect will never appear in the interface), **UserScript** (when specifying this field, for each Suite defined in the **Suites tab**, the user must provide the path to a script that will run for each file that is inserted in the database. This script can be written in any programming language and all the output printed on the screen *stdout* will be captured and written in the database) and **UserText** (free text, can be any text);
- **SQLQuery**: this is required only for **UserSelect** and **DbSelect** fields. The query must be defined in such a way that the values will be unique (eg: by using SELECT DISTINCT id, name FROM ...) and should select 2 columns. The first column will be the **ID** and second will be the **description** of the respective ID;
- **GUIDefined**: if a field is not GUI defined, it will not appear in the **Suites tab**, when editing suites. DbSelect fields are never visible in the interface;
- **Mandatory**: if a field is mandatory, each suite from the **Suites tab** must have a value for this field. If the user doesn't choose a value, he will not be able to save the profile, or start the execution of the project. Mandatory fields must be GuiDefined;
- **Label**: a short text that describes the field and will appear in the interface; labels are not necessary for DbSelect fields, because they are not visible in the interface.

Examples of fields:

```
<field ID="res_id" Type="DbSelect"
SQLQuery="select MAX(id)+1 from repo_test_view"
Label="-" GUIDefined="false" Mandatory="true" />

<field ID="release_id" Type="UserSelect"
SQLQuery="select DISTINCT id, release_name from t_releases"
GUIDefined="true" Mandatory="true" Label="Release:" />

<field ID="build_id" Type="UserSelect"
SQLQuery="select DISTINCT id, build_name from t_builds"
Label="Build:" GUIDefined="true" Mandatory="true" />

<field ID="comments" Type="UserText" SQLQuery=""
Label="Set comments:" GUIDefined="true" Mandatory="false" />
```

The **insert section** defines a list of SQL queries that will execute every time the execution finishes for ALL the test files. All queries are executed for each and every test file.

The insert queries use the information from the fields described above. A file can only access the fields defined in his parent suite.

Other than that, the queries can access a list of variables passed from the Central Engine, which describe how the execution was completed. Here are the variables:

- **\$twister_user** = the name of the user that ran the tests;
- **\$twister_ce_os** = the operating system of the computer where Central Engine runs;
- **\$twister_ep_os** = the operating system of the computer where Execution Process runs;
- **\$twister_ce_ip** = the IP of the Central Engine;
- **\$twister_ce_hostname** = the host name of the Central Engine;
- **\$twister_ep_ip** = the IP of the Execution Process;
- **\$twister_ep_hostname** = the host name of the Execution Process;
- **\$twister_ce_type** = server type can be *development*, *production*, or *no_type*, as defined in *server_init.ini*.
- **\$twister_server_location** = a description for the current server location, as defined in *server_init.ini*.
- **\$twister_ep_name** = EP name, defined in **Suites tab**;
- **\$twister_rf_fname** = the path to Twister resources file (default is ``resources.json``);
- **\$twister_pf_fname** = the path to Twister project file (default is ``project_users.json``);
- **\$twister_ce_python_revision** = python version from Central Engine;
- **\$twister_ep_python_revision** = python version from Execution Process;
- **\$twister_suite_name** = suite name, defined in **Suites tab**;
- **\$twister_tc_name** = the file name of the current test;
- **\$twister_tc_full_path** = the path + file name of the current test;
- **\$twister_tc_title** = the title, from the **Suites tab**;
- **\$twister_tc_description** = the description, from the **Suites tab**;
- **\$twister_tc_status** = the final status of the test: pass, fail, skip, abort, etc;
- **\$twister_tc_crash_detected** = if the file had a fatal error that prematurely stopped the execution;
- **\$twister_tc_time_elapsed** = time elapsed;
- **\$twister_tc_date_started** = date and time when the running started;
- **\$twister_tc_date_finished** = date and time when the running finished;
- **\$twister_tc_log** = the complete log from execution.

These variables can be used in the query like ``$variable_name``, or ``@dbselect_field_name@``.

Only the fields of type **DbSelect** are surrounded by **@**.

Examples of database inserts:

```
<sql_statement>
INSERT INTO gg_regression
(suite_name, test_name, status, date_start, date_end, build, machine)
VALUES
( '$twister_suite_name', '$twister_tc_name', '$twister_tc_status',
'$twister_tc_date_started', '$twister_tc_date_finished', '$release.$build',
'$twister_ep_name' )
</sql_statement>
```

Or:

```
<sql_statement>
INSERT INTO results_table1
VALUES
( @res_id@, $release_id, $build_id, $suite_id, $station_id,
'$twister_tc_date_finished', '$twister_tc_status', '$comments' )
</sql_statement>
```

★ In this last example, ``res_id`` is a **DbSelect** field with the query defined as:

```
`SELECT MAX(id)+1 FROM results_table1`.
```

The **reports section** defines all the information exposed to the reporting framework.

In this section you can define the *fields*, the *reports* and the *redirects*.

The **fields** must have the following properties:

- **ID**: represents the name of the field and MUST be unique;
- **Type**: there are 2 types of fields: **UserSelect** (where you must define an SQL query) and **UserText** (free text, you can write anything);
- **SQLQuery**: this is required only for UserSelect fields. The query should select two columns: the first is the ID and the second is a name, or a description of the respective ID. If the table where you have the data doesn't have any description associated with the ID, you can use only the ID;
- **Label**: a short text that describes the field, when the user is asked to select a value.

Examples of report fields:

```
<field ID="Dates" Type="UserSelect" Label="Select date:"
SQLQuery="SELECT DISTINCT date FROM results_table1 ORDER BY date" />

<field ID="Statuses" Label="Select test status:" Type="UserSelect"
SQLQuery="SELECT DISTINCT status FROM results_table1 ORDER BY status" />

<field ID="Releases" Label="Select release" Type="UserSelect"
SQLQuery="SELECT DISTINCT SUBSTRING(build, 1, 6) AS R FROM results_table1 ORDER BY R" />

<field ID="Other" Type="UserText" Label="Type other filters:" SQLQuery="" />
```

The **reports** must have the properties:

- **ID**: represents the name of the report and MUST be unique;
- **Type**: there are 4 types of reports: **Table** (an interactive table is generated; the table can be sorted and filtered dynamically), **PieChart**, **BarChart** and **LineChart** (they show both the chart and the table; for PieChart report, the SQL query must be defined in such a way that the first column is a string describing the data, and the second column is an integer or float data; BarChart and LineChart must also have the query generate 2 columns, the first is a number and the second is a label or another number);
- **SQLQuery**: all reports must define an SQL query. If the type of report is Table, it can select any number of fields (although it's recommended to use a maximum of 10, to fit on the screen without having to scroll to the right). If the report is a chart, you must select only 2 columns. The query can use any, or none of the fields described above. Each field name **must be surrounded by `@`**. When a field is used in the query, the reporting framework will require the user to choose a value, before displaying the report.

Examples or reports:

```
<report ID="Details (build)" Type="Table"
SQLQuery="SELECT * FROM results_table1 WHERE build='@Build@' ORDER BY id" />

<report ID="Details (suite)" Type="Table"
SQLQuery="SELECT * FROM results_table1 WHERE build='@Build@' AND suite_name='@Suite@' " />

<report ID="Summary" Type="PieChart"
SQLQuery="SELECT status AS 'Status', COUNT(status) AS 'Count' FROM results_table1 WHERE build=
'@Build@' group by status " />

<report ID="Pass Rate" Type="LineChart"
SQLQuery="SELECT Build, COUNT(status) AS 'Pass Rate (%)' FROM results_table1 WHERE Build LIKE
'@Release@%' AND status='Pass' GROUP BY Build"
SQLTotal="SELECT Build, COUNT(status) AS 'Pass Rate (%)' FROM results_table1 WHERE Build LIKE
'@Release@%' GROUP BY Build" />
```

The **redirects** must have the properties:

- **ID**: represents the name of the redirect and MUST be unique. Ideally, the ID should start with the word ``goto``;
- **Path**: is the full path to a HTML page. It can be a link to a static page, to PhpMyAdmin for the current database, or a user web page served by any web server.

Examples of redirects:

```
<redirect ID="goto PhpMyAdmin" Path="http://my-server/phpmyadmin" />

<redirect ID="goto PHP Report" Path="http://my-server/some-report.php" />
```

10.4 - Config the devices (testbed)

The screenshot shows a web interface for configuring testbeds. On the left, there is a list of testbeds: 'tb3', 'tb2', and 'tb1'. The 'tb1' entry is selected and highlighted in blue. Below this list are two buttons: 'Add Component' and 'Remove'. On the right, there is a form for configuring the selected testbed. The 'Run on EP:' field is a dropdown menu with 'EP-1001' selected, and other options are 'EP-1002', 'EP-1003', and 'EP-1004'. Below this are three text input fields: 'Name:' with 'tb1', 'ID:' with 'f119f3cf8f', and 'Path:' with 'tb1'. At the bottom right of the form is a button labeled 'Add'.

The Resource Allocator server is used to view and edit the Testbed and SUT properties.

The testbed is global for all users.

Each device == node == resource must have a name and some properties in the form of **{key: value}**.

The name of a resource must be unique in its parent. For example you cannot have more nodes called `Device1` in parent `Testbed1`, but you can have nodes called `Device1` for both `Testbed1` and `Testbed2`.

This is important, because each resource can be accessed using its ID, or its full path (just like a Unix file system).

The Resource Allocator server exposes a simple API inside the Twister tests, for accessing the resources:

- **getResource**(ID or full path) - returns a dictionary containing all the node properties;
- **setResource**(name, parent ID or full path, properties in dictionary or JSON string)

- This function is used to CREATE and MODIFY nodes. If the resource is created, the ID of the new resource is returned. If the resource is updated, the function returns True.

Example: **setResource**('module1', '/tb1/device2', '{"ip":"10.0.0.1", "port":"80"}');

- **renameResource**(ID or full path, new name) - renames resources or their properties;
- **deleteResource**(ID or full path) - deletes resources or their properties;
- **getResourceStatus**(ID or full path) - obsolete.

Examples:

Let's say there are 3 testbeds: *tb1*, *tb2*, *tb3*. Each testbed has 2 devices: *dev1* and *dev2*. Each device has 3 modules: *mod1*, *mod2*, *mod3*.


To access module 2 from device 1 from testbed 3, you can use: **getResource**(' /tb3/dev1/mod2').

To access testbed 1, you can use: **getResource**(' /tb1').

To rename device 2 from testbed 2, you can use: **renResource**(' /tb2/dev2', 'dev_x2'). Note that the new name is just a string, not the full path.

In **production mode**, to be able to Set, Rename or Delete a resource, a user must have the *CHANGE_TESTBED* role.

10.4 - Config the SUTs

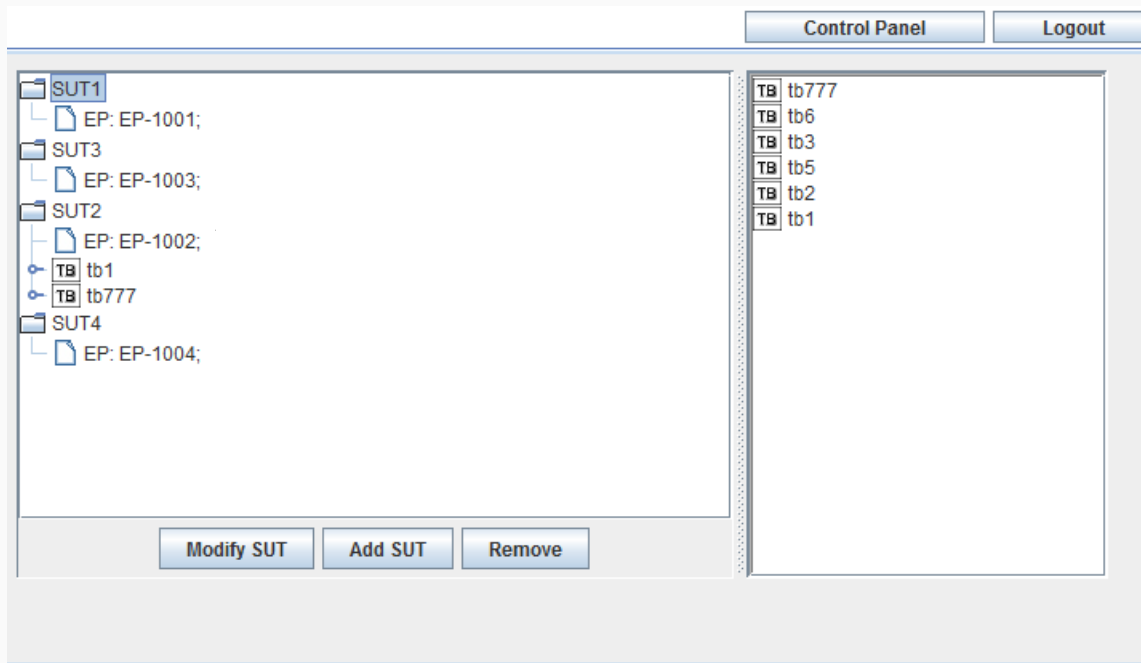

This is where you can edit the SUTs (systems under test). A SUT is a collection of TestBeds or devices, linked together in a system that will be tested as a whole.

The SUT is global for all users.

In order to create a SUT, press on `Add SUT` button in the applet. You will be asked to type a name and select an execution process for the SUT. The name MUST be unique; you cannot have more SUTs with the same name. After the SUT is create, to add TestBeds or devices drag & drop resources from the TestBeds tree in the right. You can rename a SUT by selecting it and using the `Modify SUT` button and you can delete it with `Remove`.

The Resource Allocator server exposes a simple API inside the Twister tests, for accessing the SUTs:

- **getSut**(ID or full path) - returns a dictionary containing all the SUT properties;

- When you use the getSut function, for example getSut('SUT1'), you will receive a hash-map like this:

```
{'path': 'SUT1', 'meta': {'epnames': 'EP-1001'}, 'id': 'a322908eab', 'children': ['5cae3abaef', 'c76db917e6']}
```

Each child is the ID of a node from the SUT, and the node name is an ID of a TestBed or device.

Use getSut of the child ID, to see the ID of a TestBed or device, in the path of the SUT.

```
getSut('5cae3abaef') # {'path': 'SUT1/f119f3cf8f', 'meta': {}, 'id': '5cae3abaef', 'children': []}
getSut('c76db917e6') # {'path': 'SUT1/f7a32d31cf', 'meta': {}, 'id': 'c76db917e6', 'children': []}
getResource('f119f3cf8f') # {'path': 'tb1', 'meta': {}, 'id': 'f119f3cf8f', 'children': ['6f1bf6a142']}
getResource('f7a32d31cf') # {'path': 'tb2/device1', 'meta': {}, 'id': 'f7a32d31cf', 'children': []}
```

- **setSut**(name, parent ID or full path, properties in dictionary or JSON string)


- This function is used to CREATE and MODIFY SUTs. If the SUT did not exist before, the ID of the new SUT is returned. If the SUT is updated, the function returns True.

Example: `setSut('SUT11', '/', '{"epnames": "EP-1001;EP-1002"}')`;

- **renameSut**(ID or full path, new name) - renames SUTs or their properties;
- **deleteSut**(ID or full path) - deletes SUTs or their properties.

In **production mode**, to be able to Set, Rename or Delete a SUT, a user must have the *CHANGE_TESTBED* role.

10.5 - Config the global parameters

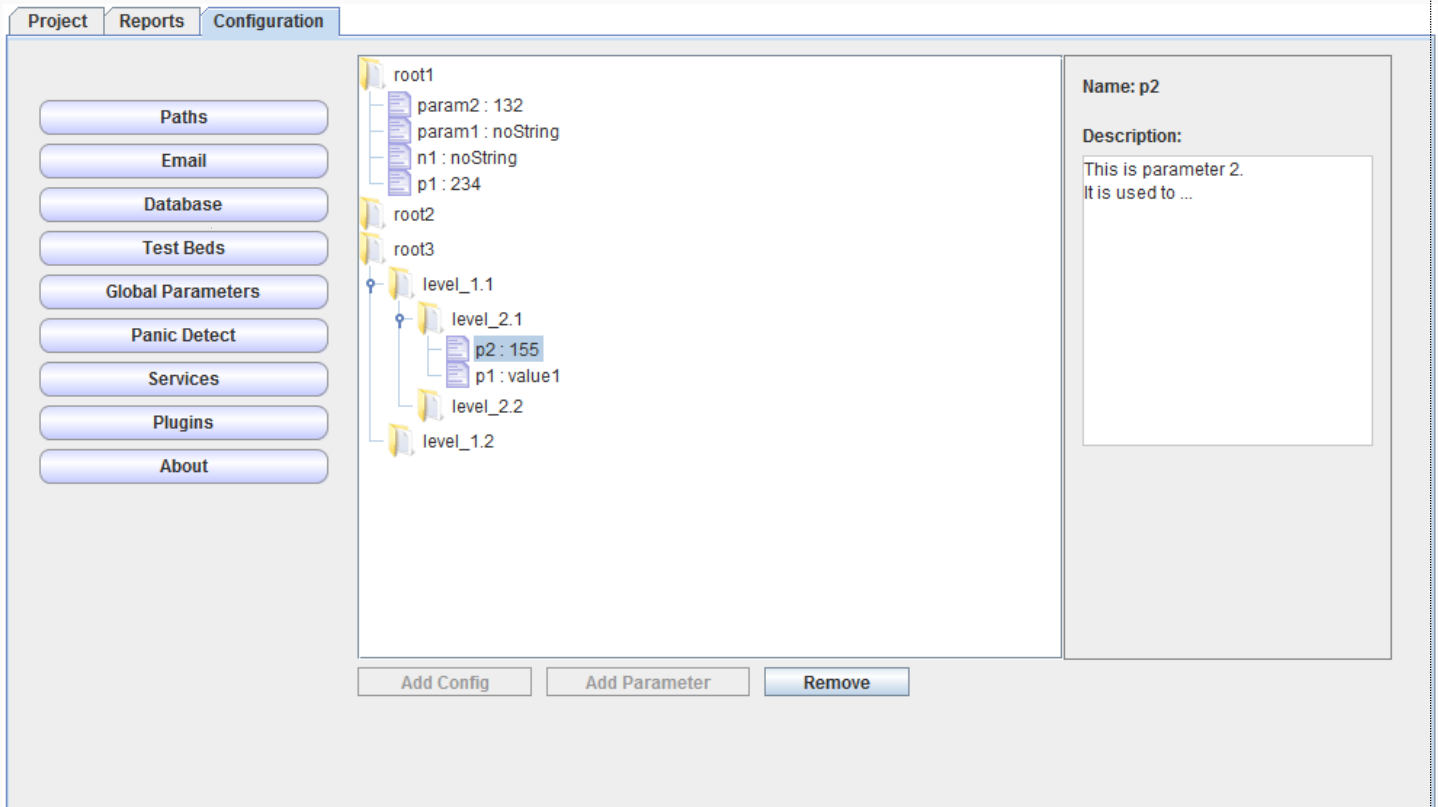

Global parameters are variables available in all test files. There is no need to import any library.

The parameters are stored per user!

The API is very simple: in any test, use **getGlobal**(name) and **setGlobal**(name, value). You don't need to import anything.

If the **name** is a folder (not a variable with a value), instead of a value, **getGlobal** returns a dictionary. If the parameter **name** doesn't exist, **getGlobal** returns *False*.

The **setGlobal** function will update, create or delete parameters. If the name exists, it is updated. If it doesn't exist, it is created. If you use **setGlobal** (name, False), the parameter is deleted.

The changes made by **setGlobal** are temporary and will RESET every time the tests start running.

There are 3 types of parameters:

1. the default parameters stored in the configuration, that are saved in globals.xml file ;
2. the serializable parameters saved by the test files are shared between all Eps from a user ;
3. the complex, not serializable parameters are stored on the EP that is running the tests.

10.6 - Config `panic detect`

Project

Reports

Configuration

Paths

Email

Database

Test Beds

Global Parameters

Panic Detect

Services

Plugins

RegEx: CORE-DUMP

☒ Enabled

Remove

RegEx: has CRASHED

☒ Enabled

Remove

RegEx: CRITICAL ERROR

☐ Enabled

Remove

Add

Panic detect is a mechanism that allows the users to add `expressions` that will be searched in the test logs. If any of the expressions is detected, the execution STOPS.

An *expression* can be a normal string, or a regex.

This is useful to check for core dumps and critical errors; in these extreme cases, it's useless to continue the execution of any test.

10.7 - Services and Plug-ins

Print screen with Services (in production mode, using Services requires the *CHANGE_SERVICES* role)

ProjectReportsConfiguration

Paths

Email

Database

Test Beds

Global Parameters

Panic Detect

Services

Plugins

ofcontroller 1

Openflow controller 1

stopped

Start

Stop

Configuration

ofcontroller 2

Openflow controller 2

stopped

Start

Stop

Configuration

ofcontroller 3

Openflow controller 3

stopped

Start

Stop

Configuration

Scheduler

Scheduler Server

stopped

Start

Stop

Configuration

Print screen with Plug-ins (in production mode, using Plug-ins requires the *CHANGE_PLUGINS* role)

ProjectReportsConfiguration

Paths

Email

Database

Test Beds

Global Parameters

Panic Detect

Services

Plugins

Local

Local installed plugins

ServiceManagement.jar

Remove

UserName.jar

Remove

Scheduler.jar

Remove

Remote

Remote plugins found on server

PacketsTwistPlugin.jar

Download

GITPlugin.jar

Download

JiraPlugin.jar

Download

SVNPlugin.jar

Download

JenkinsPlugin.jar

Download

☐ Activate

Scheduler.jar

Scheduler

Read more

☐ Activate

ServiceManagement.jar

ServiceManagement plugin

Read more

☐ Activate

UserName.jar

Plugin to display user name

Read more

More about this in the **`Twister Libraries, Plugins, Services`** help file.

10.8 – Changing users

Print screen with Users Management

Users

User Name	Timeout	User Groups	User Roles
tscguest	01	admin	CHANGE_DB_CFG,CHANGE_EML_CFG,CHANGE_FWM_CFG,CHANGE_GLOBALS,CHANGE_PLUGINS,CHANGE_PROJECT,CHANGE_...
nisuser	00	developer,admin	CHANGE_DB_CFG,CHANGE_EML_CFG,CHANGE_FWM_CFG,CHANGE_GLOBALS,CHANGE_PLUGINS,CHANGE_PROJECT,CHANGE_...
admin	01	admin,user	CHANGE_DB_CFG,CHANGE_EML_CFG,CHANGE_FWM_CFG,CHANGE_GLOBALS,CHANGE_PLUGINS,CHANGE_PROJECT,CHANGE_...
developer	01	developer	CHANGE_DB_CFG,CHANGE_FWM_CFG,CHANGE_GLOBALS,CHANGE_PROJECT,CREATE_PROJECT,DELETE_PROJECT,EDIT_TC,R...
bogdan	10	admin	CHANGE_DB_CFG,CHANGE_EML_CFG,CHANGE_FWM_CFG,CHANGE_GLOBALS,CHANGE_PLUGINS,CHANGE_PROJECT,CHANGE_...
user	01	user	CHANGE_SERVICES,CHANGE_TESTBED,CREATE_PROJECT
croq	01	admin	CHANGE_DB_CFG,CHANGE_EML_CFG,CHANGE_FWM_CFG,CHANGE_GLOBALS,CHANGE_PLUGINS,CHANGE_PROJECT,CHANGE_...

Add User

Remove User

User properties

User name: user

Timeout: 01

Groups

tester
developer
admin
guest
user

Groups

Group Name	Group Roles
tester	CHANGE_DB_CFG,RUN_TESTS
developer	CHANGE_FWM_CFG,CHANGE_GLOBALS,CHANGE_DB_CFG,RUN_TESTS,EDIT_TC,CREATE_PROJECT,...
admin	CHANGE_DB_CFG,CHANGE_EML_CFG,CHANGE_FWM_CFG,CHANGE_GLOBALS,CHANGE_PLUGINS,C...
guest	
user	CREATE_PROJECT,CHANGE_SERVICES,CHANGE_TESTBED

Edit Group Roles

Control Panel

Since *version 2.020*, every user that connects to the Central Engine must be registered in Twister, must be part of a group, and implicitly has a set of roles.

When installing **Twister Server** for the first time, you must go in the server install folder and edit the ``config/users_and_groups.ini`` file. In the section `[users]`, the first user by default is `[[admin]]`; this name must be replaced with **your system user**. This way, you will become a Twister Administrator and will be able to create, edit, or delete other Twister users.

This manual edit must be done by the administrator only the first time, the rest of the users should be changed using the GUI (the applet). You should also make sure that no one can view the `users_and_groups` file except for the ROOT user and make sure that Central Engine runs as ROOT, so it will be able to read the file (or if you plan to update the users using the GUI, Central Engine must also be able to write).

The roles are enabled only when the server type is ``production``, in the file ``config/server_init.ini``. If the server type is ``development``, users have all the roles, except for `CHANGE_USERS`.

If a user cannot be found in `users_and_groups` file, **he CANNOT** use Twister.

In `users_and_groups.ini` file, a Twister user has a title (his own name) and 3 fields:

- **groups** (a list of groups that this user belongs to. The groups will give him a set of Roles. The group can be 0 zero, which means zero Roles);
- **timeout** (the amount of seconds until the applet automatically logs out the user);
- a unique **key** (used to encrypt the passwords from DB.xml and EMAIL.xml. The passwords from the files cannot be decrypted without the key; **it's important that only the ROOT can view the settings and see the user keys**).

The timeout and key are very important in any server mode (development or production).

The groups have a set of unique roles. This is the complete list:

- RUN_TESTS - Can run tests (server + applet)
- EDIT_TC - Can edit test files (applet)
- CREATE_PROJECT - Can create new projects (applet)
- CHANGE_PROJECT - Can change defined projects (applet)
- DELETE_PROJECT - Can delete projects (applet)
- VIEW_REPORTS - Can open the reports (server + applet)
- CHANGE_FWM_CFG - Can change his main config (applet)
- CHANGE_GLOBALS - Can change global parameters (applet)
- CHANGE_DB_CFG - Can change database config (applet)
- CHANGE_EML_CFG - Can change e-mail config (applet)
- CHANGE_PLUGINS - Can load/ unload plugins (applet)
- CHANGE_TESTBED - Can change the global testbed (server + applet)
- CHANGE_SERVICES - Can start/ stop services (server + applet)
- CHANGE_USERS - Can create, change and delete users (server + applet)

How to write Twister tests

Twister framework can run **Python**, **TCL** and **Perl** (limited) tests.

Writing a **Twister test** is just like writing a normal Python 2.7 test, or TCL 8.5 test, or Perl test, with only one exception.

A Twister Python test can run with Python and with Twister **ONLY IF** the test doesn't use Twister helper variables and functions, which are not available in the usual Python environment. So **if the a script uses the helper variables and functions**, the script will become incompatible with the original Python/ TCL/ Perl language and will be executed only from Twister.

Twister helper variables inserted in all tests:

- **USER** : the username running the current test ;
- **PWD** : the system password for the user running this test ;
- **EP** : the name of the Execution Process running the current test ;
- **SUITE_NAME** : the name of the suite that contains the current test ;
- **FILE_NAME** : the full path of the test file from the machine that runs the Central Engine ;
- **currentTB** : the current test bed ;
- **PROXY** : this is a pointer to the Central Engine XML-RPC server. It is used for development.

Twister helper functions:

- **logMsg**(logType, message) : this function sends a message in a special log and will not appear in the CLI. Valid log types are : *logRunning*, *logDebug* and *logTest*. It is used for sending debug messages from the tests.
- **getGlobal**(path) : get a global parameter;
- **setGlobal**(path, new_value) : set a global parameter;
- **getResource**(ID or full path) : get a resource;
- **setResource**(ID or full path, new name) : create, or update a resource;
- **renameResource**(ID or full path, new name) : rename one resource or property of a resource;
- **deleteResource**(ID or full path) : delete one resource or property of a resource;
- **getSut**(ID or full path) : get a SUT properties;
- **setSut**(ID or full path, new name) : create, or update a SUT;
- **renameSut**(ID or full path, new name) : rename one SUT or property of a SUT;
- **deleteSut**(ID or full path) : delete one SUT or property of a SUT;
- **getResourceStatus**(ID or full path) : get the status of a resource: free, busy, or reserved;
- **reserveResource**(ID or full path) : reserve one resource;
- **py_exec** *some_python_command* : this function works **only in TCL** tests and allows running Python commands, or calling functions and objects from global parameters, defined in the previous tests.

In order to access the parameters sent from the interface, a Python test can use ``import sys ; sys.argv``. The parameters are passed as a list and can be accessed using usual python variable arguments mechanism (using `sys.argv`).

To access a property called ``var1``, a Python test can use the following syntax (it returns the value of property):

```
PROPERTIES['var1']
```

The properties: ``type``, ``suite``, ``file``, ``config_files``, ``dependency``, ``status``, ``Runnable``, ``Optional``, ``setup_file``, ``teardown_file`` and ``param`` are reserved for internal use and must NOT be used.

11 – Performance and troubleshooting

The Central Engine and the Reporting Server are instances of Python CherryPy and were tested with 750+ simultaneous connections, without crashing, or losing connection.

★An article concerning python web servers: <http://nichol.as/benchmark-of-python-web-servers>.

Even if the Central Engine is fast enough, for a smooth experience, it's not recommended to run more than 100 Execution Processes on one Central Engine instance. If you need more, you can simply open another instance of CE, on a different port and connect the rest of the clients on the new one.

The Execution Processes should be running on different workstations and their performance depends on the hardware of the respective machine.

All services have logs that describe every operation that is being executed. If something fails, it will be easy to know where exactly the error was produced.

On the server side, you can check the logs from `/opt/twister/server_log.log`, or `/opt/twister/logs/` folder.

On the client side, you can check the logs from `/$USER_HOME/twister/.twister_cache/`. Every EP has its own log.

If you notice a crash, or wish to report a bug, you can use the ``create_bug_report.py`` script from twister repo folder.