

Feature	Feature		Scenario				Step			
Name	Duration	T	P	F	S	T	P	F	S	
Login to HRM Application	12.581 s	1	0	1	0	3	0	0	3	

FAIL & SKIP SCENARIOS -- 3 --

#	Feature Name	Scenario Name
1	Login to HRM Application	Login with valid credentials


TAG		Scer	nario Feature				ture		
Name	T	P	F	S	T	P	F	S	
@ValidCredentials	1	0	1	0	1	0	1	0	
@LoginPageTest	1	0	1	0	1	0	1	0	

FEATURES SUMMARY -- 5 --



#	Feature Name	T	P	F	S	Duration
1	Login to HRM Application	1	0	1	0	12.581 s

SCENARIOS SUMMARY -- 6 --

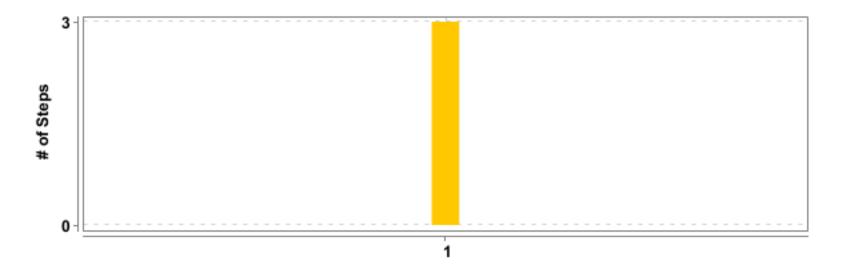


#	Feature Name	Scenario Name	T	P	F	S	Duration
1	Login to HRM Application	Login with valid credentials	3	0	0	3	12.561 s

DETAILED SECTION -- 7 --

Login to HRM Application

FAILED	DURATION - 12.581 s	Scenarios		Steps	
		Total - 1		Total - 3	
/ 11:08:17.883 AM //	/ 11:08:30.464 AM /	Pass - 0	1	Pass - 0	3
		Fail - 1		Fail - 0	
		Skip - 0		Skip - 3	

Login with valid credentials

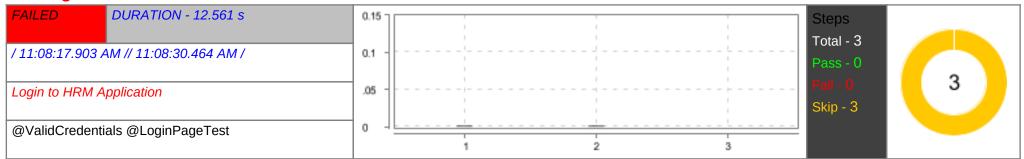

#	Step / Hook Details	Status	Duration
	BEFORE - definitions.Hooks.setUp()	FAILED	12.494 s
	org.openqa.selenium.SessionNotCreatedException: Could not start a new session. Response code 500. Message: Process unexpectedly closed with status 0 Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'HASSEN-HP', ip: '192.168.209.1', os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.6' Driver info: org.openqa.selenium.firefox.FirefoxDriver Command: [null, newSession {capabilities=[Capabilities {acceptInsecureCerts: true, browserName: firefox, moz:debuggerAddress: true, moz:firefoxOptions: {}}}, desiredCapabilities=Capabilities {acceptInsecureCerts: true, browserName: firefox, moz:debuggerAddress: true, moz:firefoxOptions: {}}}} at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:144) at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:102) at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:67) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:156) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:142)		12.4343
	at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569) at org.openqa.selenium.remote.RemoteWebDriver.startSession(RemoteWebDriver.java:264)		
	at org.openqa.selenium.remote.RemoteWebDriver. <init>(RemoteWebDriver.java:179) at org.openqa.selenium.firefox.FirefoxDriver.<init>(FirefoxDriver.java:110) at org.openqa.selenium.firefox.FirefoxDriver.<init>(FirefoxDriver.java:98) at org.openqa.selenium.firefox.FirefoxDriver.<init>(FirefoxDriver.java:94)</init></init></init></init>		

DETAILED SECTION -- 8 --

#	Step / Hook Details	Status	Duration
	at utils.HelperClass. <init>(HelperClass.java:21) at utils.HelperClass.setUpDriver(HelperClass.java:37) at definitions.Hooks.setUp(Hooks.java:17)</init>		
1	Given User is on HRMLogin page "https://opensource-demo.orangehrmlive.com/"	SKIPPED	0.001 s
2	When User enters username as "Admin" and password as "admin123"	SKIPPED	0.001 s
3	Then User should be able to login sucessfully and new page open	SKIPPED	0.000 s
	AFTER - definitions.Hooks.tearDown(io.cucumber.java.Scenario)	FAILED	0.021 s
	java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "utils.HelperClass.getDriver()" is null at utils.ScreenshotUtils.getBase64Screenshot(ScreenshotUtils.java:15) at definitions.Hooks.tearDown(Hooks.java:24)		