



- Ⓐ Train the baseline models on X_{train} , freeze them and evaluate on X_{test}



X_{test}

evaluate

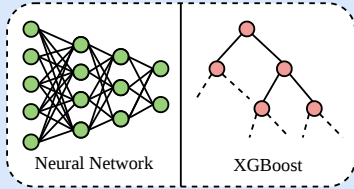

Baseline models


1

- Ⓑ Action space over N retained APs

$$\mathcal{A}_k = \binom{N}{k}$$

N : number of retained APs (21, 23, 53, or 120)

k : APs chosen per action (attack size), $1 \leq k \leq N$



2

- Ⓒ Search strategies for subset identification

Brute Force
(ground truth)

Random Sampling

Simulated Annealing

RSSI-Proximity

Genetic Algorithm

3

- Ⓔ Evaluation


$$\text{RMSE}(\hat{\mathbf{y}}'_{\text{test}}, \mathbf{y}_{\text{test}}) = \sqrt{\frac{1}{n_{\text{test}}} \sum_{i=1}^{n_{\text{test}}} \|\hat{\mathbf{y}}'_{\text{test},i} - \mathbf{y}_{\text{test},i}\|^2}$$

$\hat{\mathbf{y}}'_{\text{test}}$: predictions on attacked inputs X'_{test} ,

$\mathbf{y}_{\text{test}}$: ground truth

4

- Ⓓ Apply noise η to the APs in selected subset S and evaluate the baseline model on the attacked data X'_{test}



X'_{test}

$$X'_{\text{test}}(:, j) = \begin{cases} X_{\text{test}}(:, j) + \eta, & \text{if } j \in S, \\ X_{\text{test}}(:, j), & \text{if } j \notin S. \end{cases}$$