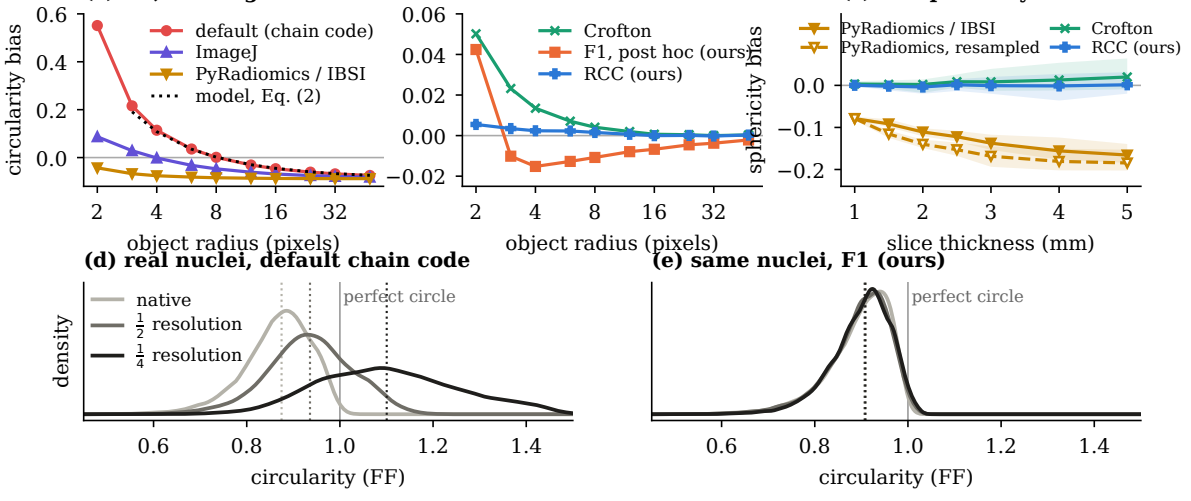
(a) 2D, existing tools
circularity bias
default (chain code)
ImageJ
PyRadiomics / IBSI
model, Eq. (2)
object radius (pixels)
(b) 2D, corrections (8× zoom)
Crofton
F1, post hoc (ours)
RCC (ours)
object radius (pixels)
(c) 3D sphericity
sphericity bias
PyRadiomics / IBSI
PyRadiomics, resampled
Crofton
RCC (ours)
slice thickness (mm)
(d) real nuclei, default chain code
density
native
1/2 resolution
1/4 resolution
perfect circle
circularity (FF)
(e) same nuclei, F1 (ours)
perfect circle
circularity (FF)