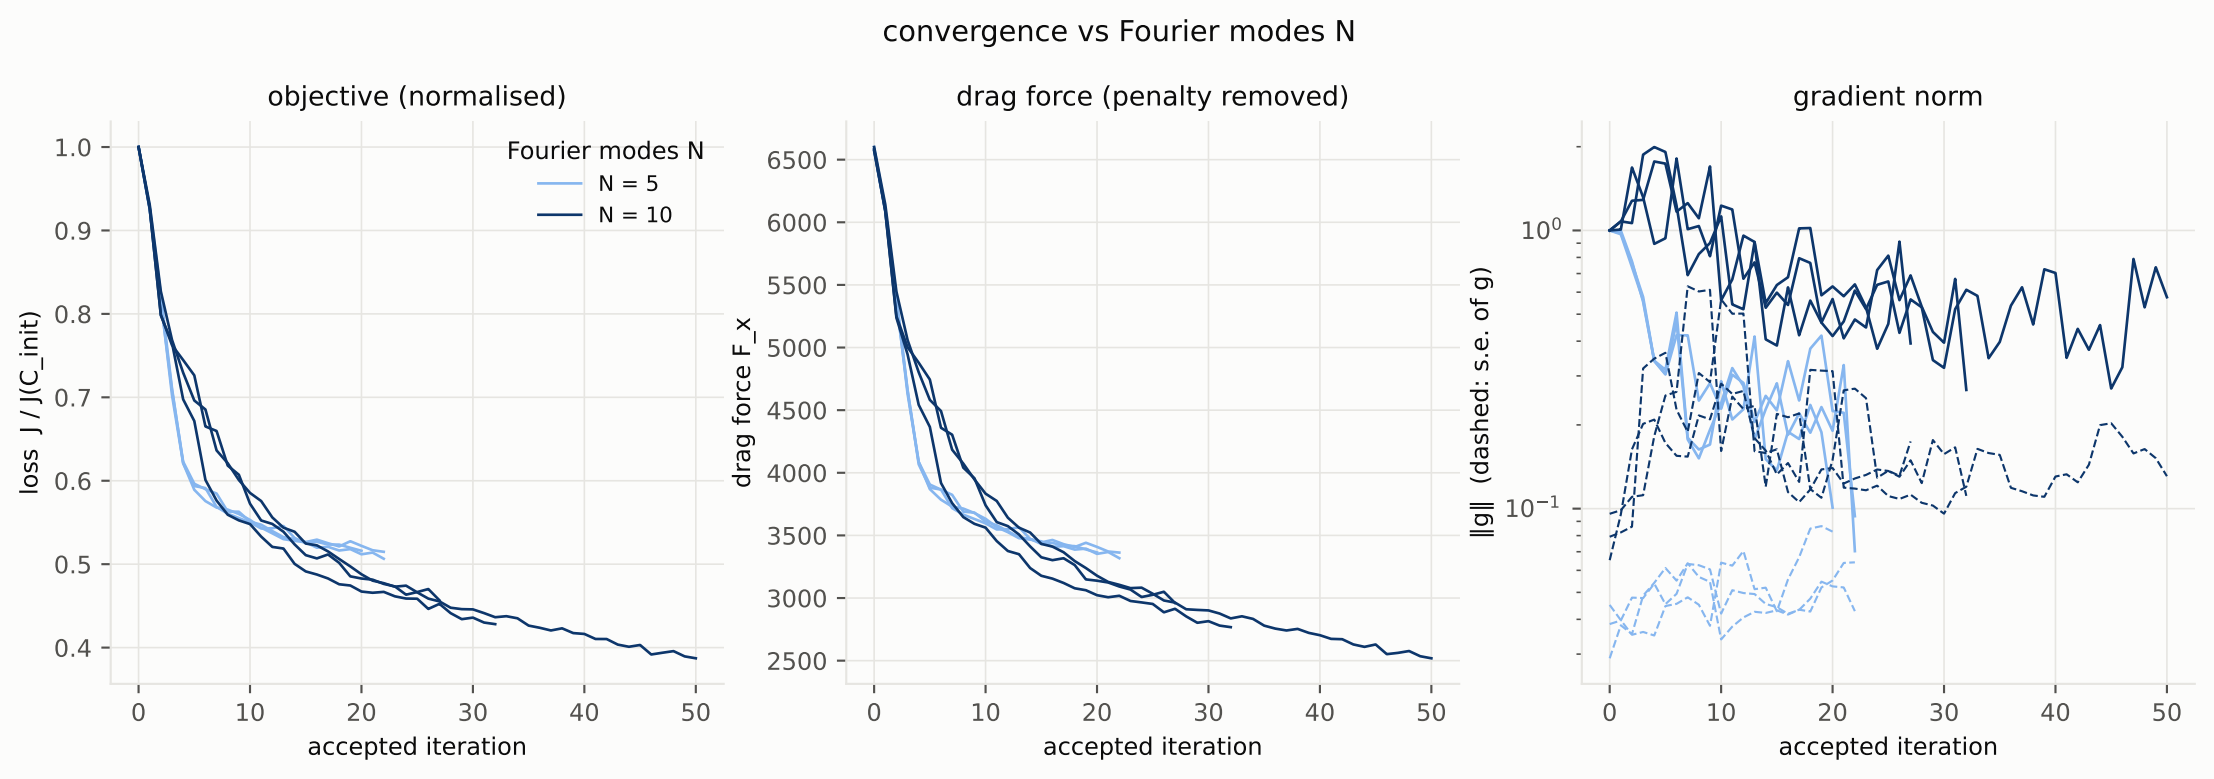
convergence vs Fourier modes N
objective (normalised)
drag force (penalty removed)
gradient norm
loss J / J(C_init)
drag force F_x
‖g‖ (dashed: s.e. of g)
accepted iteration
accepted iteration
accepted iteration
Fourier modes N
N = 5
N = 10
1.0
0.9
0.8
0.7
0.6
0.5
0.4
6500
6000
5500
5000
4500
4000
3500
3000
2500
10^{0}
10^{-1}
0
10
20
30
40
50