

PSCalendar Manual v2.11.0



<https://github.com/jdhitsolutions/PSCalendar>

Table of Contents

Introduction	1
PSCalendar Overview.....	2
Installation.....	3
Module Commands	4
Get-PSCalendar	4
Show-PSCalendar	8
Show-GuiCalendar	9
Get-NCalendar	11
Get-MonthName	11
Highlight Dates with Notes	13
Customizing the Calendar Appearance.....	14
ANSI Support.....	16
A Note on Culture	17
Integrating with PSReminderLite.....	18
Related Modules.....	21
Potential Issues.....	22
Module Commands	23
Export-PSCalendarConfiguration.....	24
Synopsis	24
Syntax	24
Description.....	24
Examples	24
Parameters.....	24
Inputs	25
Outputs.....	25
Notes.....	25
Related Links	26
Get-PSCalendar.....	27
Synopsis	27
Syntax	27
Description.....	27
Examples	28
Parameters.....	30
Inputs	33
Outputs.....	33
Notes.....	34
Related Links	34
Get-MonthName.....	35
Synopsis	35
Syntax	35
Description.....	35

Examples	35
Parameters.....	36
Inputs	36
Outputs.....	36
Notes.....	36
Related Links	36
Get-NCalendar.....	37
Synopsis	37
Syntax	37
Description.....	37
Examples	37
Parameters.....	38
Inputs	40
Outputs.....	40
Notes.....	40
Related Links	40
Get-PSCalendarConfiguration	41
Synopsis	41
Syntax	41
Description.....	41
Examples	41
Parameters.....	41
Inputs	41
Outputs.....	42
Notes.....	42
Related Links	42
Set-PSCalendarConfiguration.....	43
Synopsis	43
Syntax	43
Description.....	43
Examples	43
Parameters.....	43
Inputs	46
Outputs.....	46
Notes.....	46
Related Links	46
Show-PSCalendar	47
Synopsis	47
Syntax	47
Description.....	47
Examples	47
Parameters.....	49
Inputs	51

Outputs.	51
Notes.	51
Related Links	52
Show-GuiCalendar	53
Synopsis	53
Syntax	53
Description.	53
Examples	53
Parameters.	54
Inputs	57
Outputs.	57
Notes.	57
Related Links	58
Show-PSCalendarHelp	59
Synopsis	59
Syntax	59
Description.	59
Examples	59
Parameters.	59
Inputs	60
Outputs.	60
Notes.	60
Related Links	60

Introduction

This manual is a PDF version of several module-related reference files as well as all of the command help. The goal is to provide a single source for all module documentation. Be aware that many of the source files contain internal cross-references. Best efforts have been made to port those links to this document. External links should work as expected.

If you need to ask a question or report a problem, please visit the module's [Github repository](#).

PSCalendar Overview

Installation

You can install this module from the PowerShell Gallery.

```
Install-PSResource PSCalendar
```

Installing this module will also install the `Microsoft.PowerShell.ThreadJob` module from the PowerShell Gallery, as that is module dependency if you want to use `Show-GuiCalendar`. If you have the legacy `ThreadJob` module installed, you might get a warning if you install this module with `Install-Module`. If you do, run `Install-Module PSCalendar -AllowClobber`. You shouldn't see this error if you install using `Install-PSResource`.

The commands in this module have been tested on PowerShell 7 both under Windows and Linux and there is no reason these commands should not work. Commands and aliases that are incompatible with non-Windows platforms will be handled on a per command basis.

After installing the module, you can view a local PDF version of this file by running `Show-PSCalendarHelp`.

Note: If you are upgrading to v2.0.0 or later of this module, and have older versions installed, it is recommended that you uninstall the older versions.

Module Commands

Name	Alias	Synopsis
Export-PSCalendarConfiguration	<i>Save-PSCalendarConfiguration</i>	Save the current calendar configuration settings to a file.
Get-PSCalendar	<i>cal, Get-Calendar</i>	Displays a visual representation of a calendar.
Get-MonthName	<i>mon</i>	Get the list of month names.
Get-NCalendar	<i>ncal</i>	Display a Linux-style ncal calendar.
Get-PSCalendarConfiguration		Get the current PSCalendar ANSI configuration.
Set-PSCalendarConfiguration		Modify the PSCalendar ANSI configuration.
Show-PSCalendar	<i>scal, Show-Calendar</i>	Display a colorized calendar month in the console.
Show-GuiCalendar	<i>gcal</i>	Display a WPF-based calendar.
Show-PSCalendarHelp		Display a help PDF file for the PSCalendar module.

Here are a few details are the commands you are most likely to use. in v2.11.0 `Get-Calendar` and `Show-PSCalendar` have been renamed to `Get-PSCalendar` and `Show-PSCalendar`. The old names are now **aliases** for the new commands. This was done to make the command names more consistent with this module. This change shouldn't break any existing scripts or commands that use the old names.

Note that not all screen shots have been updated to reflect the latest version of the module.

[Get-PSCalendar](#)

The commands in this module have been updated to take advantage ANSI escape sequences. The main function, [Get-PSCalendar](#), will display the current month in the console, highlighting the current date with an ANSI escape sequence. By default, weekend days are also highlighted.

```

PS C:\> Get-Calendar

      August 2025

Sun  Mon  Tue  Wed  Thu  Fri  Sat
 27   28   29   30   31    1    2
  3    4    5    6    7    8    9
 10   11   12   13   14   15   16
 17   18   19   20   21   22   23
 24   25   26   27   28   29   30
 31    1    2    3    4    5    6
PS C:\>

```

But you can also specify a calendar by month and year.

```
PS C:\> Get-Calendar -Month December -Year 2025 -HighLightDate 12/25/25,12/24/25,12/31/25
```

December 2025

<u>Sun</u>	<u>Mon</u>	<u>Tue</u>	<u>Wed</u>	<u>Thu</u>	<u>Fri</u>	<u>Sat</u>
30	1	2	3	4	5	6
7	8	9	10	11	12	13
14	15	16	17	18	19	20
21	22	23	24	25	26	27
28	29	30	31	1	2	3

In this example you can see that I specified dates to highlight. Or you can specify a range of months.

```
PS C:\> Get-Calendar -start 1/1/2025 -end 3/1/2025
```

January 2025

<u>Sun</u>	<u>Mon</u>	<u>Tue</u>	<u>Wed</u>	<u>Thu</u>	<u>Fri</u>	<u>Sat</u>
29	30	31	1	2	3	4
5	6	7	8	9	10	11
12	13	14	15	16	17	18
19	20	21	22	23	24	25
26	27	28	29	30	31	1

February 2025

<u>Sun</u>	<u>Mon</u>	<u>Tue</u>	<u>Wed</u>	<u>Thu</u>	<u>Fri</u>	<u>Sat</u>
26	27	28	29	30	31	1
2	3	4	5	6	7	8
9	10	11	12	13	14	15
16	17	18	19	20	21	22
23	24	25	26	27	28	1

March 2025

<u>Sun</u>	<u>Mon</u>	<u>Tue</u>	<u>Wed</u>	<u>Thu</u>	<u>Fri</u>	<u>Sat</u>
23	24	25	26	27	28	1
2	3	4	5	6	7	8
9	10	11	12	13	14	15
16	17	18	19	20	21	22
23	24	25	26	27	28	29
30	31	1	2	3	4	5

```
PS C:\>
```

In v2.10.0 you can now specify a range of months by calendar quarter. The default is the current year.


```
PS C:\> Get-Calendar -Quarter 3

      July 2025
  Sun Mon Tue Wed Thu Fri Sat
  ---
  29  30   1   2   3   4   5
   6   7   8   9  10  11  12
  13  14  15  16  17  18  19
  20  21  22  23  24  25  26
  27  28  29  30  31   1   2

      August 2025
  Sun Mon Tue Wed Thu Fri Sat
  ---
  27  28  29  30  31   1   2
   3   4   5   6   7   8   9
  10  11  12  13  14  15  16
  17  18  19  20  21  22  23
  24  25  26  27  28  29  30
  31   1   2   3   4   5   6

      September 2025
  Sun Mon Tue Wed Thu Fri Sat
  ---
  31   1   2   3   4   5   6
   7   8   9  10  11  12  13
  14  15  16  17  18  19  20
  21  22  23  24  25  26  27
  28  29  30   1   2   3   4
```

The function should be culturally aware. The commands in this module that have a `-Month` parameter should autocomplete to culture-specific month names.

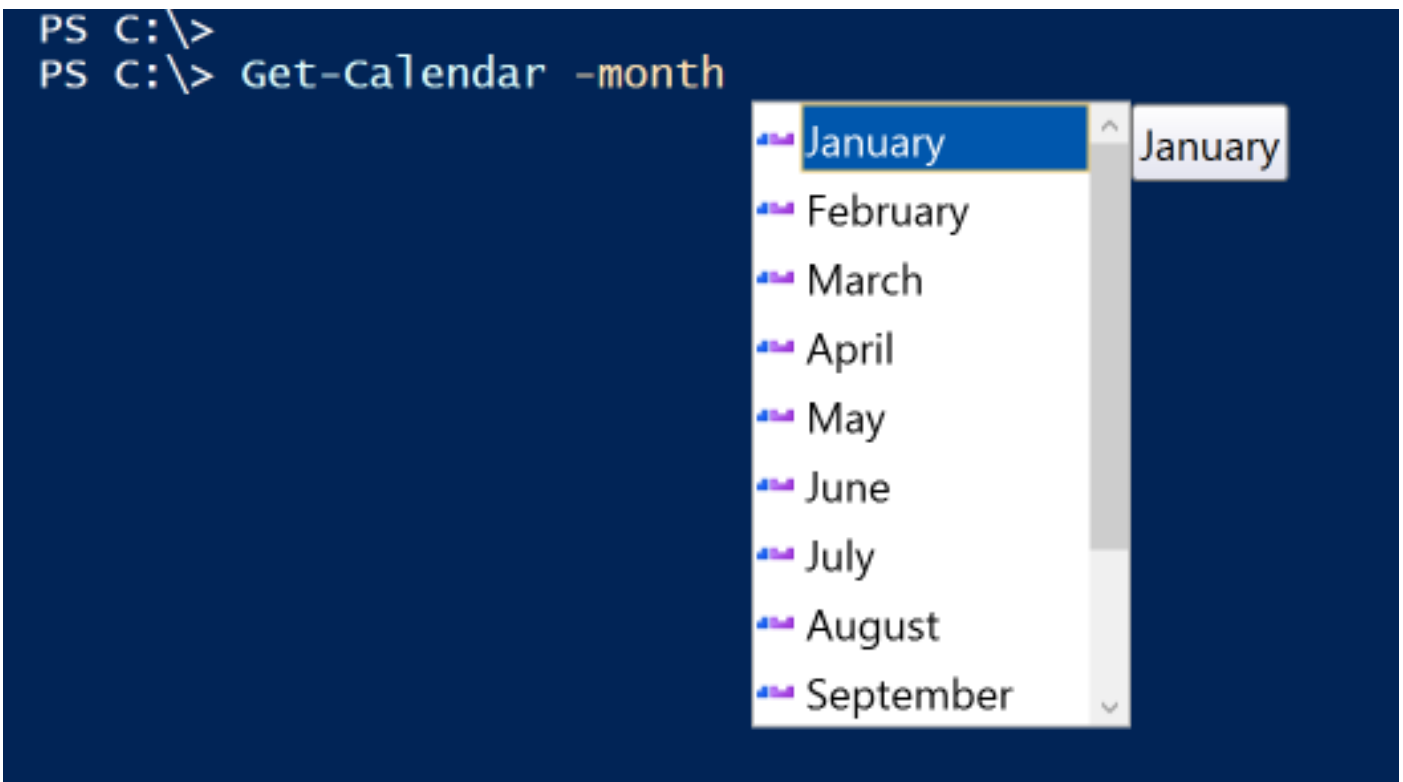

There is a similar autocomplete for `-Year` that begins with the current year and then the next 5 years. Although nothing prevents you from entering any year you want.

Highlighting Dates

You can specify dates to highlight using the `-HighlightDate` parameter. You can pass an array of dates, or a single date with multiple dates separated by commas. The dates should be in the culture-specific short date format. You can also specify just the day of the month, and the current month and year will be used.

If you specify a string, the date will be displayed using the ANSI sequence defined in `Get-PSCalendarConfiguration` for highlight. However, beginning with v2.11.0, you can also pass a hashtable where the key is the date to highlight and the value is the ANSI sequence to use.

```
$h = @{
    "8/1/2025" = "`e[1;3;38;5;213m"
    "8/13/2025" = $PSStyle.Foreground.BrightYellow
    "8/18/2025" = $PSStyle.Foreground.BrightYellow
    "8/9/2025" = $PSStyle.Foreground.BrightMagenta
    "8/29/2025" = $PSStyle.Foreground.BrightRed
}
Get-PSCalendar -HighlightDate $h
```

You can use any ANSI sequence or a `$PSStyle` value.

August 2025

```
PS C:\>
```

In previous versions of this module, there was a command called `Show-PSCalendar` which wrote a colorized version of the calendar to the host using `Write-Host`. This command has been rewritten and now is essentially a wrapper for `Get-PSCalendar`. The primary difference is that you can position the calendar with this command.

```
Show-PSCalendar -HighLightDate $h -Position $pos -Month July
```

```
PS C:\> _
```

One way you might want to use this is in your PowerShell console. You can use the prompt function like this:

```
Function prompt {
    #define a buffer cell fill
    $fill = [system.management.automation.host.buffercell]::new(" ",$host.UI.RawUI.BackgroundColor,$host.UI.RawUI.BackgroundColor,"complete")

    #define a rectangle with an upper left corner X distance from the edge
    $left = $host.UI.RawUI.WindowSize.width - 42

    #need to adjust positioning based on buffer size of the console
    #is the cursor beyond the window size, ie have we scrolled down?
    if ($host.UI.RawUI.CursorPosition.Y -gt $host.UI.RawUI.WindowSize.Height) {
        $top = $host.UI.RawUI.CursorPosition.Y - $host.UI.RawUI.WindowSize.Height
    }
    else {
        $top = 0
    }

    # System.Management.Automation.Host.Rectangle new(int left, int top, int right, int bottom)
    $r = [System.Management.Automation.Host.Rectangle]::new($left, 0, $host.UI.RawUI.WindowSize.width,$top+10)
```

```
#clear the area for the calendar display
$host.UI.RawUI.SetBufferContents($r,$fill)

#show the calendar in the upper right corner of the console
$pos = [system.management.automation.host.coordinates]::new($left,0)
Show-PSCalendar -Position $pos

"PS $($ExecutionContext.SessionState.Path.CurrentLocation)$('>' * ($nestedPromptLevel + 1)) ";

# .Link
# https://go.microsoft.com/fwlink/?LinkID=225750
# .ExternalHelp System.Management.Automation.dll-help.xml
}
```

Assuming the width of your console is at least 120, this code should work. Otherwise, you might need to tweak the positioning. This should also work in Windows Terminal. If you add some highlighted dates using `$PSDefaultParameterValues`, then you'll have a calendar right in front of you.

The screenshot shows a PowerShell prompt at C:\> where the command `$psversiontable` has been executed. The output is a table of system information, and to its right, a calendar for March 2025 is displayed. The calendar shows days of the week as columns and dates as rows. The date 28th of March is highlighted in red.

		March 2025						
		Sun	Mon	Tue	Wed	Thu	Fri	Sat
PSVersion	7.5.0	23	24	25	26	27	28	1
PSEdition	Core	2	3	4	5	6	7	8
GitCommitId	7.5.0	9	10	11	12	13	14	15
OS	Microsoft Windows 10.0.26100	16	17	18	19	20	21	22
Platform	Win32NT	23	24	25	26	27	28	29
PSCompatibleVersions	{1.0, 2.0, 3.0, 4.0...}	30	31	1	2	3	4	5
PSRemotingProtocolVersion	2.3							
SerializationVersion	1.1.0.1							
WSManStackVersion	3.0							

Note that any command output may be truncated because of the calendar display. This prompt function works as expected when using the Windows Terminal. Function needs work to behave as expected in a traditional PowerShell console where you might have a large buffer for scrolling.

Show-GuiCalendar

Finally, you can display a graphical calendar using a Windows Presentation Foundation (WPF) based script.

This command is not supported on non-Windows platforms.

The function runs the calendar-related code in a runspace so it does not block your prompt. You can display up to 3 months and specify dates to highlight.

```
Show-GuiCalendar 12/2025 2/2026 -highlight 12/24/25,12/25/25,12/31/25,1/1/26,1/18/26,2/14/26,2/22/26
```



The calendar form is transparent. But you should be able to click on it to drag it around your screen. You can also use the + and – keys to increase or decrease the calendar’s opacity. Be aware that if you close the PowerShell session that launched the calendar, the calendar too will close.

Beginning with module version 2.2.0 you can also customize the calendar background with an image:

```
Show-GuiCalendar -BackgroundImage D:\images\blue-robot-ps-thumb3.png -Stretch Fill -FontWeight DemiBold
```



Or you can specify a color. You can specify a WPF brush color like Cornsilk or Wheat, or use a color code like #FFF000:


```
Show-GuiCalendar -BackgroundColor "#FFF000"
```



On Windows platforms, the `-BackgroundColor` parameter will autocomplete the available brush colors.

Get-NCalendar

The Linux world has an `ncal` command which displays the month in a vertical fashion. `Get-NCalendar` and its alias `ncal` work in a similar manner. The default is for the current month and year.

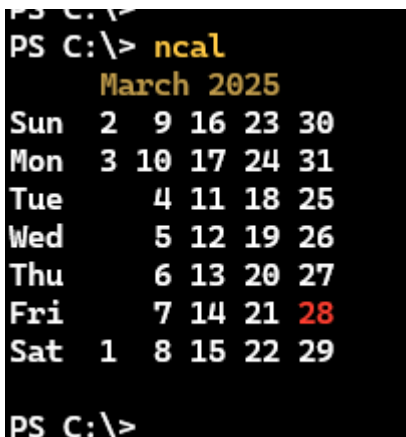

The current date will be highlighted unless you use `-HideHighlight`. You must use the full month name, although there is tab completion.

```
PS C:\> ncal July 2025
      July 2025
Sun      6 13 20 27
Mon      7 14 21 28
Tue   1   8 15 22 29
Wed   2   9 16 23 30
Thu   3  10 17 24 31
Fri      4 11 18 25
Sat      5 12 19 26
```

This command does not support date highlighting other than the current date. See below.

Get-MonthName

This simple command will list the full month names for the current culture.

```
PS C:\> Get-MonthName
January
February
March
April
May
June
July
August
September
October
November
December
```

You might use this to build a larger `ncal` listing.

```
PS C:\> Get-MonthName | Select-Object -first 3 | Get-NCalendar -Year 2025
    January 2025
Sun      5 12 19 26
Mon      6 13 20 27
Tue      7 14 21 28
Wed  1   8 15 22 29
Thu  2   9 16 23 30
Fri  3 10 17 24 31
Sat      4 11 18 25

    February 2025
Sun      2  9 16 23
Mon      3 10 17 24
Tue      4 11 18 25
Wed      5 12 19 26
Thu      6 13 20 27
Fri      7 14 21 28
Sat      1  8 15 22


    March 2025
Sun  2  9 16 23 30
Mon  3 10 17 24 31
Tue   4 11 18 25
Wed   5 12 19 26
Thu   6 13 20 27
Fri   7 14 21 28
Sat  1  8 15 22 29
```

Highlight Dates with Notes

Beginning with v2.2.0, in addition to specifying an array of dates to highlight, you can also use a hashtable. The key should be the highlight date, and the value a brief description.

```
$h = @{"7/4/2025"="4th of July Holiday";"7/14/2025"="Bastille Day";"7/22/2025"="Ballet recital"}  
Show-GuiCalendar -Start 7/1/2025 -HighlightDate $h -BackgroundColor wheat -FontWeight Bold -Font Tahoma
```

When you pass a hashtable, you will get a tooltip popup when you hover the mouse over the month.

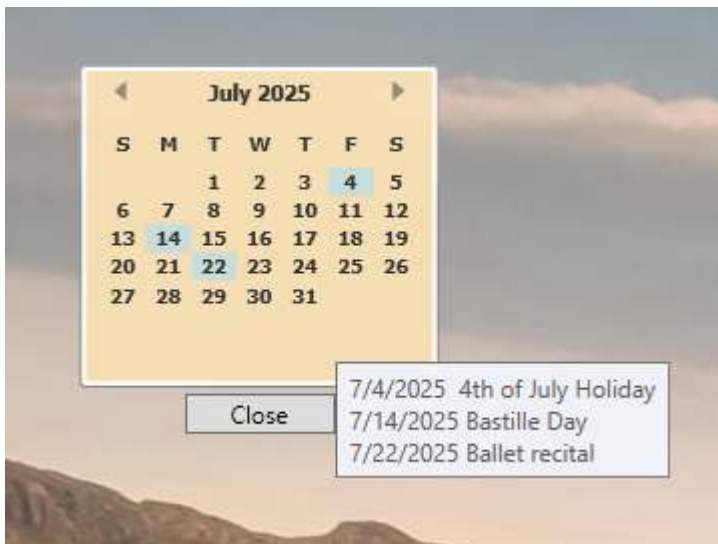

This function requires the WPF-related assemblies. It should work in Windows PowerShell and PowerShell 7. You will receive a warning if any incompatibility is detected.

Customizing the Calendar Appearance

Beginning with v2.0.0 of this module, ANSI escape sequences used to format the calendar are stored in module-scoped hashtable. You can use [Get-PSCalendarConfiguration](#) to view the current settings.

```
PS C:\> Get-PSCalendarConfiguration

Title       : `e[38;5;3m
DayOfWeek   : `e[1;4;36m
Today       : `e[91m
Highlight   : `e[92m
```

The output will show you the escape sequence appropriate for your PowerShell version. If you want to change a setting, you can use:

[Set-PSCalendarConfiguration](#)

You need to include the escape character but you do not need to include the closing escape sequence.

```
PS C:\> Set-PSCalendarConfiguration -Title "`e[48;5;57m"
PS C:\> Get-PSCalendarConfiguration

Title       : `e[48;5;57m
DayOfWeek   : `e[1;4;36m
Today       : `e[91m
Highlight   : `e[92m

PS C:\> Get-Calendar -Month July

      July 2025
  Sun  Mon  Tue  Wed  Thu  Fri  Sat
   29   30    1    2    3    4    5
    6    7    8    9   10   11   12
   13   14   15   16   17   18   19
   20   21   22   23   24   25   26
   27   28   29   30   31    1    2

PS C:\> _
```

This change lasts for the duration of your PowerShell session. If you want to make it more permanent, you will need to add the commands to your PowerShell profile script.

Or you can use [Export-PSCalendarConfiguration](#) to save the settings to a file. This command was added in v2.10.0.

```
PS C:\> Export-PSCalendarConfiguration -passthru
```

```
Directory: C:\Users\Jeff
```

Mode	LastWriteTime	Length	Name
-a---	3/29/2025 2:51 PM	136 B	.pscalendarConfiguration.json


The export process will save your configurations settings to a JSON file in `$HOME`. When you import the module, if the file is found, the values will be imported and used in your PowerShell session. If you want to revert to the default settings, delete the JSON file, `$HOME\.pscalendarConfiguration.json`.

If you uninstall the `PSCalendar` module, you will need to manually delete the JSON file.

ANSI Support

As you've seen, there are several commands in this module that rely on ANSI for formatting. The hosting application needs to be able to recognize and use ANSI escape sequences. These commands should work in both Windows PowerShell and PowerShell 7 in the traditional PowerShell consoles or in Windows Terminal. They will not work in the PowerShell ISE. ANSI-related output will be automatically disabled if the PowerShell ISE is detected.

If you aren't sure if your host supports ANSI, run `Get-PSReadlineOption`. You should see something like this:

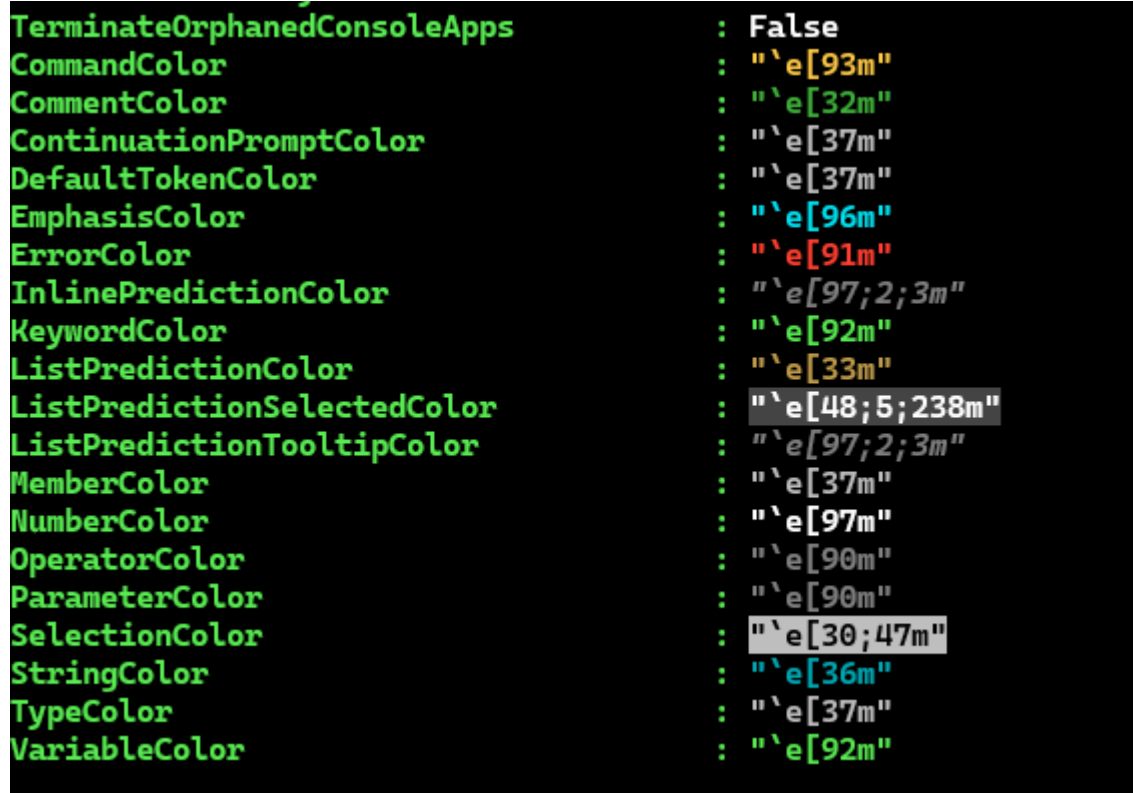

```
TerminateOrphanedConsoleApps      : False
CommandColor                      : "`e[93m"
CommentColor                      : "`e[32m"
ContinuationPromptColor          : "`e[37m"
DefaultTokenColor                 : "`e[37m"
EmphasisColor                    : "`e[96m"
ErrorColor                       : "`e[91m"
InlinePredictionColor             : "`e[97;2;3m"
KeywordColor                     : "`e[92m"
ListPredictionColor               : "`e[33m"
ListPredictionSelectedColor       : "`e[48;5;238m"
ListPredictionTooltipColor        : "`e[97;2;3m"
MemberColor                      : "`e[37m"
NumberColor                      : "`e[97m"
OperatorColor                    : "`e[90m"
ParameterColor                   : "`e[90m"
SelectionColor                   : "`e[30;47m"
StringColor                      : "`e[36m"
TypeColor                        : "`e[37m"
VariableColor                    : "`e[92m"
```

If you don't see color formatting, the hosting application doesn't support ANSI.

A Note on Culture

I've tried very hard to make the commands respect culture. Most commands now that string values to represent dates which are then treated as dates internally. For this reason, it is important that you follow the culture-specific short date format that you get from running this command:

```
(Get-Culture).DateTimeFormat.ShortDatePattern
```

In Windows PowerShell, all of the commands appear to respect culture settings. However, when running in PowerShell 7 there appears to be a bug in .NET Core and how it returns culture information for some cultures, specifically the first day of the week. If you run `Get-PSCalendar` or `Show-PSCalendar` and the week begins on the wrong day, use the `FirstDay` parameter to override the detected .NET values with the correct one.

```
PS C:\> Get-PSCalendar August -FirstDay Monday -highlight 1/8/2025,15,8,2025
```

August 2025						
Mon	Tue	Wed	Thu	Fri	Sat	Sun
26	27	28	29	30	31	1
2	3	4	5	6	7	8
9	10	11	12	13	14	15
16	17	18	19	20	21	22
23	24	25	26	27	28	29
30	31	1	2	3	4	

For example, if you are running under the `en-AU` culture, you would need to use this syntax.

Integrating with PSReminderLite

You might be interested in integrating this module with the [PSReminderLite](#) PowerShell module. The PSReminderLite module is a lightweight reminder system that uses a SQLite database.

```
PS C:\> Get-PSReminder -Tag Event
```

ID	Event	Comment	Date	Countdown
---	-----	-----	----	-----
1164	PowerShell Summit		4/7/2025 8:00 AM	8.16:53:32
1165	PowerShell Summit		4/8/2025 8:00 AM	9.16:53:32
1166	PowerShell Summit		4/9/2025 8:00 AM	10.16:53:32
1167	PowerShell Summit		4/10/2025 8:00 AM	11.16:53:32
1173	Workplace Ninjas UK		6/16/2025 9:00 AM	78.17:53:32
1174	Workplace Ninjas UK		6/17/2025 9:00 AM	79.17:53:32

I have configured my PowerShell profile to use PSReminder dates as highlighted dates in the calendar. In my PowerShell prompt function, I have this code:

```
$days = (Get-PSReminder -All).Where({-Not $_.Expired}).Date.ToShortDateString() | Select-Object -Unique
$PSDefaultParameterValues.'*-*Calendar:HighlightDate' = $days
```

This ensures that I always have my upcoming reminders highlighted in the calendar without having to manually enter them.

```
PS C:\> $PSDefaultParameterValues.GetEnumerator() | where Name -match calendar
```

Name	Value
----	-----
*-*Calendar:HighlightDate	{4/1/2025, 4/2/2025, 4/7/2025, 4/8/2025...}

```
[29 Mar 15:16] PS7.5 C:\> Get-PSReminder -Month 6
```

ID	Event	Comment	Date	Countdown
1192	Cmdlet Working Group		6/4/2025 12:00 PM	66.20:43:25
1173	Workplace Ninjas UK		6/16/2025 9:00 AM	78.17:43:25
1174	Workplace Ninjas UK		6/17/2025 9:00 AM	79.17:43:25
1193	Cmdlet Working Group		6/18/2025 12:00 PM	80.20:43:25
1206	PSConfEU		6/23/2025 8:00 AM	85.16:43:25
1207	PSConfEU		6/24/2025 8:00 AM	86.16:43:25
1208	PSConfEU		6/25/2025 8:00 AM	87.16:43:25
1209	PSConfEU		6/26/2025 8:00 AM	88.16:43:25

```
[29 Mar 15:16] PS7.5 C:\> Get-Calendar -Month June
```

June 2025

Sun	Mon	Tue	Wed	Thu	Fri	Sat
1	2	3	4	5	6	7
8	9	10	11	12	13	14
15	16	17	18	19	20	21
22	23	24	25	26	27	28
29	30	1	2	3	4	5

As an alternative, you could define a hashtable using tag settings from `Get-PSReminderTag` to color-code different types of reminders.

```
[regex]$rxPattern = "`e.*m"
#build a hashtable of tags and styles
Get-PSReminderTag | foreach -Begin {$tagHash = @{}} -Process {
    $tagHash.Add($_.Tag,$rxPattern.Replace($_.Style,""))
}
#get the default highlight style
$default = $rxPattern.Replace((Get-PSCalendarConfiguration).Highlight,"")
$days = @{}
(Get-PSReminder -All).Where({ -not $_.Expired }).Foreach({
    #use the first tag
    $tag = $_.Tags[0]
    if ($tag) {
        $style = $tagHash[$tag]
    }
    else {
        #if no tag, use the default calendar highlight style
        $style = $rxPattern.Replace((Get-PSCalendarConfiguration).Highlight,"")
    }
    $day = $_.Date.ToShortDateString()
    if (-Not ($days.ContainsKey($day))) {
        $days.Add($day,$style)
    }
})
$PSDefaultParameterValues.'*-Calendar:HighlightDate' = $days
```

```
PS C:\> Get-PSReminderTag

Tag      Style
-----
Holiday  `e[38;5;225m
travel   `e[38;5;141m
Testing  `e[3;92m
Priority  `e[1;3;38;5;199m
Personal `e[94m
Work     `e[38;5;192m
Event    `e[38;5;87m
Family   `e[38;5;156m

PS C:\> Get-Calendar -Start 8/1 -end 9/1 -FirstDay Monday

      August 2025
  Mon  Tue  Wed  Thu  Fri  Sat  Sun
  ---  ---  ---  ---  ---  ---  ---
    28    29    30    31     1     2     3
     4     5     6     7     8     9    10
    11    12    13    14    15    16    17
    18    19    20    21    22    23    24
    25    26    27    28    29    30    31
     1     2     3     4     5     6     7

      September 2025
  Mon  Tue  Wed  Thu  Fri  Sat  Sun
  ---  ---  ---  ---  ---  ---  ---
     1     2     3     4     5     6     7
     8     9    10    11    12    13    14
    15    16    17    18    19    20    21
    22    23    24    25    26    27    28
    29    30     1     2     3     4     5
```

Related Modules

You might also be interested in the [PSClock](#) module which displays a WPF-base clock on your desktop as well as [PSTimers](#) which is a PowerShell module with a number of timer and countdown commands.

Potential Issues

I have tried to make this module culture-aware. Testing across cultures is not an easy process. If you encounter a problem and are not running PowerShell under the `EN-US` culture, run the calendar command you are trying to use with `-Verbose` and post the results in a new issue. Or if you have both Windows PowerShell and PowerShell 7 installed, try the same command in both versions.

Please post any issues or feature requests in the module's [Issues](#).

Module Commands

This section contains the same help content you would get from a PowerShell prompt using `Get-Help`. Note that most code examples have been formatted to fit the 80 character page width and sometimes with artificial formatting. Don't assume you can run examples *exactly* as they are shown. Some of the help examples might also use special or custom characters that might not render properly in the PDF.

Remember, you can also view the online help for each command:

```
Help Get-Calendar -online
```

If you can't remember what commands are in this module, you can always ask PowerShell.

```
Get-Command -module PSCalendar
```

Or, if you have the [PSScriptTools](#) module installed, you can use the [Get-ModuleCommand](#) function to get a list of all commands in a module.

```
PS C:\> Get-ModuleCommand PSCalendar

ModuleName: PSCalendar [v2.10.0]

Name                Alias                Synopsis
-----                -
Export-PSCalendarConfiguration Save-PSCalendarConfiguration Save the current calendar configuration settings to a file.
Get-Calendar         cal                  Displays a visual representation of a calendar.
Get-MonthName        mon                  Get the list of month names.
Get-MCalendar        ncal                 Display a Linux-style ncal calendar.
Get-PSCalendarConfiguration Get the current PSCalendar ANSI configuration.
Set-PSCalendarConfiguration Modify the PSCalendar ANSI configuration.
Show-Calendar        scal                 Display a colored calendar month in the console.
Show-GuiCalendar     gcal                 Display a WPF-based calendar.
Show-PSCalendarHelp                                     Display a help PDF file for the PSCalendar module.
```

Commands not supported on non-Windows platforms will be handled on a per-command basis.

Export-PSCalendarConfiguration

Synopsis

Save the current calendar configuration settings to a file.

Syntax

```
Export-PSCalendarConfiguration [-Passthru] [-WhatIf] [-Confirm] [<CommonParameters>]
```

Description

If you have customized the calendar configuration settings, and which to always use them, use this command to export the settings to a JSON file in \$HOME. The next time you import the module, the settings will be automatically imported. If you want to revert to the default settings, delete the JSON file, \$HOME\PSCalendarConfiguration.json. If you uninstall the module, you will need to manually delete the JSON file.

This command was added in module version 2.10.0

Examples

Example 1

```
PS C:\> Export-PSCalendarConfiguration
```

Parameters

-Confirm

Prompts you for confirmation before running the cmdlet.

```
Type: SwitchParameter
Parameter Sets: (All)
Aliases: cf

Required: False
Position: Named
Default value: None
Accept pipeline input: False
Accept wildcard characters: False
```

-Passthru

Show the configuration settings file.

```
Type: SwitchParameter
Parameter Sets: (All)
Aliases:

Required: False
Position: Named
Default value: None
Accept pipeline input: False
Accept wildcard characters: False
```

-WhatIf

Shows what would happen if the cmdlet runs. The cmdlet is not run.

```
Type: SwitchParameter
Parameter Sets: (All)
Aliases: wi

Required: False
Position: Named
Default value: None
Accept pipeline input: False
Accept wildcard characters: False
```

CommonParameters

This cmdlet supports the common parameters: -Debug, -ErrorAction, -ErrorVariable, -InformationAction, -InformationVariable, -OutVariable, -OutBuffer, -PipelineVariable, -Verbose, -WarningAction, and -WarningVariable. For more information, see [about CommonParameters](#).

Inputs

None

Outputs

None

System.IO.FileInfo

Notes

This command has an alias of Save-PSCalendarConfiguration.

Learn more about PowerShell: <https://jdhitsolutions.com/yourls/newsletter>

Related Links

[Get-PSCalendarConfiguration](#)

[Set-PSCalendarConfiguration](#)

Get-PSCalendar

Synopsis

Displays a visual representation of a calendar.

Syntax

month (Default)

```
Get-PSCalendar [[-Month] <String>] [[-Year] <Int32>] [-HighlightDate <Object>] [-FirstDay <DayOfWeek>] [-NoANSI] [-NoWeekEnd] [-MonthOnly]
[<CommonParameters>]
```

quarter

```
Get-PSCalendar -Quarter <Int32> [[-Year] <Int32>] [-HighlightDate <Object>] [-FirstDay <DayOfWeek>] [-NoANSI] [-NoWeekEnd] [-MonthOnly] [<CommonParameters>]
```

span

```
Get-PSCalendar -Start <String> -End <String> [-HighlightDate <Object>] [-FirstDay <DayOfWeek>] [-NoANSI] [-NoWeekEnd] [-MonthOnly] [<CommonParameters>]
```

calyear

```
Get-PSCalendar [-HighlightDate <Object>] [-FirstDay <DayOfWeek>] [-NoANSI] [-NoWeekEnd] [-MonthOnly]
-CalendarYear <Int32> [<CommonParameters>]
```

Description

This command displays a visual representation of a calendar. It supports multiple months, as well as the ability to highlight a specific date or dates. The default display uses ANSI escape sequences. You can adjust the color scheme using `Set-PSCalendarConfiguration`.

To specify highlighted dates you can pass an array of date strings or a hashtable. The hashtable key will be the date and the value will be the color style to use for that date. See examples.

When you enter Highlight, Start, or End dates, be sure to use the format that is culturally appropriate. It should match the pattern you get from running this command:

```
(Get-Culture).DateTimeFormat.ShortDatePattern
```

Examples

Example 1

```
PS C:\> Get-PSCalendar
```

March 2025						
Sun	Mon	Tue	Wed	Thu	Fri	Sat
23	24	25	26	27	28	1
2	3	4	5	6	7	8
9	10	11	12	13	14	15
16	17	18	19	20	21	22
23	24	25	26	27	28	29
30	31	1	2	3	4	5

Show the current month. The current day will be formatted in color.

Example 2

```
PS C:\> Get-PSCalendar -start "3/1/2025" -end "5/1/2025"
```

Display monthly calendars from March to May, 2025.

Example 3

```
PS C:\> Get-PSCalendar December -HighLightDate 12/4/2025,12/25/2025,12/24/2025,12/31/2025
```

December 2025						
Sun	Mon	Tue	Wed	Thu	Fri	Sat
30	1	2	3	4	5	6
7	8	9	10	11	12	13
14	15	16	17	18	19	20
21	22	23	24	25	26	27
28	29	30	31	1	2	3

Display a month and highlight specific dates in color.

Example 4

```
PS C:\> Get-PSCalendar August -FirstDay Monday -NoANSI
```

August 2025						
Mon	Tue	Wed	Thu	Fri	Sat	Sun
28	29	30	31	1	2	3
4	5	6	7	8	9	10
11	12	13	14	15	16	17
18	19	20	21	22	23	24

25	26	27	28	29	30	31
1	2	3	4	5	6	7

In Windows PowerShell, all of the commands appear to respect culture settings. However, when running in PowerShell 7 there appears to be a bug in .NET Core and how it returns culture information for some cultures, specifically the first day of the week. If you run `Get-PSCalendar` or `Show-Calendar` and the week begins on the wrong day, use the `FirstDay` parameter to override the detected .NET values with the correct one. If you are running under the en-AU culture in PowerShell 7, you most likely will need to use the `FirstDay` parameter.

Example 5

```
PS C:\> Get-PSCalendar -NoANSI -Start 7/1/2025 -end 9/1/2025 | Out-File c:\work\Q3.txt
```

Get the calendars for a month of ranges with no ANSI formatting and save the output to a text file.

Example 6

```
PS C:\> Get-PSCalendar -Month January -Year 2025 -NoANSI -MonthOnly
```

```

      January 2025

Sun  Mon  Tue  Wed  Thu  Fri  Sat
    5    6    7    8    9   10   11
   12   13   14   15   16   17   18
   19   20   21   22   23   24   25
   26   27   28   29   30   31

```

Suppress leading and trailing days from other months with the `MonthOnly` parameter.

Example 7

```
PS C:\> Get-PSCalendar -CalendarYear 2025 -NoANSI | Out-File c:\work\2025.txt
```

Create a yearly calendar for 2025 and save the output to a text file.

Example 8

```
PS C:\> Get-PSCalendar -Quarter 2
```

Display the months for the second quarter of the current year. The months will be displayed in a single column.

Example 9

```
PS C:\> $h = @{
```

```
"8/1/2025" = "`e[1;3;38;5;213m"  
"8/13/2025" = $PSStyle.Foreground.BrightYellow  
"8/18/2025" = $PSStyle.Foreground.BrightYellow  
"8/9/2025" = $PSStyle.Foreground.BrightMagenta  
"8/29/2025" = $PSStyle.Foreground.BrightRed  
}  
PS C:\> Get-PSCalendar August -FirstDay Monday -HighLightDate $h
```

August 2025

Mon	Tue	Wed	Thu	Fri	Sat	Sun
28	29	30	31	1	2	3
4	5	6	7	8	9	10
11	12	13	14	15	16	17
18	19	20	21	22	23	24
25	26	27	28	29	30	31
1	2	3	4	5	6	7

Highlight dates using a hashtable. The key is the date and the value is the color style to use for that date. You can use an ANSI escape sequence or a predefined color from `$PSStyle`. The dates will be formatted accordingly.

Parameters

-Month

Select a month to display. The command will default to the current year unless otherwise specified.

```
Type: String  
Parameter Sets: month  
Aliases:  
  
Required: False  
Position: 0  
Default value: current month  
Accept pipeline input: False  
Accept wildcard characters: False
```

-Quarter

Specify a calendar year quarter to display.

```
Type: Int32  
Parameter Sets: quarter  
Aliases:  
  
Required: True  
Position: Named  
Default value: None  
Accept pipeline input: False  
Accept wildcard characters: False
```

-CalendarYear

Enter a year between 1000 and 3000 to display in calendar view.

```
Type: Int32
Parameter Sets: calyear
Aliases:

Required: True
Position: Named
Default value: None
Accept pipeline input: False
Accept wildcard characters: False
```

-Year

Select a year for the specified month.

```
Type: Int32
Parameter Sets: month, quarter
Aliases:

Required: False
Position: 1
Default value: Current year
Accept pipeline input: False
Accept wildcard characters: False
```

-Start

The first month to display. You must format the dates to match your culture. It should match the pattern you get from running this command:

```
(Get-Culture).DateTimeFormat.ShortDatePattern
```

```
Type: String
Parameter Sets: span
Aliases:

Required: True
Position: Named
Default value: None
Accept pipeline input: False
Accept wildcard characters: False
```

-End

The last month to display. You must format the dates to match your culture. It should match the pattern you get from running this command:

```
(Get-Culture).DateTimeFormat.ShortDatePattern
```

```
Type: String
Parameter Sets: span
Aliases:

Required: True
Position: Named
Default value: None
Accept pipeline input: False
Accept wildcard characters: False
```

-HighlightDate

Specific days (named) to highlight. These dates are color formatted using ANSI escape sequences. You must format the dates to match your culture. It should match the pattern you get from running this command:

```
(Get-Culture).DateTimeFormat.ShortDatePattern
```

You can specify an array of strings or use a hashtable. See examples.

```
Type: Object
Parameter Sets: (All)
Aliases:

Required: False
Position: Named
Default value: None
Accept pipeline input: False
Accept wildcard characters: False
```

-FirstDay

Specify the first day of the week. There is a potential bug in .NET Core where the detected first day of the week is incorrect. If that is true for your culture, use this parameter to manually specify the correct first day of the week.

```
Type: DayOfWeek
Parameter Sets: (All)
Aliases:

Required: False
Position: Named
Default value: ([System.Globalization.CultureInfo]::CurrentCulture).DateTimeFormat.FirstDayOfWeek
Accept pipeline input: False
Accept wildcard characters: False
```

-NoANSI

Do not use any ANSI formatting. The output will be plain-text. This also means that the current day and highlight dates will not be reflected in the output. This parameter has no affect when running the command in the PowerShell ISE. There is no color formatting when using this host.

```
Type: SwitchParameter
Parameter Sets: (All)
Aliases:

Required: False
Position: Named
Default value: None
Accept pipeline input: False
Accept wildcard characters: False
```

-MonthOnly

Do not show any leading or trailing days from other months.

```
Type: SwitchParameter
Parameter Sets: (All)
Aliases:

Required: False
Position: Named
Default value: None
Accept pipeline input: False
Accept wildcard characters: False
```

-NoWeekEnd

Do not highlight weekends. If you use the NoAnsi parameter you will get the same result.

```
Type: SwitchParameter
Parameter Sets: (All)
Aliases:

Required: False
Position: Named
Default value: None
Accept pipeline input: False
Accept wildcard characters: False
```

CommonParameters

This cmdlet supports the common parameters: -Debug, -ErrorAction, -ErrorVariable, -InformationAction, -InformationVariable, -OutVariable, -OutBuffer, -PipelineVariable, -Verbose, -WarningAction, and -WarningVariable. For more information, see [about CommonParameters](#).

Inputs

Outputs

System.String

Notes

This command should have an alias of cal. This function was originally inspired from work by Lee Holmes at <http://www.leeholmes.com/blog/2008/12/03/showing-calendars-in-your-oof-messages/>.

Learn more about PowerShell: <https://jdhitsolutions.com/yourls/newsletter>

Related Links

[Get-Date](#)

[Set-PSCalendarConfiguration](#)

[Show-PSCalendar](#)

[Show-GuiCalendar](#)

[Get-NCalendar](#)

Get-MonthName

Synopsis

Get the list of month names.

Syntax

```
Get-MonthName [-Short] [<CommonParameters>]
```

Description

This command will return a list of month names according to your current culture.

Examples

Example 1

```
PS C:\> Get-MonthName
January
February
March
April
May
June
July
August
September
October
November
December
```

Get the standard list of month names.

Example 2

```
PS C:\> Get-MonthName -Short
Jan
Feb
Mar
Apr
May
Jun
Jul
Aug
Sep
Oct
Nov
```

Dec

Get the list of short month names.

Parameters

-Short

Get short month names.

```
Type: SwitchParameter
Parameter Sets: (All)
Aliases:

Required: False
Position: Named
Default value: None
Accept pipeline input: False
Accept wildcard characters: False
```

CommonParameters

This cmdlet supports the common parameters: -Debug, -ErrorAction, -ErrorVariable, -InformationAction, -InformationVariable, -OutVariable, -OutBuffer, -PipelineVariable, -Verbose, -WarningAction, and -WarningVariable. For more information, see [about CommonParameters](#).

Inputs

None

Outputs

String

Notes

Learn more about PowerShell: <https://jdhitsolutions.com/yourls/newsletter>

Related Links

Get-Culture

Get-NCalendar

Synopsis

Display a Linux-style ncal calendar.

Syntax

```
Get-NCalendar [[-Month] <String>] [[-Year] <Int32>] [-HideHighlight] [-Monday] [<CommonParameters>]
```

Description

This command generates equivalent output to the ncal Linux command. This is not a 100% port of that command but it should provide similar results for the same month and year. You should enter the complete month name. There should be tab-completion for the month and year values. This command has an alias of ncal on Windows platforms.

If you run this command in the PowerShell ISE, there will be no highlighting or ANSI formatting.

Examples

Example 1

```
PS C:\> Get-NCalendar
      March 2025
Sun   2   9 16 23 30
Mon   3  10 17 24 31
Tue    4  11 18 25
Wed    5  12 19 26
Thu    6  13 20 27
Fri    7  14 21 28
Sat   1   8 15 22 29
```

Get the calendar for the current month. The current day will be highlighted.

Example 2

```
PS C:\> ncal April 2025
      April 2025
Sun    6  13 20 27
Mon    7  14 21 28
Tue   1   8 15 22 29
Wed   2   9 16 23 30
Thu    3  10 17 24
Fri    4  11 18 25
Sat    5  12 19 26
```

Get an ncal for April 2025. This example is using the ncal alias.

Example 3

```
PS C:\> Get-MonthName | ncal
```

```
    January 2025
Sun      5 12 19 26
Mon      6 13 20 27
Tue      7 14 21 28
Wed  1   8 15 22 29
Thu  2   9 16 23 30
Fri  3 10 17 24 31
Sat      4 11 18 25
```

```
    February 2025
Sun      2  9 16 23
Mon      3 10 17 24
Tue      4 11 18 25
Wed      5 12 19 26
Thu      6 13 20 27
Fri      7 14 21 28
Sat      1  8 15 22
```

```
    March 2025
Sun  2  9 16 23 30
Mon  3 10 17 24 31
Tue   4 11 18 25
Wed   5 12 19 26
Thu   6 13 20 27
Fri   7 14 21 28
Sat  1  8 15 22 29
...
```

Display an ncal listing for the entire year.

Parameters

-Month

Enter the full month name. You should be able to tab-complete the parameter value. The default is the current month.

```
Type: String
Parameter Sets: (All)
Aliases:

Required: False
Position: 0
Default value: current month
Accept pipeline input: True (ByPropertyName, ByValue)
Accept wildcard characters: False
```

-Year

Enter the 4 digit year. You should be able to tab-complete the next 5 years but you can enter any 4 digit year. The default is the current year.

```
Type: Int32
Parameter Sets: (All)
Aliases:

Required: False
Position: 1
Default value: current year
Accept pipeline input: True (ByPropertyName)
Accept wildcard characters: False
```

-HideHighlight

Don't highlight the current date. This parameter is automatically set to true when running in the PowerShell ISE.

```
Type: SwitchParameter
Parameter Sets: (All)
Aliases:

Required: False
Position: Named
Default value: None
Accept pipeline input: False
Accept wildcard characters: False
```

-Monday

Start the week on Monday.

```
Type: SwitchParameter
Parameter Sets: (All)
Aliases:

Required: False
Position: Named
Default value: None
Accept pipeline input: False
Accept wildcard characters: False
```

CommonParameters

This cmdlet supports the common parameters: -Debug, -ErrorAction, -ErrorVariable, -InformationAction, -InformationVariable, -OutVariable, -OutBuffer, -PipelineVariable, -Verbose, -WarningAction, and -WarningVariable. For more information, see [about CommonParameters](#).

Inputs

None

Outputs

String

Notes

Learn more about PowerShell: <https://jdhitsolutions.com/yourls/newsletter>

Related Links

[Get-PSCalendar](#)

[Get-MonthName](#)

Get-PSCalendarConfiguration

Synopsis

Get the current PSCalendar ANSI configuration.

Syntax

```
Get-PSCalendarConfiguration [<CommonParameters>]
```

Description

Get-Calendar and Show-Calendar commands rely on ANSI escape sequences to colorize the output. You can use this command to view the current settings. The settings will use an appropriate escape character based on your PowerShell version. Use Set-PSCalendarConfiguration to modify the settings.

Examples

Example 1

```
PS C:\> Get-PSCalendarConfiguration
```

```
Title      : `e[1;3;38;5;120m
DayOfWeek  : `e[1;4;36m
Today      : `e[92m
Highlight  : `e[1;3;38;5;213m
Weekend    : `e[38;5;252m
```

The display will be formatted with the corresponding ANSI escape sequence. The escape character, will reflect your current PowerShell version.

Parameters

CommonParameters

This cmdlet supports the common parameters: -Debug, -ErrorAction, -ErrorVariable, -InformationAction, -InformationVariable, -OutVariable, -OutBuffer, -PipelineVariable, -Verbose, -WarningAction, and -WarningVariable. For more information, see [about CommonParameters](#).

Inputs

None

Outputs

PSCalendarConfiguration

Notes

Related Links

[Set-PSCalendarConfiguration](#)

[Export-PSCalendarConfiguration](#)

Set-PSCalendarConfiguration

Synopsis

Modify the PSCalendar ANSI configuration.

Syntax

```
Set-PSCalendarConfiguration [[-Title] <String>] [[-DayOfWeek] <String>] [[-Today] <String>]  
[[ -Highlight] <String>] [-Weekend <String>] [-WhatIf] [-Confirm] [<CommonParameters>]
```

Description

The Get-Calendar and Show-Calendar commands use ANSI escape sequences to colorize the output. Get-PSCalendarConfiguration will display the current settings. You can use Set-PSCalendarConfiguration to modify the settings. You will need to include the escape sequence appropriate for your PowerShell version. You do not need to include the closing escape sequence. If you are looking for suggestions, take a look at Get-PSReadlineOption.

Any configuration changes you make are only for the duration of your PowerShell session. If you want to make them more permanent, you can add Set-PSCalendarConfiguration commands to your PowerShell profile.

Examples

Example 1

```
PS C:\> Set-PSCalendarConfiguration -Title "$([char]27)[48;5;57m"
```

Change the title color scheme on Windows 5.1. This syntax would also work in PowerShell 7.

Example 2

```
PS C:\> Set-PSCalendarConfiguration -DayOfWeek "`e[48;5;57m"
```

Change the week day headings color scheme on PowerShell 7.

Parameters

-Confirm

Prompts you for confirmation before running the cmdlet.

```
Type: SwitchParameter
Parameter Sets: (All)
Aliases: cf

Required: False
Position: Named
Default value: None
Accept pipeline input: False
Accept wildcard characters: False
```

-DayOfWeek

Specify an ANSI sequence for the day of the week heading.

```
Type: String
Parameter Sets: (All)
Aliases:

Required: False
Position: 1
Default value: None
Accept pipeline input: False
Accept wildcard characters: False
```

-Highlight

Specify the ANSI escape sequence to highlight specified dates.

```
Type: String
Parameter Sets: (All)
Aliases:

Required: False
Position: 3
Default value: None
Accept pipeline input: False
Accept wildcard characters: False
```

-Title

Specify the ANSI escape sequence for the calendar title which will be the month and year.

```
Type: String
Parameter Sets: (All)
Aliases:

Required: False
Position: 0
Default value: None
Accept pipeline input: False
Accept wildcard characters: False
```

-Today

Specify the ANSI escape sequence to highlight the current day.

```
Type: String
Parameter Sets: (All)
Aliases:

Required: False
Position: 2
Default value: None
Accept pipeline input: False
Accept wildcard characters: False
```

-Weekend

Specify an ANSI escape sequence for weekend days.

```
Type: String
Parameter Sets: (All)
Aliases:

Required: False
Position: Named
Default value: None
Accept pipeline input: False
Accept wildcard characters: False
```

-WhatIf

Shows what would happen if the cmdlet runs. The cmdlet is not run.

```
Type: SwitchParameter
Parameter Sets: (All)
Aliases: wi

Required: False
Position: Named
Default value: None
Accept pipeline input: False
Accept wildcard characters: False
```

CommonParameters

This cmdlet supports the common parameters: -Debug, -ErrorAction, -ErrorVariable, -InformationAction, -InformationVariable, -OutVariable, -OutBuffer, -PipelineVariable, -Verbose, -WarningAction, and -WarningVariable. For more information, see [about CommonParameters](#).

Inputs

None

Outputs

None

Notes

Related Links

[Get-PSCalendarConfiguration](#)

[Export-PSCalendarConfiguration](#)

Show-PSCalendar

Synopsis

Display a colored calendar month in the console.

Syntax

month

```
Show-PSCalendar [[-Month] <String>] [[-Year] <Int32>] [-HighLightDate <Object>] [-FirstDay <DayOfWeek>] [-Position <Coordinates>] [-MonthOnly] [<CommonParameters>]
```

quarter

```
Show-PSCalendar -Quarter <Int32> [[-Year] <Int32>] [-HighLightDate <Object>] [-FirstDay <DayOfWeek>] [-MonthOnly] [<CommonParameters>]
```

calyear

```
Show-PSCalendar [-HighLightDate <Object>] [-FirstDay <DayOfWeek>] [-MonthOnly] -CalendarYear <Int32> [<CommonParameters>]
```

Description

This command is a wrapper for Get-PSCalendar that essentially shows the same result. The only difference is that you can use Show-PSCalendar to display the calendar at a specific position in your PowerShell session. This function is also retained for backward compatibility.

To specify highlighted dates you can pass an array of date strings or a hashtable. The hashtable key will be the date and the value will be the color style to use for that date. See examples.

Examples

Example 1

```
PS C:\> Show-PSCalendar
```

Display a colored version of the current month.

Example 2

```
PS C:\> Show-PSCalendar -Month February -Year 2025 -HighLightDate 2/22/21
```

Display February 2025 and highlight the 22nd using the default highlight color.

Example 3

```
PS C:\> Show-PSCalendar -Position ([system.management.automation.host.coordinates]::new(75,1))
```

Display the calendar at a specified X,Y position in the console. This parameter will not work in the PowerShell ISE.

Example 4

```
PS C:\> Show-PSCalendar -Month January -Year 2025 -MonthOnly
```

```

          January 2025

Sun  Mon  Tue  Wed  Thu  Fri  Sat
    5    6    7    8    9   10   11
  12   13   14   15   16   17   18
  19   20   21   22   23   24   25
  26   27   28   29   30   31

```

Suppress leading and trailing days from other months with the MonthOnly parameter.

Example 5

```
PS C:\> Show-PSCalendar -Quarter 2
```

Display the months for the second quarter of the current year. The months will be displayed in a single column.

Example 6

```

PS C:\> $h = @{
    "8/1/2025" = "`e[1;3;38;5;213m"
    "8/13/2025" = $PSStyle.Foreground.BrightYellow
    "8/18/2025" = $PSStyle.Foreground.BrightYellow
    "8/9/2025" = $PSStyle.Foreground.BrightMagenta
    "8/29/2025" = $PSStyle.Foreground.BrightRed
}
PS C:\> Show-PSCalendar August -FirstDay Monday -HighLightDate $h

```

```

          August 2025

Mon  Tue  Wed  Thu  Fri  Sat  Sun
  28   29   30   31    1    2    3
   4    5    6    7    8    9   10

```

11	12	13	14	15	16	17
18	19	20	21	22	23	24
25	26	27	28	29	30	31
1	2	3	4	5	6	7

Highlight dates using a hashtable. The key is the date and the value is the color style to use for that date. You can use an ANSI escape sequence or a predefined color from `$PSStyle`. The dates will be formatted accordingly.

Parameters

-Month

Select a month to display. The command will default to the current year unless otherwise specified.

```
Type: String
Parameter Sets: month
Aliases:

Required: False
Position: 1
Default value: Current month
Accept pipeline input: False
Accept wildcard characters: False
```

-Quarter

Specify a calendar year quarter to display.

```
Type: Int32
Parameter Sets: quarter
Aliases:

Required: True
Position: Named
Default value: None
Accept pipeline input: False
Accept wildcard characters: False
```

-CalendarYear

Enter a year between 1000 and 3000 to display in calendar view.

```
Type: Int32
Parameter Sets: calyear
Aliases:

Required: True
Position: Named
Default value: None
Accept pipeline input: False
```

```
Accept wildcard characters: False
```

-Year

Select a year for the specified month.

```
Type: Int32
Parameter Sets: month, quarter
Aliases:

Required: False
Position: 2
Default value: current year
Accept pipeline input: False
Accept wildcard characters: False
```

-HighLightDate

Specific days (named) to highlight. These dates are color formatted using ANSI escape sequences. You must format the dates to match your culture. It should match the pattern you get from running this command:

```
(Get-Culture).DateTimeFormat.ShortDatePattern
```

You can specify an array of strings or use a hashtable. See examples.

```
Type: Object
Parameter Sets: (All)
Aliases:

Required: False
Position: Named
Default value: None
Accept pipeline input: False
Accept wildcard characters: False
```

-Position

Enter a `System.Management.Automation.Host.Coordinates` object to specify a location for the calendar. This may not work properly in all hosts or PowerShell versions and you might need some trial and error to figure out a position that works for you.

```
Type: Coordinates
Parameter Sets: month
Aliases:

Required: False
Position: Named
Default value: None
Accept pipeline input: False
Accept wildcard characters: False
```

-FirstDay

Specify the first day of the week. There is a potential bug in .NET Core where the detected first day of the week is incorrect. If that is true for your culture, use this parameter to manually specify the correct first day of the week.

```
Type: DayOfWeek
Parameter Sets: (All)
Aliases:

Required: False
Position: Named
Default value: ([System.Globalization.CultureInfo]::CurrentCulture).DateTimeFormat.FirstDayOfWeek
Accept pipeline input: False
Accept wildcard characters: False
```

-MonthOnly

Do not show any leading or trailing days.

```
Type: SwitchParameter
Parameter Sets: (All)
Aliases:

Required: False
Position: Named
Default value: None
Accept pipeline input: False
Accept wildcard characters: False
```

CommonParameters

This cmdlet supports the common parameters: -Debug, -ErrorAction, -ErrorVariable, -InformationAction, -InformationVariable, -OutVariable, -OutBuffer, -PipelineVariable, -Verbose, -WarningAction, and -WarningVariable. For more information, see [about CommonParameters](#).

Inputs

None

Outputs

System.String

Notes

This command should have an alias of scal.

Learn more about PowerShell: <https://jdhitsolutions.com/yourls/newsletter>

Related Links

[Get-PSCalendar](#)

[Show-GuiCalendar](#)

Show-GuiCalendar

Synopsis

Display a WPF-based calendar.

Syntax

basic (Default)

```
Show-GuiCalendar [[-Start] <String>] [[-End] <String>] [-HighlightDate <Object[]>] [-Font <String>] [-FontStyle <String>] [-FontWeight <String>] [-FirstDay <DayOfWeek>] [<CommonParameters>]
```

bgimage

```
Show-GuiCalendar [[-Start] <String>] [[-End] <String>] [-HighlightDate <Object[]>] [-Font <String>] [-FontStyle <String>] [-FontWeight <String>] [-BackgroundImage <String>] [-Stretch <String>] [-FirstDay <DayOfWeek>] [<CommonParameters>]
```

bgcolor

```
Show-GuiCalendar [[-Start] <String>] [[-End] <String>] [-HighlightDate <Object[]>] [-Font <String>] [-FontStyle <String>] [-FontWeight <String>] [-BackgroundColor <String>] [-FirstDay <DayOfWeek>] [<CommonParameters>]
```

Description

If you are running Windows PowerShell or a version of PowerShell that supports the [System.Windows.Media].NET class, you can display a graphical calendar. You can specify up to 3 months. There are also parameters to fine-tune the calendar style. The calendar form itself is transparent, but you should be able to click on it to drag it around your screen. You can also use the + and - keys to increase or decrease the calendar's opacity. You may have to click on a calendar before making any adjustments.

This command launches the calendar in a separate runspace so that it doesn't block your prompt. However, if you close the PowerShell session that launched the calendar, the calendar will also automatically close. You can display as many different calendars as you want at the same time.

You must format the dates to match your culture. It should match the pattern you get from running this command:

```
(Get-Culture).DateTimeFormat.ShortDatePattern
```

Examples

Example 1

```
PS C:\> Show-GuiCalendar
```

Display the current month as a graphical calendar.

Example 2

```
PS C:\> Show-GuiCalendar -start 12/2024 -end 2/2025 -highlight 12/24/24,12/25/24,12/31/24,1/1/25,2/14/25 -font 'Century Gothic' -FontStyle italic
```

Display 3 months with selected dates highlighted and style the calendar to font settings.

Example 3

```
PS C:\> Show-GuiCalendar -fontweight bold -backgroundcolor Azure
```

Display the current month with a bold font and the specified background color.

Example 4

```
PS C:\> $h = @{"7/4/2025"="4th of July";"7/14/2025"="Bastille Day";"7/22/2025"="Family Visit"}
PS C:\> Show-GuiCalendar -start 7/1/2025 -BackgroundImage c:\scripts\zazu.gif -HighLightDate $h
```

Display July 2025 with a background image and use the hashtable of highlight dates. A highlight summary will be displayed as a tool tip for the month.

Parameters

-End

Enter the last month to display by date, like 3/1/2024. You cannot display more than 3 months.

```
Type: String
Parameter Sets: (All)
Aliases:

Required: False
Position: 2
Default value: Current month
Accept pipeline input: False
Accept wildcard characters: False
```

-Font

Select a font family for your calendar.

```
Type: String
Parameter Sets: (All)
Aliases:
Accepted values: Segoi UI, QuickType, Tahoma, Lucida Console, Century Gothic

Required: False
Position: Named
Default value: Segoi UI
Accept pipeline input: False
Accept wildcard characters: False
```

-FontStyle

Select a font style for your calendar.

```
Type: String
Parameter Sets: (All)
Aliases:
Accepted values: Normal, Italic, Oblique

Required: False
Position: Named
Default value: Normal
Accept pipeline input: False
Accept wildcard characters: False
```

-FontWeight

Select a font weight for your calendar.

```
Type: String
Parameter Sets: (All)
Aliases:
Accepted values: Normal, DemiBold, Light, Bold

Required: False
Position: Named
Default value: Normal
Accept pipeline input: False
Accept wildcard characters: False
```

-HighLightDate

Enter an array of dates to highlight like 12/25/2024,12/31/2024 or a hashtable where the key is the date and the value is a description. This data will be displayed as a tooltip for each month.

```
Type: Object[]
```

Parameter Sets: (All)

Aliases:

Required: False

Position: Named

Default value: None

Accept pipeline input: False

Accept wildcard characters: False

-Start

Enter the first month to display by date, like 1/1/2025.

Type: String

Parameter Sets: (All)

Aliases:

Required: False

Position: 1

Default value: Current month

Accept pipeline input: False

Accept wildcard characters: False

-BackgroundColor

Specify calendar background color. On Windows platforms you should be able to tab complete possible colors. Or you can use a color format like '#FFF000'. Remember to wrap this kind of value in quotes.

Type: String

Parameter Sets: bgcolor

Aliases:

Required: False

Position: Named

Default value: None

Accept pipeline input: False

Accept wildcard characters: False

-BackgroundImage

Specify the path to an image to use as the background.

Type: String

Parameter Sets: bgimage

Aliases:

Required: False

Position: Named

Default value: None

Accept pipeline input: False

Accept wildcard characters: False

-FirstDay

Specify the first day of the week. Normally, .NET should detect the first day of the week based on culture settings. But if for some reason, .NET is detecting incorrect information, you can manually set the first day of the week with this parameter.

```
Type: DayOfWeek
Parameter Sets: (All)
Aliases:

Required: False
Position: Named
Default value: None
Accept pipeline input: False
Accept wildcard characters: False
```

-Stretch

Specify image stretch setting. Possible values are None, Fill, Uniform, and UniformToFill

```
Type: String
Parameter Sets: bgimage
Aliases:

Required: False
Position: Named
Default value: None
Accept pipeline input: False
Accept wildcard characters: False
```

CommonParameters

This cmdlet supports the common parameters: -Debug, -ErrorAction, -ErrorVariable, -InformationAction, -InformationVariable, -OutVariable, -OutBuffer, -PipelineVariable, -Verbose, -WarningAction, and -WarningVariable. For more information, see [about CommonParameters](#).

Inputs

None

Outputs

None

Notes

This function requires the WPF-related assemblies. It should work in Windows PowerShell and PowerShell 7 on Windows. You will receive a warning if any incompatibility is detected.

This command has an alias of gcal.

Learn more about PowerShell: <https://jdhitsolutions.com/yourls/newsletter>

Related Links

[Show-PSCalendar](#)

[Get-PSCalendar](#)

Show-PSCalendarHelp

Synopsis

Display a help PDF file for the PSCalendar module.

Syntax

```
Show-PSCalendarHelp [-Online] [<CommonParameters>]
```

Description

This command will open a local PDF copy of the module's README file. The file will contain additional information and screenshots. The command will open the file using whatever application you have associated with the .PDF file extension. Alternatively, you can use the -Online switch to open the README file in the modules Github repository using your default web browser.

Examples

Example 1

```
PS C:\> Show-PSCalendarHelp
```

Parameters

-Online

Opens the PSCalendar README file in the Github repository.

```
Type: SwitchParameter
Parameter Sets: (All)
Aliases:

Required: False
Position: Named
Default value: None
Accept pipeline input: False
Accept wildcard characters: False
```

CommonParameters

This cmdlet supports the common parameters: -Debug, -ErrorAction, -ErrorVariable, -InformationAction, -InformationVariable, -OutVariable, -OutBuffer, -PipelineVariable, -Verbose, -WarningAction, and -WarningVariable. For more information, see [about CommonParameters](#).

Inputs

None

Outputs

None

Notes

Learn more about PowerShell: <https://jdhitsolutions.com/yourls/newsletter>

Related Links

<https://github.com/jdhitsolutions/PSCalendar>