

A framework to research procedural content generation in First Person Shooters

Marco Ballabio



Abstract

Level design plays a key role in the development of a video game, since it allows to transform the *game design* in the actual *gameplay* that the final user is going to experience. Nevertheless, we are still far from a scientific approach to the subject, with a complete lack of a shared terminology and almost no experimental validation for the most used techniques. Even if the video game industry doesn't acknowledge this problem, in the last years the academic environments have shown an increasing interest towards this subject.

We analyzed the main breakthroughs made in *level design* research applied to the genre of *First Person Shooters*, devoting particular attention to the ones that try to assist the design process by employing *Search-Based Procedural Content Generation* combined with *evolutionary algorithms*. We noticed that in most cases researchers recur to *validation* via *artificial agents*, since human play-test sessions are too time-consuming and allow to collect only a limited amount of data. Unfortunately, this solution decreases the scientific soundness of the obtained results, since the behavior of an AI, no matter how advanced, is different from the one of a human player. To solve this problem, we developed an *open-source framework* capable of deploying online experiments to collect data from real users via a browser FPS game.

We also explored a novel approach to procedural generation of contents, developing a tool that uses Graph Theory to displace spawn-points and resources in a procedurally generated map. Finally, we used our framework to validate this tool by means of an online data-collection campaign.

Sommario

Il *Level design* gioca un ruolo chiave nello sviluppo di un videogioco, dal momento che permette di trasformare il *game design* nell'effettiva esperienza di *gameplay* che verrà sperimentata dall'utente finale. Nonostante ciò, siamo ancora lontani da un approccio scientifico verso la materia, a casua della completa mancanza di un vocabolario condiviso e della quasi totale assenza di validazione sperimentale per le tecniche più comuni. Anche se l'industria tende ad ignorare questo problema, negli ultimi anni gli ambienti accademici hanno mostrato un crescente interesse verso questo campo.

Abbiamo analizzato le principali scoperte fatte nel campo del *level design* applicato al genere dei *First Person Shooter*, riservando particolare attenzione ai casi dove si usa la *generazione procedurale di contenuti* tramite *algoritmi evolutivi* per assistere il processo di design. Abbiamo notato che nella maggior parte dei casi i ricercatori ricorrono alla *validazione* tramite *agenti artificiali*, dal momento che organizzare sessioni di test con giocatori umani richiede molto tempo e permette di raccogliere una quantità limitata di dati. Dal momento che il comportamento di un'IA, per quanto avanzata, è molto diverso da quello di un giocatore umano, questa soluzione va a diminuire la solidità scientifica dei risultati ottenuti. Per ovviare a questo problema, abbiamo sviluppato un *framework open-source* per la raccolta di dati online da utenti reali, tramite un gioco FPS usufruibile da browser.

Abbiamo anche tentato un nuovo approccio alla generazione procedurale di contenuti, sviluppando uno strumento che utilizza la Teoria dei Grafi per disporre punti di respawn e risorse di vario tipo in una mappa generata proceduralmente. Abbiamo infine usato il nostro framework per validare questo strumento tramite una raccolta di dati online.

Thanks

I would like to thank Assistant Professor Daniele Loiacono, that supported me during the long six months that led to the completion of this work.

Thank also to my whole family and to my colleague and friend Luca, essential companion in this journey.

Finally, I would like to thank Politecnico di Milano itself, of which I can call myself a proud student.

Marco Ballabio

Contents

Abstract	iii
Sommario	v
List of figures	ix
List of tables	xi
1 Introduction	1
1.1 Motivations and purpose	2
1.2 Synopsis	2
2 State of the art	5
2.1 Level Design Theory	5
2.2 Procedural Content Generation	7
2.3 Procedural Content Generation for FPS maps	9
2.4 History of Level Design in FPSes	12
2.4.1 Level Design evolution in FPSes	13
2.5 Graph Theory in video games	16
2.6 Summary	16

List of Figures

2.1	Visual representation of Ølsted et al.[1] generative process. . .	11
2.2	One of the maps evolved by Cachia's et al.[2] algorithm. . . .	12
2.3	A common pathfinding process.	16

List of Tables

Chapter 1

Introduction

Video games are really complex products, but it is rather simple to point out three elements that mainly influence their commercial success: *visuals*, **gameplay**¹ and *narrative*. If in the past visual improvements were impressively fast, with games looking more and more realistic from year to year, lately this progress consistently slowed down, leaving narrative and gameplay as the main selling points. Since video games are interactive products, the latter is the one that influences user experience the most. Gameplay is defined by a set of rules commonly referred as *game design*. To the player, game design is presented in a tangible way via *level design*, which consists in the creation of the worlds where the game takes place. This is a critical component, since an inadequate level design can easily compromise the whole experience.

One of the most successful video game genre is the one of **First Person Shooters**, that thanks to its first player perspective allows the user to experiment a complete immersion in the game world. From the very beginning, this has required a close attention to level design, that underwent a constant evolution, up to the stable situation of the recent years. Furthermore, the ever-increasing success of competitive multiplayer added a new level of complexity to the creation of maps, that need to support different game modes, play styles and interactions, allowing a fun and challenging gameplay to arise naturally.

¹The specific way in which players interact with the game.

1.1 Motivations and purpose

Despite the importance of level design for the FPS genre, the video game industry has never attempted a scientific approach to this field. Consequently, game design is a rather abstract discipline, with no common vocabulary or well-defined standards, but rather based on the experience of who is working in this field from many years. This affects also the related literature, that is confined to listing the most used patterns and conventions, without focusing on why they work.

In the last years, instead, academic environments started to address this discipline with increasing interest. The researches performed in this field revolve around the identification and definition of design patterns and design techniques, with a deep analysis of how and why they work, and to the creation of novel approaches to level design. Some of these techniques try to automate the design process by employing *procedural generation*, often combined with *evolutionary algorithms*.

These methods have achieved interesting results, but they are often criticized for employing matches played by *artificial agents* as a *validation method*. Since the behavior of an AI, no matter how advanced, is way less complex than the one of a human player, this approach impairs the scientific value of the final results. Nevertheless, researchers are forced to use AI to fasten up their experiment, because organizing play-test sessions requires too much time and resources.

The aim of this thesis is to solve this problem, by introducing an open-source *framework* capable of deploying online experiments to collect data from real users via a browser FPS game. Using this framework, we also explore the possibility of using *Graph Theory* to populate procedural generated maps with spawn-points and various kinds of resources.

1.2 Synopsis

The contents of the thesis are the followings:

In the second chapter we describe the state of the art of first person shooters, both in academic research and in commercial games, paying attention on how level design practices and procedural content generation are applied in this genre. We also list some examples of how Graph Theory is employed in video games.

In the third chapter we present the framework that we have developed, analyzing its features and its overall structure.

In the fourth chapter we present a tool that uses Graph Theory to place resources in procedurally generated levels, with an overview of the theory and the assumptions behind it.

In the fifth chapter we describe an experiment performed with our framework aimed at validating the framework itself and the tool described in the previous chapter.

In the concluding chapter we evaluate the obtained results and we analyze the potential future developments of this work.

Chapter 2

State of the art

In this chapter we analyze the current state of *Level Design* and of its common practices, both in academic and in professional environments, with attention to the genre of *First Person Shooters* (or *FPS*).

We then talk about *Procedural Content Generation* (or *PCG*), focusing on how it allows to enrich and ease the design process.

After that, we give an overview of the First Person Shooter genre, analyzing its features, history and evolution, devoting special attention to the games that lead to greater innovation in the field and to the ones that are used to perform academic research in this field.

Finally, we analyze how Graph Theory has been in used in Video Games during the years.

2.1 Level Design Theory

Level Design is a game development discipline focused on the creation of video game levels.

Today, the level designer is a well-defined and fundamental figure in the development of a game, but it was not always so. In the early days of the video game industry, it was a widespread practice to assign the development of levels to members of the team with other roles, usually programmers. Apart from the limited number of team members and budget, this was because there were no tools such *level editors*¹, that allowed the level designer to work on a level without being involved with code.

¹A level editor is a software used to design levels, maps and virtual worlds for a video game. An individual involved with the creation of game levels is a level designer.

The level designer has a really significant role in the development of a good game, since he is responsible for the creation of the world and for how the player interacts with it. The level designer takes an idea, which is the game design, and makes it tangible. Despite the importance of this role, after all this years, it has not been established a common ground or a set of standards yet, instead, level design is often considered as a form of art, based on heuristics, observation, previous solutions and personal sensibility.

In addition to game play, the game designer must consider the visual appearance of the level and the technological limitations of the *game engine*², combining all this elements in a harmonic way.

One of the core components of level design is the **"level flow"**. For single player games it translates into the series of actions and movements that the player needs to perform to complete the level. A proficient level design practice is to guide the player in a transparent way, by directing his attention towards the path he needs to follow. This can be achieved in diverse ways. Power ups and items can be used as breadcrumbs to suggest the right direction in a one-way fashion, since they disappear once picked up. Lighting, illumination and distinctly colored objects are another common approach to this problem. A brilliant example of this is *Mirror's Edge*³, which uses a really clear color code, with red interactive objects in an otherwise white world, to guide the player through its fast-paced levels. There are also even more inventive solutions, like the dynamic flock of birds in *Half Life 2*⁴, used to catch the player attention or to warn him of incoming dangers[3]. Finally, sounds and architectures are other elements that can be used to guide the player. In the academic environment, a lot of researchers have analyzed the effectiveness of this kind of solutions: Alotto[4] considers how architecture influences the decisions of the player, whereas Hoeg[5] also considers the effect of sounds, objects and illumination, with the last being the focus of Brownmiller's[6] work.

In multiplayer games the level flow is defined by how the players interact with each other and with the environment. Because of this, the control of the level designer is less direct and is exercised almost exclusively by modeling the map. Considering FPSes, the level flow changes depending on how much an area is attractive for a player. The more an area is easy to navigate or offers tactical advantage, such as cover, resources or high ground, the more players will be comfortable moving in it. This doesn't mean that

²A game engine is a software framework designed for the creation and development of video games.

³Digital Illusions CE, 2008.

⁴Valve, 2004.

all areas need to be designed like this, since zones with a "bad" flow but an attractive reward, such as a powerful weapon, force the player to evaluate risks and benefits, making the game play more engaging. The conformation of the map and the positioning of interesting resources are used to obtain what Güttler et al.[7] define as "**points of collisions**", i.e. zones of the map where the majority of the fights are bound to happen. Moving back to academic research, Güttler et al. have also noticed how aesthetic design loses importance in a multiplayer context. Other researches are instead focused on finding **patterns** in the design of multiplayer maps: Larsen[8] analyzes three really different multiplayer games, *Unreal Tournament 2004*⁵, *Day of Defeat: Source*⁶ and *Battlefield 1942*⁷, identifying shared patterns and measuring their effect on gameplay, suggesting some guidelines on how to use them, whereas Hullet and Whitehead identify some patterns for single player games[9], many of whom are compatible with a multiplayer setting, with Hullett also proving cause-effect relationships for some of these patterns by confronting hypnotized results with the ones observed on a sample of real players[10]. Despite these experimental results contributing to a formalization of level design, we are still far from a structured scientific approach to the subject.

2.2 Procedural Content Generation

Procedural Content Generation refers to a family of algorithms used to create data and content in an automatic fashion. In game development it is commonly used to generate weapons, objects, maps and levels, but it is also employed for producing textures, models, animations, music and dialogues.

The first popular game to use this technique was *Rogue*⁸, an ASCII dungeon exploration game released in 1980, where the rooms, hallways, monsters, and treasures the player was going to find were generated in a pseudo-random fashion at each playthrough. Besides providing a huge replay value to a game, PCG allowed to overcome the strict memory limitations of the early computers. Many games used pseudo-random generators with predefined *seed values* to create very large game worlds that appeared to be premade. For instance, the space exploration and trading game *Elite*⁹ contained only eight galaxies, each one with 256 solar systems, of the possible

⁵Epic Games, 2004.

⁶Valve, 2005.

⁷DICE, 2002.

⁸Michael Toy, Glenn Wichman, 1980.

⁹David Braben, Ian Bell, 1984.

282 trillion the code was able to generate, since the publisher was afraid that such an high number could cause disbelief in the players. Another example is the open world action role-playing game *The Elder Scrolls II: Daggerfall*¹⁰, which game world has the same size as Great Britain.

As computer hardware advanced and CDs become more and more capacious, procedural generation of game worlds was generally put aside, since it could not compete with the level of detail that hand-crafted worlds were able to achieve.

However, in the last years, with the players' expectations and the production value of video games constantly increasing, procedural generation made a comeback as a way to automate the development process and reduce costs. Many *middleware* tools, as *SpeedTree*¹¹ and *World Machine*¹², are used to produce content, like terrain and natural or artificial environments.

Many modern AAA¹³ games use procedural generation: in *Borderlands*¹⁴ a procedural algorithm is responsible for the generation of guns and other pieces of equipment, with over a million unique combinations; in *Left 4 Dead*¹⁵ an artificial intelligence is used to constantly make the players feel under threat, by dynamically changing the music, spawning waves of enemies and changing the accessible paths of the level; in *Spore*¹⁶ *procedural animation* is employed to determine how the creatures created by the player move.

Nowadays, PCG is widely used by *independent* developers, that, lacking the high budgets of AAA games, try to obtain engaging and unusual gameplay using unconventional means. The most famous example is *Minecraft*¹⁷, a sandbox survival game which worlds, composed exclusively by cubes, are generated automatically. Currently, the most extreme form of procedural generation is the one found in *No Man's Sky*¹⁸, a space exploration game, where space stations, star-ships, planets, trees, resources, buildings, animals, weapons and even missions are generated procedurally. Following in the footsteps of their forefather, many roguelike games still use PCG, like

¹⁰Bethesda Softworks, 1996.

¹¹IDV, Inc.

¹²World Machine Software, LLC.

¹³Video games produced and distributed by a major publisher, typically having high development and marketing budgets.

¹⁴Gearbox Software, 2009.

¹⁵Valve, 2008.

¹⁶Maxis, 2008.

¹⁷Mojang, 2011.

¹⁸Hello Games, 2016.

*The Binding of Isaac*¹⁹.

All the algorithms used by these games and middleware are design to be as fast as possible, since they need to generate the content in real time. In the last years researchers have nevertheless tried to explore new paradigms, creating more complex procedural generation techniques, that allow for a tighter control on the output. Being one of the problems of PCG the lack of an assured minimum quality on the produced content, the academic environment has focused not only on more advanced generation algorithms, but also on techniques to evaluate the output itself in an *automatic* fashion. In this field, Togelius et al.[11] defined *Search-Based Procedural Content Generation*, a particular kind of *Generate-And-Test*²⁰ algorithm, where the generated content, instead of being just accepted or discarded, is evaluated assigning a suitability *score* obtained from a *fitness function*, used to select the best candidates for the next iterations.

2.3 Procedural Content Generation for FPS maps

We have really few examples of commercial FPSes that use PCG to generate their maps: with the exception of *Soldier of Fortune II: Double Helix*²¹, that employs these techniques to generate whole missions, the few other cases we have are all roguelikes with a FPS gameplay, like *STRAFE*²².

Despite the total lack of FPSes using procedural generation to obtain multiplayer maps, researchers have proved that search-based procedural content generation can be an useful tool in this field. This method has been applied for the first time by Cardamone et al.[12], who tried to understand which kind of *deathmatch*²³ maps created the most enjoyable gameplay possible. To achieve this, the authors generate maps for *Cube 2: Sauerbraten*²⁴ by maximizing a fitness function computed on *fight time* data collected from *simulations*²⁵, with the fight time being the time between the start of a fight

¹⁹Edmund McMillen, 2011.

²⁰Algorithms with both a generation and an evaluation component, that depending on some criterion, decide to keep the current result or to generate a new one.

²¹Raven Software, 2002.

²²Pixel Titans, 2017.

²³A widely used multiplayer game mode where the goal of each player is to kill as many other players as possible until a certain end condition is reached, commonly being a kill limit or a time limit.

²⁴Wouter van Oortmerssen, 2004

²⁵In the field of search-based procedural generation, fitness function based on simulation are computed on the data collected from a match between artificial agents in the map at issue. They differ from *direct* and *interactive* functions, that evaluate, respectively, the

and the death of one of the two contenders. The choice of this fitness function is based on the consideration that a long fight is correlated to the presence of interesting features in the map, such as escape or flanking routes, hideouts and well positioned resources.

Stucchi[13], yet remaining in the same field, attempted a completely different use of procedural generation, by producing balanced maps for player with different weapons or different levels of skill. For doing so, he generates procedural maps via evolutionary algorithms, evaluating them with a fitness function based on simulation that computes the entropy of kills. Starting from a situation where one of the two players has a significant advantage, Stucchi is able to prove that changes in the map structure allow to achieve a significant balance increase.

Arnaboldi[14] combined these two approaches, creating a framework that automatically produces maps using a genetic process like the one of Cardamone. In Arnaboldi work, however, the fitness function is way more complex, since it considers a high number of gameplay metrics, and the AI of the *bots*²⁶ is closer to the one of a human player, thanks to a series of adjustments made to the stock *Cube 2* one. These improvements significantly increase the scientific accuracy and the overall quality of the output, allowing to identify and analyze some recurring patterns and their relationship with the statistics gathered during the simulation.

Ølsted et al.[1] moved the focus of their research from deathmatch to squad game modes with specific objectives, sustaining not only that the maps generated by Cardamone et al. are not suitable for this kind of gameplay, but also that they do not satisfy what they define as *The Good Engagement* (or *TGE*) rules, a set of rules that a FPS should satisfy to support and encourage interesting player choices, from which an engaging gameplay should emerge naturally. By analyzing the *Search & Destroy*²⁷ mode of games like *Counter Strike*²⁸ and *Call of Duty*²⁹, they defined a process to generate suitable maps: starting from a grid, some nodes are selected and connected among them, the result is then optimized to satisfy the TGE rules and finally rooms, resources, objects and spawn points are added, as can be seen in Figure 2.1. Opting for an *interactive* approach, the fitness function used to guide the evolution of these maps is computed on the binary ap-

generated content and the interaction with a real player.

²⁶The artificial players of a video game.

²⁷A multiplayer game mode where players, divided in two teams, have to eliminate the enemy team or detonate a bomb in their base.

²⁸Valve Software, 2000

²⁹Infinity Ward, 2003

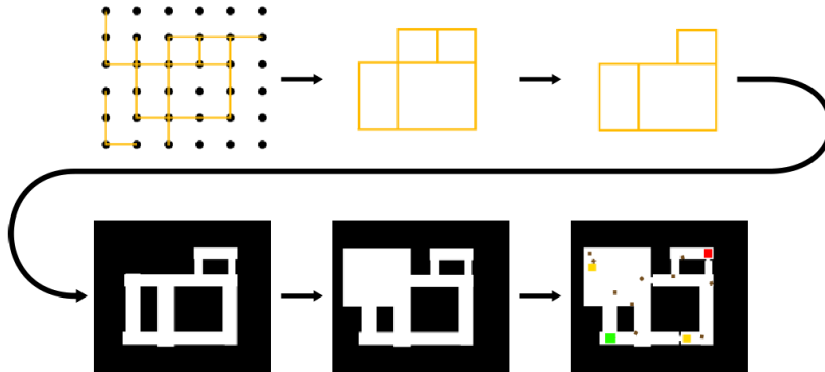


Figure 2.1: Visual representation of Ølsted et al.[1] generative process.

preciation feedback expressed by real users, since the authors consider bot behavior too different from the one of real users.

A completely different approach from the ones listed above is the one of Anand and Wong[15], who employed search-based procedural generation to create *online*, automatically and rapidly multiplayer maps for the *Capture and Hold*³⁰ game mode, without compromising the quality of final output. To achieve this, they employ a genetic approach, which fitness function is evaluated directly on the topology of the map, considering four different factors: the connectivity between regions, the number of points of collision, the balancing in the positioning of control points and spawn points. With no need to simulate matches, this process can be completed in a matter of seconds. The algorithm starts by generating three maps, that are then evolved by mutation. To obtain the initial maps, Anand and Wong populate a grid with random tiles, they clean it of undesired artifacts and they identify regions within it, that are then populated with strategic points, resources, spawn points and covers. Despite its good results, this approach is not sound enough on a scientific stand point, since it directly depends on the validity of the selected topological metrics and, as we have seen, it is still not clear which the good elements of a level are.

Finally, Cachia et al.[2] extended search-based procedural generation to multi-level maps, generating the ground floor with one of the methods

³⁰A multiplayer game mode where players, divided in two teams, fight for the control of some strategic areas. The score of each team increases over time proportionally to the number of controlled points until one of the two teams reaches a given limit, winning the game.

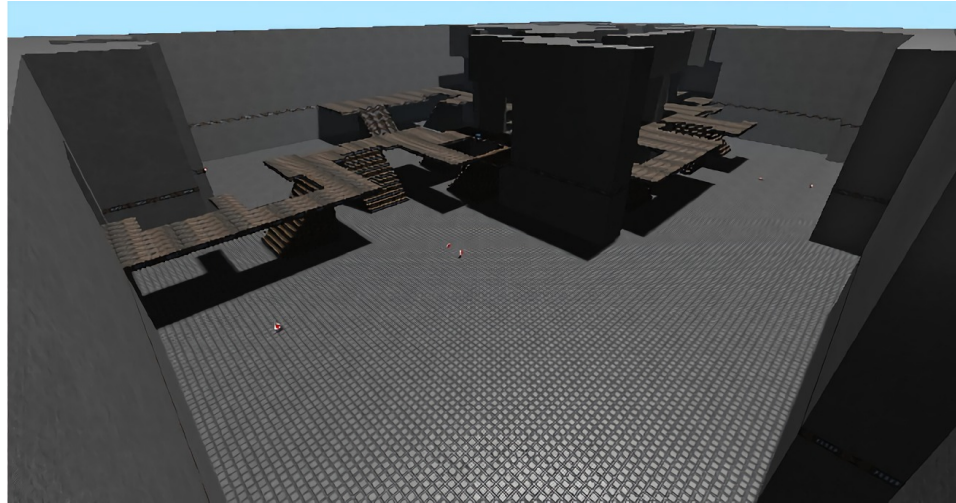


Figure 2.2: One of the maps evolved by Cachia's et al.[2] algorithm.

defined by Cardamone and employing a random digger for the first floor. The final result can be seen in Figure 2.2. Their algorithm also positions spawn points and resources through a topological fitness function, which entails the same problems described for Anand and Wong's approach.

2.4 History of Level Design in FPSes

First Person Shooter are a video game genre which main features are the first-person player perspective and a weapon-based combat gameplay. During the years this genre has been consonantly evolving, as new elements started to emerge from the very aggressive and fast-paced gameplay of the first games of this kind, like *Doom*³¹. Games like *Half-Life*³² highlighted the importance of the story and of the setting, games like *Deus Ex*³³ introduced role-play and stealth mechanics and games like *Quake III: Arena*³⁴ and *Unreal Tournament*³⁵ moved the focus from single player to multiplayer. Finally, Modern Military Shooters introduced a slower and more realistic gameplay and radically changed the setting from fictional conflicts to contemporary ones.

³¹ID Software, 1993.

³²Valve Software, 1998.

³³Ion Storm, 2000.

³⁴id Software, 1999.

³⁵Epic Games, 1999.

2.4.1 Level Design evolution in FPSes

The radical evolution of the mechanics of this genre was supported by a constant refinement of level design and of the used tools.

Before 1992: The first FPSes

The origin of the FPS genre goes back to the beginning of video games themselves. In 1973, Steve Colley developed *Maze War*, a simple black-and-white multiplayer game set in a tile-based maze, where players would search for other players' avatars, killing them to earn points. Around the same time, Jim Bowery created *Spasim*, a simple first-person space flight simulator. Both games were never released, instead, we must wait the beginning of the 80's to see the first products available to the public. Heavily inspired by Colley and Bowery's work, these games had almost no level design, but during the years they started to become a little more complex, with tangled sci-fi structures taking over mazes.

1992: Wolfenstein 3D defines a new genre

When *Wolfenstein 3D*³⁶ was released in 1992, it changed the genre forever, thanks to its fast gameplay and its light game engine, that allowed to target an audience as wide as possible. Wolfenstein 3D took up the exploitative approach of the period, with its levels full of items, weapons and secret rooms. The level design was still simple, because the technical limitations of the engine and of its *tile-based*³⁷ *top-down*³⁸ level editor allowed to create only flat levels, with no real floor or ceiling and walls always placed at a right angle.

1993 - 1995: Doom and its legacy

A year later, id Software released *Doom*, a milestone in the history of the genre. The game engine of Doom was capable of many innovations: sections with floor and ceiling with variable height, elevators, non-orthogonal walls, interactive elements, lightning, even dynamic, textures for horizontal

³⁶id Software, 1992.

³⁷The map consists in a grid composed by squared cells, or *tiles*, of equal size.

³⁸In *top-down* games and editors, the game world is seen from above.

surfaces and even a simple *skybox*³⁹, all of this without losing the speed that characterized Wolfenstein. The developers took advantage as much as possible of the capabilities of the engine, achieving a level design way more complex than what had been seen before. In addition, Doom provided the users with *WADs*, a tool to create levels and mod the game, and it featured cooperative and deathmatch multiplayer, via LAN or dial-in connections, that rapidly gathered a massive user base.

The impact of Doom on the genre was so strong, that in the following years the market was flooded with its clones. All these games, as well as Doom, had still some technical limits, in their engines, that were not completely 3D, in their level editors, that were still top-down and didn't allow for the design of more complex levels, and in their gameplay, that still faced limited movements.

1996 - 2000: A constant evolution

In the next years, many games continued what Doom started, bringing constant improvements to the genre. *Duke Nukem 3D*⁴⁰ set aside the sci-fi settings to its predecessors, switching to real locations, inspired by the ones of Los Angeles. This was possible thanks to its *2.5D*⁴¹ engine *Build*⁴², that provided a *What You See Is What You Get*⁴³ level editor. Furthermore, Build allowed to apply *scripts* to certain elements of the map, resulting in a more interactive environment.

Released in 1996, *Quake*⁴⁴ was one of the first and most successful FPSes with a real 3D engine, that allowed an incredible jump forward in terms of realism, level design and interactivity. Quake had also a rich multiplayer, with a lot of maps, game modes and special features, like clans and modding. Two years later, *Unreal*⁴⁵ brought a new improvement in terms of realism

³⁹A method of creating backgrounds that represent scenery in the distance, making the game world look bigger than it really is.

⁴⁰3D Realms, 1996.

⁴¹A *2.5D* engine renders a world with a two dimensional geometry in a way that looks three-dimensional. An additional height component can be introduced, allowing to render different ceiling and floor height. This rendering technique limits the movements of the camera only to the horizontal plane. Doom and many similar games employed this technology.

⁴²Developed by Ken Silverman in 1995.

⁴³In computer science, *What You See Is What You Get* denotes a particular kind of editors where there is no difference from what you see during editing and the final output.

⁴⁴id Software, 1996.

⁴⁵Epic Games, 1998.

and level design, thanks to its engine capable of displaying huge outdoors settings.

In those years many new sub-genres started to spawn, obtained by emphasizing certain features of the previous games or by borrowing mechanics from other genres. *Quake III Arena*⁴⁶ and *Unreal Tournament*⁴⁷ were some of the first and most successful multiplayer games ever released, that required a new approach to level design, completely focused on the creation of competitive maps. Games like *Deus Ex* introduced tactical and RPG elements, with the possibility of reaching an objective in multiple ways, thanks to a level design that exalted the freedom left to player. Finally, *Half-Life* changed forever the approach of this genre to storytelling and to level design: the game puts great emphasis on the story, that is narrated from the eyes of the player, without cut-scenes, and introduces the possibility of moving freely between areas, with no interruption. The game also set new standards with its challenging enemy AI, capable of taking advantage of the terrain and coordinating flanking maneuvers.

2001: The rise of console shooters

In 2001, *Halo: Combat Evolved*⁴⁸ revolutionized the genre, introducing some of the mechanics on which modern FPSes are based, as the limited amount of weapons that the player can carry and the regeneration of health over time. This slower and more strategic approach to gameplay matched perfectly with consoles and their twin-stick-controllers, that weren't suitable for the extremely fast paced action of the past. Over time, this new gameplay overshadowed almost completely all the other approaches, thanks to the diffusion of consoles and to the increase of production costs, that made PC exclusives economically disadvantageous. From the standpoint of level design, this change required to increase the complexity of the levels and the addition of strategically placed covers.

Today: A time of stagnation

Starting from its origins, level design undergone a radical evolution, but in the last years it has shown no significant improvements. This could be due to the considerable risk associated with modern projects or to the lack

⁴⁶id Software, 1999.

⁴⁷Epic Games, 1999.

⁴⁸Bungie, 2001.

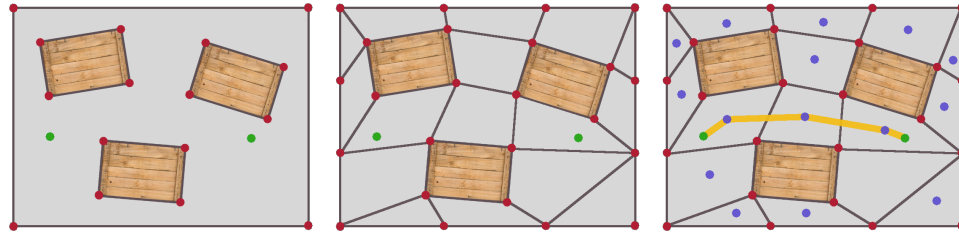


Figure 2.3: A common pathfinding process.

of suitable instruments.

2.5 Graph Theory in video games

Graph Theory has always been used in video games, usually as a useful tool to perform *pathfinding* for artificial agents. These techniques revolve around the creation of a *navigation mesh*, i.e. a representation of the walkable areas of a level using non-overlapping polygons obtained by removing the shapes of obstacles from the considered surface. The result is then used to generate a graph, selecting as nodes the vertices or the centers or the centers of edges of the obtained polygons, depending on the kind of movement that must be achieved. This graph can be pre-generated or computed at run-time, if the technique is applied to dynamic environments. Finally, an algorithm like A^* is employed to find the shortest path between two points. This process can be seen in Figure 2.3

Graphs are also often used in procedural generation, as an effective tool to model landmasses and roads.

2.6 Summary

In this chapter we analyzed the current state of level design for first person shooter games and how this field has been explored in academic research. We then introduced Procedural Content Generation and we observed how some studies have proved that it is a suitable method to produce FPS maps. We also took a brief look at the history of first person shooters, analyzing how level design evolved over time. Finally, we depicted some of the most common uses of Graph Theory in video games.

Bibliography

- [1] B. M. Peter Ølsted, “Interactive evolution levels for a competitive multiplayer fps. making players do the level designer’s job,” 2014.
- [2] W. Cachia, A. Liapis, and G. N. Yannakakis, “Multi-level evolution of shooter levels,” 2015.
- [3] M. Gallant, “Guiding the player’s eye,” May 2009.
- [4] B. Alotto, “How level designers affect player pathing decisions: Player manipulation through level design,” 2007.
- [5] T. Hoeg, “The invisible hand: Using level design elements to manipulate player choice,” 2008.
- [6] J. Brownmiller, “In-game lighting and its effect on player behavior and decision-making,” 2012.
- [7] C. Güttler and T. D. Johansson, “Spatial principles of level-design in multi-player first-person shooters,” in *Proceedings of the 2Nd Workshop on Network and System Support for Games*, NetGames ’03, (New York, NY, USA), pp. 158–170, ACM, 2003.
- [8] S. Larsen, “Level design patterns,” 2006.
- [9] K. Hullett and J. Whitehead, “Design patterns in fps levels,” in *Proceedings of the Fifth International Conference on the Foundations of Digital Games*, FDG ’10, (New York, NY, USA), pp. 78–85, ACM, 2010.
- [10] K. M. Hullett, “The science of level design: Design patterns and analysis of player behavior in first-person shooter levels,” 2012.

- [11] J. Togelius, G. N. Yannakakis, K. O. Stanley, and C. Browne, “Search-based procedural content generation,” in *Applications of Evolutionary Computation* (C. Di Chio, S. Cagnoni, C. Cotta, M. Ebner, A. Ekárt, A. I. Esparcia-Alcazar, C.-K. Goh, J. J. Merelo, F. Neri, M. Preuß, J. Togelius, and G. N. Yannakakis, eds.), (Berlin, Heidelberg), pp. 141–150, Springer Berlin Heidelberg, 2010.
- [12] L. Cardamone, G. N. Yannakakis, J. Togelius, and P. L. Lanzi, “Evolving interesting maps for a first person shooter,” in *Proceedings of the 2011 International Conference on Applications of Evolutionary Computation - Volume Part I*, EvoApplications’11, (Berlin, Heidelberg), pp. 63–72, Springer-Verlag, 2011.
- [13] R. Stucchi, “Evoluzioni di mappe bilanciate per fps con algoritmi evolutivi,” 2013.
- [14] L. Arnaboldi, “Sviluppo di un framework per la progettazione e l’analisi di mappe per first person shooters,” 2015.
- [15] A. Bhojan and H. W. Wong, “Arena - dynamic run-time map generation for multiplayer shooters,” in *Entertainment Computing – ICEC 2014* (Y. Pisan, N. M. Sgouros, and T. Marsh, eds.), (Berlin, Heidelberg), pp. 149–158, Springer Berlin Heidelberg, 2014.