

Additional Experimental Result

March 2026

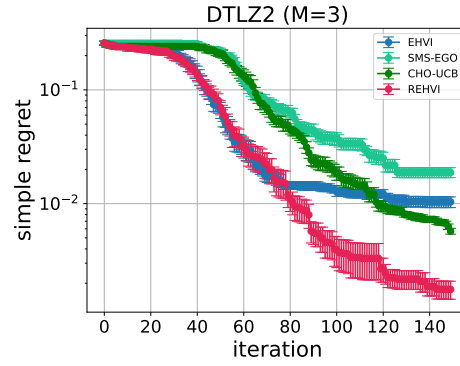


Figure 1: DTLZ2 with 6D input and 4 objectives: REHVI and CHO-UCB perform well relative to their base methods.



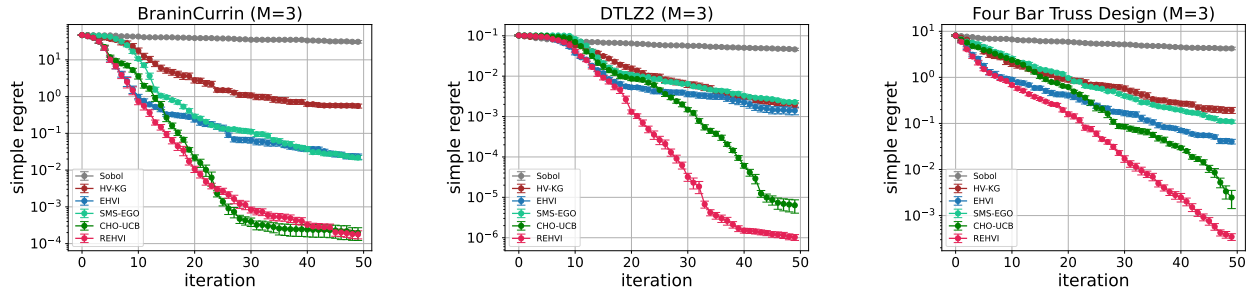



Figure 2: HV-KG experiments show that it does not outperform the proposed methods.

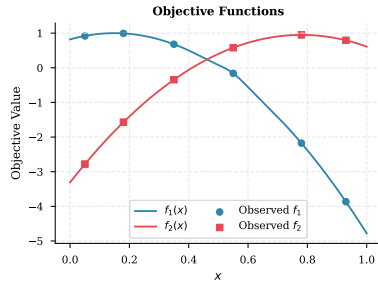

(a) Underlying Objective Functions

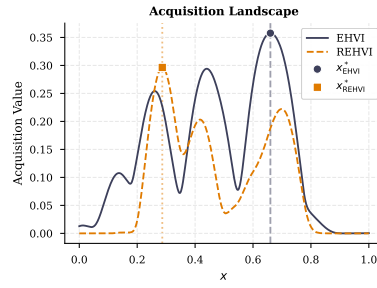

(b) Acquisition Functions

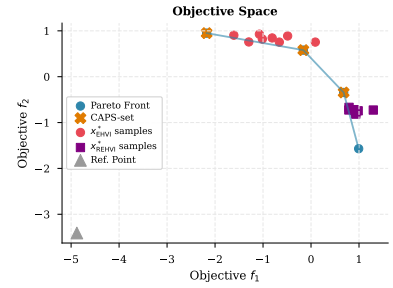

(c) EHVI vs REHVI

Figure 3: Illustration of EHVI and REHVI acquisition functions on a bi-objective toy problem: objective landscapes, acquisition values, and resulting candidate solutions in objective space.