

# Notes for Cryptography

Jing LI  
pkuyplijng@gmail.com

September 19, 2016

*Sincere gratitude to Professor Dan Boneh  
for offering such a wonderful course.*

# Contents

<b>1</b>	<b>Introduction</b>	<b>1</b>
1.1	Course Overview . . . . .	1
1.2	What is Cryptography . . . . .	2
1.3	History of Cryptography . . . . .	3
1.4	Discrete Probability . . . . .	4
<b>2</b>	<b>Stream Ciphers</b>	<b>5</b>
2.1	OTP and Perfect Secrecy . . . . .	5
2.2	Stream Ciphers . . . . .	6
2.3	Attacks on OTP and Stream Ciphers . . . . .	7
2.3.1	Two Time Pad . . . . .	7
2.3.2	No Integrity . . . . .	8
2.4	PRG Security . . . . .	8
2.5	Semantic Security . . . . .	9
<b>3</b>	<b>Block Ciphers</b>	<b>11</b>
3.1	Overview . . . . .	11
3.2	Data Encryption Standard (DES) . . . . .	12
3.2.1	Feistel Network . . . . .	12
3.2.2	DES Round Function . . . . .	14
3.3	Attacks on DES . . . . .	15
3.3.1	Exhaustive Search Attack . . . . .	15
3.3.2	Side Channel Attacks . . . . .	16
3.3.3	Fault Attack . . . . .	16
3.3.4	Linear/Differential Attacks . . . . .	16
3.3.5	Quantum Attacks . . . . .	17

# Chapter 1

## Introduction

### 1.1 Course Overview

The main objectives of this course are

- Learn how cryptographic primitives work;
- Learn how to use them correctly and reason about security.

By the end of the course we will be able to reason about the security of cryptography constructions and break ones that are not secure.

Cryptography is used everywhere.

**Secure communication** Web traffic: https. Wireless traffic: 802.11i WPA2, GSM, Bluetooth.

**Encrypting files on disk** EFS, TrueCrypt

**Content protection(e.g. DVD, blue ray)** CSS(Content Scrambling System), AAC

#### User authentication

Secure communication is concerned about a laptop “Alice” trying to communicate with a web server “Bob”<sup>1</sup>. The protocol used is HTTP, or to say SSL(Secure Sockets Layer)/TLS(Transport Layer Security). The goal is to make sure that as data travels across the network, an attacker can neither eavesdrop on or tamper the data. It consists of two parts:

- Handshake protocol: establish a shared secret key using public-key cryptography;
- Record layer: transmit data using this shared secret key, with confidentiality and integrity ensured.

---

<sup>1</sup>Alice and Bob are two nicknames that will be used in the course

Storing encrypted files on disk is actually logically the same as protecting communication: encrypting files on disk is essentially securing the communication between “Alice today” and “Alice tomorrow”.

The building block of secure communication is symmetric encryption. A message  $m$  is encrypted by a cipher using a shared key  $k$  into a cipher text  $c = E(k, m)$ , and this cipher text is deciphered back to the message:  $m = D(k, c)$ . The encryption algorithm  $E$  and the decryption algorithm  $D$  are publicly known. Proprietary ciphers should not be used for security reasons.

We will discuss two use cases of symmetric encryption. A single use key is used to encrypt only one message, while a multi use key is used to encrypt multiple messages.

Cryptography is a tremendous tool serving as the basis for many security mechanisms. Nonetheless, it is not the solution to all security problems. Software bugs can cause security problems unsolvable using cryptography. Neither can cryptography prevent us from social engineering attacks. Moreover, cryptography is not reliable unless implemented and used properly. It is not something we try to invent ourselves.

## 1.2 What is Cryptography

As stated in the previous section, the core of cryptography consists of two steps: secret key establishment and secure communication using the secret key. But cryptography does much more than that. We will provide a few examples here.

### Digital Signature

Digital signature is the analog of the signature in the physical world. In the digital world, signatures cannot be the same for different documents. Rather, digital signature is a function of the content being signed. Simply copying the signature on one document onto another one will result in failure of verification.

### Anonymous Communication

Anonymous communication over the Internet can be established with a commonly used mechanism called “mix net”. Bob has no idea whom he is talking to when Alice contacts him anonymously, yet he can still send responses to Alice.

### Anonymous Digital Cash

The use of digital cash is concerned with two problems: how to spend a “digital coin” without anyone knowing who I am, and how to prevent double spending. There seems to be a paradox between anonymity and security. Roughly speaking, anonymous digital cash is used in such a way that when used once, no one knows who used it, whilst once used twice, the identity of the user gets exposed.

## Protocols

In an election, we may hope to design a system that reveals the winner of the election without exposing individual voting choices. In a private auction, it is ideal that only the winner and the 2<sup>nd</sup> highest bid is outputted by the auction center. These are actually examples of a more general problem called secure multi-party computation. It aims at calculating a target function  $f(x_i)$  without exposing individual inputs  $x_i$ .

## “Crypto Magic”

Privately outsourcing computation: send an encrypted query to Google, and Google can compute on the encrypted query and send back results without knowing content of the query.

Zero knowledge proof: convince someone else that we have solved a problem without exposing the solution to him.

Cryptography is a rigorous science. Every concept that we will describe is going to follow three steps:

1. Precisely specify the threat model;
2. Propose a construction;
3. Prove that breaking the construction under the threat model is equivalent to solving an underlying hard problem.

## 1.3 History of Cryptography

We will provide a few historical ciphers, all of which are now badly broken.

### Substitution Cipher

Cipher a piece of text by substituting each letter with another letter, i.e. encrypt messages by shuffling the alphabet. An example of substitution cipher is the Caesar cipher. It shifts the alphabet by 3 positions, i.e.  $a \rightarrow d, b \rightarrow e$ , etc.

There are  $26!$  possible keys for a substitution cipher, which is a fairly large key space. However it can be easily broken with letter frequencies. Being vulnerable to the worst possible attack, namely a cipher text only attack, it should not be the choice of any serious secure communication.

### Vigenere Cipher

A cipher dating back to 16<sup>th</sup>-century Rome. Given a key word, for example “crypto”. Repeat the word enough times until reaching the length of the message, then add the long key with the message numerically to obtain the cipher text. It can also be broken with letter frequencies.

### Rotor Machines

A cipher invented during the electric era, i.e. the 19<sup>th</sup> century. The most famous one was the Enigma.

### Data Encryption Standard

A post-WWII cipher with a key space of size  $2^{56}$ , which was large enough then but is too small today.

## 1.4 Discrete Probability

The whole theory of cryptography is built upon the knowledge of discrete probability. This section serves as a quick recap of discrete probability.

Discrete probability is always defined on a finite set called the **universe**. In this course we will always use the set  $U = \{0, 1\}^n$ , i.e. the set of all  $n$ -bit binary strings.

**Definition 1.** A **probability distribution**  $P$  is a function from  $U$  to  $[0, 1]$  such that  $\sum_{x \in U} P(x) = 1$ .

**Definition 2.** A subset of the universe  $A \subseteq U$  is called an **event**. The probability of the event is  $Pr(A) = \sum_{x \in A} P(x) \in [0, 1]$ .

**Definition 3.** A **random variable** is a function  $X : U \rightarrow V$ .  $X$  take values in  $V$  and defines a distribution on  $V$ .

**Definition 4.** Events  $A$  and  $B$  are **independent** if  $Pr(A \wedge B) = Pr(A) \cdot Pr(B)$ .

An important property of XOR will be frequently used in this course.

**Theorem 1. (Property of XOR)** Suppose we have a random variable  $Y$  and a uniform variable  $X$  independent from  $Y$  on  $\{0, 1\}^n$ , then the XOR of  $X$  and  $Y$   $Z := X \oplus Y$  is a uniform variable on  $\{0, 1\}^n$ .

The birthday paradox is an interesting topic that we will talk about in detail later.

**Theorem 2. (The Birthday Paradox)** Let  $r_i \in U (i = 1, \dots, n)$  be independent identically distributed variables. If  $n \geq 1.2 \times |U|^{1/2}$ , then

$$Pr(\exists i \neq j \text{ s.t. } r_i = r_j) \geq \frac{1}{2}.$$

## Chapter 2

# Stream Ciphers

First we would like to provide a precise definition for symmetric ciphers.

**Definition 5. (*Symmetric Cipher*)** A **cipher** defined over  $(\mathcal{K}, \mathcal{M}, \mathcal{C})$ , in which  $\mathcal{K}$  is the set of all possible keys,  $\mathcal{M}$  is the set of all possible messages and  $\mathcal{C}$  is the set of all possible cipher texts, is a pair of efficient algorithms  $(E, D)$  in which the encryption algorithm  $E : \mathcal{K} \times \mathcal{M} \rightarrow \mathcal{C}$  and the decryption algorithm  $D : \mathcal{K} \times \mathcal{C} \rightarrow \mathcal{M}$  satisfy the consistence equation

$$D(k, E(k, m)) = m, \forall k \in \mathcal{K}, m \in \mathcal{M}.$$

In practice,  $E$  is often randomized, while  $D$  is always deterministic.

### 2.1 OTP and Perfect Secrecy

Now we will introduce our first example of a secure cipher, namely **the one time pad**. In this case, we have  $\mathcal{K} = \mathcal{M} = \mathcal{C} = \{0, 1\}^n$ . A key is simply a bit string as long as the message to be encrypted. The cipher text is the XOR of the key and the message, i.e.

$$c := E(k, m) = k \oplus m.$$

To decrypt a cipher text, we simply compute the XOR again, i.e.

$$m := E(k, c) = k \oplus c.$$

Since we have  $D(k, E(k, m)) = k \oplus (k \oplus m) = (k \oplus k) \oplus m = 0 \oplus m = m^1$ , obviously the consistence equation is satisfied. Similarly we have  $k = m \oplus c$ .

Now let's explain why OTP is a "good" cipher.

**Definition 6. (*Perfect Secrecy*)** A cipher  $(E, D)$  is said to have **perfect secrecy** if  $\forall m_0, m_1 \in \mathcal{M}$  with equal length and  $\forall c \in \mathcal{C}$ , we have

$$Pr(E(k, m_0) = c) = Pr(E(k, m_1) = c),$$

---

<sup>1</sup>XOR is addition mod 2, thus is associative. Also provable using  $a \oplus b = a \cdot \bar{b} + \bar{a} \cdot b$ .



in which  $k$  is uniform in  $\mathcal{K} : k \xleftarrow{R} \mathcal{K}$ .

This definition means that an attacker cannot tell if the message is  $m_0, m_1$  or any other message with equal length given only the cipher text. Thus nothing can be learnt about the message from the cipher text, and the cipher is safe from CT-only attack.

Since  $k = c \oplus m$  for OTP, we have  $\Pr(E(k, m) = c) = \frac{1}{|\mathcal{K}|}, \forall c, m$ . Hence OTP has perfect secrecy. Nonetheless, the key has to be as long as the message, which makes OTP impractical in actual use.

Unfortunately, it can be proved that a cipher with perfect secrecy must satisfy  $|\mathcal{K}| > |\mathcal{M}|$ , which means the length of the key is at least as long as that of the message. So such ciphers are actually hard to use in practice.

## 2.2 Stream Ciphers

In this section we will try to make OTP practical. The idea is to use a pseudo-random key instead of a random key.

**Definition 7. (PRG)** A **pseudo-random generator** is a function  $G : \{0, 1\}^s \rightarrow \{0, 1\}^n$ , in which  $n \gg s$ .

$\{0, 1\}^s$  is called the **seed space**. A PRG must be efficiently computable by a deterministic algorithm. A **stream cipher** just substitutes the random key in OTP with a pseudo-random key generated by a PRG, i.e. with a random seed  $k \in \{0, 1\}^s$ , we have

$$\begin{aligned} c &= E(k, m) = m \oplus G(k) \\ m &= D(k, m) = c \oplus G(k) \end{aligned}$$

Obviously a stream cipher cannot have perfect secrecy because the seed is much shorter than the message. Thus we need a different notion of security, and the security of a stream cipher depends on the PRG used.

If an attacker is able to compute all bits of  $G(k)$  according to the first  $i$  bits, then the PRG is not safe from CT-only attacks. For example, an email following the SMTP protocol always starts with “from:”, thus the attacker can obtain a prefix of  $G(k)$  according to the cipher text. We should always use **unpredictable PRGs** as defined below.

**Definition 8. (Predictable PRG)** A PRG  $G$  is said to be **predictable** if  $\exists$  efficient algorithm  $A$  and  $i \in [1, n - 1]$  s.t.

$$\Pr \left( A \left( G(k)|_{1, \dots, i} \right) = G(k)|_{i+1} \right) \geq \frac{1}{2} + \epsilon$$

for some non-negligible  $\epsilon$ .

**Definition 9. (Unpredictable PRG)** A PRG is **unpredictable** if it is not predictable.

An example of predictable PRG is the famous **linear congruential generator**. A seed  $r[0]$  is chosen randomly. Then we calculate

$$r[i] = (a \cdot r[i-1] + b) \bmod p$$

in which  $a, b, p$  are parameters. In each iteration a few bits of  $r[i]$  is outputted. This PRG is easy to predict.

A variant is the *random()* in glibc:

$$r[i] = (r[i-3] + r[i-31]) \% 2^{32}$$

and output  $r[i] \gg 1$ . *random()* should never be used for cryptography.

A theoretical notion of negligibility is to view  $\epsilon$  as a function rather than a scalar.  $\epsilon : Z^+ \rightarrow R^+$  is non-negligible if  $\exists d$  s.t.  $\epsilon(\lambda) \geq \frac{1}{\lambda^d}$  is infinitely often, i.e.  $\epsilon$  is larger than  $\frac{1}{\text{polynomial of } \lambda}$  for many  $\lambda$ . On the contrary,  $\epsilon$  is negligible if  $\forall d, \exists \lambda_d$  s.t.  $\epsilon(\lambda) \leq \frac{1}{\lambda^d}, \forall \lambda \geq \lambda_d$ . For instance,  $\frac{1}{2^\lambda}$  is negligible, whilst  $\frac{1}{\lambda^{1000}}$  is non-negligible. As a trick example,

$$\epsilon(\lambda) = \begin{cases} \frac{1}{2^\lambda} & \text{for odd } \lambda \\ \frac{1}{\lambda^{1000}} & \text{for even } \lambda \end{cases}$$

is non-negligible.

## 2.3 Attacks on OTP and Stream Ciphers

### 2.3.1 Two Time Pad

A pad should not be used more than once, otherwise the encrypted messages shall be decrypted easily. Suppose two messages  $m_1, m_2$  are encrypted using the same pad  $PRG(k)$ :

$$c_1 \leftarrow m_1 \oplus PRG(k)$$

$$c_2 \leftarrow m_2 \oplus PRG(k)$$

If an eavesdropper has intercepted the two cipher texts. By calculating their XOR:

$$\begin{aligned} c_1 \oplus c_2 &= (m_1 \oplus PRG(k)) \oplus (m_2 \oplus PRG(k)) \\ &= m_1 \oplus (PRG(k) \oplus PRG(k)) \oplus m_2 \\ &= m_1 \oplus 0 \oplus m_2 = m_1 \oplus m_2 \end{aligned}$$

The English language and the ASCII encoding has enough redundancy so that  $m_1$  and  $m_2$  can be easily decoded from  $m_1 \oplus m_2$ . Examples of the use of two time pads are not rare in the real world. In network traffic, if the same key is used for different sessions, as was the case in MS-PPTP and 802.11b WEP, the encryption will be unsafe. Instead, a new key should be used for each session, which is implemented by TLS. And typically it is not wise to use a stream cipher for disk encryption, because once a file is changed, an attacker can easily know where the change happened.

### 2.3.2 No Integrity

In general, OTP and stream ciphers provide no integrity at all. In other words, they are **malleable**. An attacker can modify the cipher text without being noticed by the receiver. In particular, since  $(m \oplus k) \oplus p = (m \oplus p) \oplus k$ , an attacker can impose a specific effect on the cipher text (i.e. XOR with a specific  $p$ ).

## 2.4 PRG Security

Let  $G : \mathcal{K} \rightarrow \{0, 1\}^n$  be a PRG. We will define what it means when we say that the output of  $G$  on a random key is indistinguishable from the output of a truly random sampler on  $\{0, 1\}^n$ .

**Definition 10. (Statistical Test)** A *statistical test* is an algorithm  $A$  on  $\{0, 1\}^n$  that outputs 0 or 1.

As a few examples:

- $A(x) = 1$  iff  $|\#0(x) - \#1(x)| \leq 10\sqrt{n}$
- $A(x) = 1$  iff  $|\#00(x) - \frac{n}{4}| \leq 10\sqrt{n}$
- $A(x) = 1$  iff  $\max\text{-run-of-}0(x) \leq 10 \log n^2$

**Definition 11. (Advantage)** Let  $G : \mathcal{K} \rightarrow \{0, 1\}^n$  be a PRG and  $A$  be a statistical test. The *advantage* of  $A$  relative to  $G$  is defined as

$$\text{Adv}_{PRG}[A, G] = \left| \Pr_{k \xleftarrow{R} \mathcal{K}} [A(G(k)) = 1] - \Pr_{r \xleftarrow{R} \{0, 1\}^n} [A(r) = 1] \right|.$$

An advantage close to 1 means that  $A$  can distinguish the output of  $G$  from a random choice, whilst an advantage close to 0 means that  $A$  cannot tell the difference. For example, a dummy statistical test that always outputs 0 has 0 advantage for any  $G$ , meaning it cannot distinguish any PRG from random choice.

**Definition 12. (Secure PRG)** A PRG  $G$  is called a *secure PRG* if  $\forall$  efficient statistical test  $A$ ,  $\text{Adv}_{PRG}[A, G]$  is negligible.

Note that the requirement of efficiency of the statistical tests is necessary for this definition to be satisfied. Providing a secure PRG will result in a proof of  $P \neq NP$ , thus we don't know yet if there exist any secure PRGs.

**Theorem 3.** A secure PRG is unpredictable.

---

<sup>2</sup>The expectation of the maximum run of 0 is roughly  $\log n$ .

*Proof.* We will prove its contrapositive, i.e. a predictable PRG is insecure. Recall that a PRG being predictable means the existence of an efficient algorithm  $A$  s.t.

$$\Pr \left( A \left( G(k)|_{1,\dots,i} \right) = G(k)|_{i+1} \right) \geq \frac{1}{2} + \epsilon$$

for a non-negligible  $\epsilon$ . We define a statistical test  $B(X)$  that outputs 1 iff  $A(X|_{1,\dots,i}) = X_{i+1}$ . For a random choice, the  $(i+1)^{th}$  bit is irrelevant from the first  $i$  bits, thus  $\Pr(B(r) = 1) = \frac{1}{2}$ . However  $\Pr(B(G(k)) = 1) \geq \frac{1}{2} + \epsilon$ , hence  $\text{Adv}_{PRG}[B, G] \geq \epsilon$ , which is not negligible and verifies the insecurity of  $G$ .  $\square$

Actually the converse also holds.

**Theorem 4.** *An unpredictable PRG is secure.*

This theorem means that if next-bit predictors cannot distinguish  $G$  from random choice, then no statistical test can.

Finally let's generalize the definition of computationally indistinguishability.

**Definition 13.** *Two distributions  $P_1$  and  $P_2$  over  $\{0, 1\}^n$  are **computationally indistinguishable** if  $\forall$  efficient statistical test  $A$ ,*

$$\left| \Pr_{x \leftarrow P_1} [A(x) = 1] - \Pr_{x \leftarrow P_2} [A(x) = 1] \right|$$

*is negligible. Their relation is denoted as*

$$P_1 \approx_p P_2.$$

According to this definition, a PRG is secure if  $\{k \xleftarrow{R} \mathcal{K} : G(k)\} \approx_p \text{uniform}(\{0, 1\}^n)$ .

## 2.5 Semantic Security

In order to claim that a stream cipher using a secure PRG is secure, we have to define what it means for a stream cipher to be secure. In the context of stream ciphers, we assume that an attacker is only capable of obtaining one cipher text. We introduced the concept of perfect secrecy, and revealed that it is a requirement too high to be met in practice. Perfect secrecy requires that  $\forall m_0, m_1 \in \mathcal{M}$  with equal length, the probability distribution of  $E(k, m_0)$  is the same as that of  $E(k, m_1)$  for  $k \leftarrow \mathcal{K}$ . A looser requirement would be that they be computationally indistinguishable, which is unfortunately still too strict in practice. Instead of putting the requirement upon arbitrary choices of  $m_0$  and  $m_1$ , we only need  $E(k, m_0)$  and  $E(k, m_1)$  to be computationally indistinguishable for  $m_0$  and  $m_1$  that can be exhibited explicitly by an adversary.

Suppose that an adversary  $A$  exhibits two messages  $m_0, m_1 \in \mathcal{M}$  with equal length, and a challenger (the cipher being challenged) takes both messages and outputs the cipher text for one of them:  $c = E(k, m_b)$ , in which  $b$  is either 0 or 1.

The adversary will guess whether the result is the encryption of  $m_0$  or  $m_1$ . Let  $EXP(b)$  represent an experiment in which the encryption of  $m_b$  is outputted, and define  $W_b$  as the event  $EXP(b) = 1$ , i.e. the adversary guessing that  $c$  is the encryption of  $m_1$ .

**Definition 14. (Semantic Security Advantage)** *With the notations above, the **semantic security advantage** of the adversary  $A$  against the cipher is defined as*

$$Adv_{SS}[A, E] = |Pr[W_0] - Pr[W_1]|.$$

Even if only one bit of the plain text can be deduced from the cipher text, the cipher will have SS advantage 1. OTP has SS advantage 0 because  $Pr[W_0] = Pr[W_1]$  always holds due to perfect secrecy.

**Definition 15. (Semantic Security)** *A cipher  $E$  is **semantically secure** if for all efficient  $A$ ,  $Adv_{SS}[A, E]$  is negligible.*

**Theorem 5.** *Given a secure PRG  $G : \mathcal{K} \rightarrow \{0, 1\}^n$ , a stream cipher  $E$  derived from  $G$  is semantically secure.*

*Proof.* We are going to prove the theorem by proving that  $\forall$  semantic security adversary  $A$ ,  $\exists$  PRG adversaries (i.e. a statistical tests)  $B_0, B_1$  s.t.

$$Adv_{SS}[A, E] \leq Adv_{PRG}[B_0, G] + Adv_{PRG}[B_1, G]$$

Since  $Adv_{PRG}[B_b, G]$  is negligible (guaranteed by the security of  $G$ ),  $Adv_{SS}[A, E]$  will be negligible, which indicates the semantic security of  $E$ .

For a PRG adversary  $B$ , we have

$$Adv_{PRG}[B, G] = \left| \Pr_{r \leftarrow \{0,1\}^n} [B(r) = 1] - \Pr_{k \leftarrow \mathcal{K}} [B(G(k)) = 1] \right|.$$

Consider such statistical tests  $B_b$  with a built-in SS adversary  $A$ . When  $A$  exhibits two messages  $m_0, m_1$ , what  $B_b$  does is to use the output of  $A$  for the input  $m_b \oplus y$  as its own output for any input  $y$ , i.e.

$$B_b(y) = A(m_b \oplus y).$$

Hence  $\Pr_{k \leftarrow \mathcal{K}} [B_b(G(k)) = 1] = \Pr_{k \leftarrow \mathcal{K}} [A(m_b \oplus G(k)) = 1] = Pr[W_b]$ . Similarly,  $\Pr_{r \leftarrow \{0,1\}^n} [B_b(r) = 1] = Pr[R_b]$ , in which  $R_b$  is defined similarly as  $W_b$ , but for an OTP. In summary we have

$$Adv_{PRG}[B_b, G] = |Pr[R_b] - Pr[W_b]|.$$

Due to the perfect secrecy of OTP, we have  $Pr[R_0] = Pr[R_1]$ . Thus

$$\begin{aligned} Adv_{SS}[A, E] &= |Pr[W_0] - Pr[W_1]| \\ &= |Pr[W_0] - Pr[R_0] + Pr[R_1] - Pr[W_1]| \\ &\leq |Pr[W_0] - Pr[R_0]| + |Pr[W_1] - Pr[R_1]| \\ &= Adv_{PRG}[B_0, G] + Adv_{PRG}[B_1, G]. \end{aligned}$$

□

## Chapter 3

# Block Ciphers

### 3.1 Overview

Block cipher is a more powerful primitive than stream cipher. As with stream cipher, a block cipher is made up of an encryption algorithm  $E$  and a decryption algorithm  $D$ , both of which take as input a key  $k$ . Both algorithms take as input  $n$  bits, and output  $n$  bits. There are two canonical examples of block ciphers:

**3DES**  $n = 64, k = 168$ ;

**AES**  $n = 128, k = 128/192/256$ .

A block cipher first expands the key  $k$  into  $t$  **round keys**  $k_1, \dots, k_t$ . Then it uses a **round function**  $R(k, m)$  to encrypt the message by sequentially using the round keys and the encryption result in the previous step:  $m_1 = R(k_1, m), m_2 = R(k_2, m_1), \dots, c = R(k_t, m_{t-1})$ . We have  $t = 48$  for 3DES and  $t = 10$  for AES-128.

Typically block ciphers are slower than stream ciphers. But block ciphers are capable of completing some tasks that cannot be done efficiently with stream ciphers.

**Definition 16. (PRF)** A *pseudo random function (PRF)* is a function defined over  $(K, X, Y)$ :

$$F : K \times X \rightarrow Y$$

such that there exists an efficient algorithm to evaluate  $F(k, x)$ .

**Definition 17. (PRP)** A *pseudo random permutation (PRP)* is a function defined over  $(K, X, X)$ :

$$E : K \times X \rightarrow X$$

such that

- There exists an efficient deterministic algorithm to evaluate  $F(k, x)$ ;

- The function  $F(k, \cdot)$  is one-to-one, i.e. it's invertible;
- There exists an efficient inversion algorithm  $D(k, y)$ .

Let  $F : K \times X \rightarrow Y$  be a PRF. Let  $Funs[X, Y]$  represent the set of all functions from  $X$  to  $Y$ , and  $S_F$  represent the set of  $F(k, \cdot)$  with  $k \in K$ . Obviously  $S_F \subseteq Funs[X, Y]$ .

**Definition 18. (Secure PRFs)** We call  $F$  a **secure PRF** if a random function from  $Funs[X, Y]$  is indistinguishable from a random function from  $S_F$ .

From a secure PRF  $F : K \times \{0, 1\}^n \rightarrow \{0, 1\}^n$ , we can easily construct a secure PRG  $G : K \times \{0, 1\}^{nt}$ :

$$G(k) = F(k, 0) \parallel F(k, 1) \parallel \cdots \parallel F(k, t).$$

A great property of this PRG is that it is parallelizable. We will prove its correctness later.

## 3.2 Data Encryption Standard (DES)

In order to specify a block cipher, we need to provide the key expansion mechanism and the round function. DES will be used as an example in this section.

### 3.2.1 Feistel Network

The core idea behind DES is **Feistel network**. Its goal is to build an invertible function  $F : \{0, 1\}^{2n} \rightarrow \{0, 1\}^{2n}$  from  $n$  arbitrary (not necessarily invertible!) functions  $f_1, f_2, \dots, f_d : \{0, 1\}^n \rightarrow \{0, 1\}^n$ . The initial input contains two parts  $R_0$  and  $L_0$ , each  $n$  bits. Then we have

$$\begin{cases} R_i &= L_{i-1} \oplus f_i(R_{i-1}) \\ L_i &= R_{i-1} \end{cases}$$

for  $i = 1, 2, \dots, d$ , as shown in Figure 3.1.  $R_d, L_d$  are taken as the output.

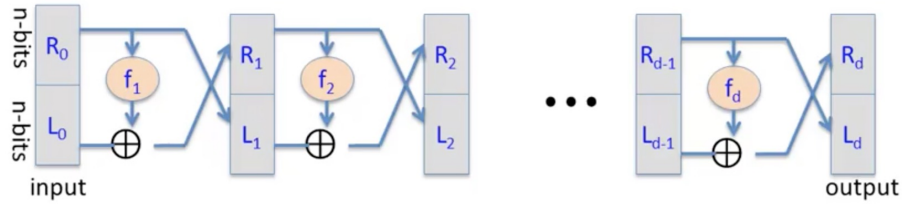


Figure 3.1: Feistel Network

It is easy to construct its inverse:

$$\begin{cases} R_{i-1} &= L_i \\ L_{i-1} &= f(L_i) \oplus R_i \end{cases}$$

for  $i = d, \dots, 1$ . Feistel network is used in many block ciphers, but not in AES.

The following theorem is important in the theory of DES.

**Theorem 6.** *If  $f : K \times \{0, 1\}^n \rightarrow \{0, 1\}^n$  is a secure PRF, then a 3-round Feistel Network (Figure 3.2)  $F : K^3 \times \{0, 1\}^{2n} \rightarrow \{0, 1\}^{2n}$  is a secure PRP.*

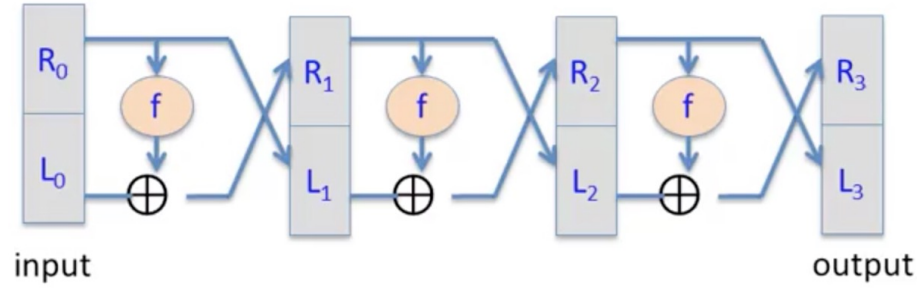


Figure 3.2: 3-Round Feistel Network

The theorem means that if we have a secure PRF at hand, we can construct a secure block cipher.

DES is essentially a 16-round Feistel network. It uses 16 functions  $F(k_i, x) = f_i(x) : \{0, 1\}^{32} \rightarrow \{0, 1\}^{32}, i = 1, \dots, 16$ , as shown in Figure 3.3. IP is an initial permutator not for security reason, but required by the standard, and  $IP^{-1}$  is its inverse. The Feistel network uses 16 48-bit keys expanded from a 56-bit initial key<sup>1</sup>.



Figure 3.3: DES

<sup>1</sup>We won't discuss the key expansion.



### 3.2.2 DES Round Function

Let's now discuss the round function  $F(k_i, x)$ . It carries out the following steps.

1. Pass the 32-bit input  $x$  to an expansion box  $E$ , which expands it to 48 bits  $x'$  by simple replications of bits.
2. Compute  $x' \oplus k_i$  ( $k_i$  is also 48 bits).
3. Break  $x' \oplus k_i$  into 8 6-bit groups.
4. Each 6-bit group goes through an  $S$  box and gets mapped to 4 bits.
5. Gather the 8 4-bit results and use a  $P$  box to permute them into a 32-bit output.

The  $S$  boxes are  $\{0, 1\}^6 \rightarrow \{0, 1\}^4$  functions implemented as lookup tables. Figure 3.4 is an example.

S <sub>5</sub>		Middle 4 bits of input															
		0000	0001	0010	0011	0100	0101	0110	0111	1000	1001	1010	1011	1100	1101	1110	1111
Outer bits	00	0010	1100	0100	0001	0111	1010	1011	0110	1000	0101	0011	1111	1101	0000	1110	1001
	01	1110	1011	0010	1100	0100	0111	1101	0001	0101	0000	1111	1010	0011	1001	1000	0110
	10	0100	0010	0001	1011	1010	1101	0111	1000	1111	1001	1100	0101	0110	0011	0000	1110
	11	1011	1000	1100	0111	0001	1110	0010	1101	0110	1111	0000	1001	1010	0100	0101	0011

Figure 3.4: An Example of  $S$  Box

The choice of these functions is subtle. For example, linear functions

$$S_i(\vec{x}) = A_i \cdot \vec{x} \pmod{2}$$

with  $A_i$  being a  $4 \times 6$  matrix are bad choices. The reason is that we can then find a  $64 \times 832$  matrix  $B$  such that

$$DES(k, m) = B \cdot (m \ k_1 \ \cdots \ k_{16})^T = c,$$

i.e DES as a whole becomes linear. Then we have

$$DES(k, m_1) \oplus DES(k, m_2) \oplus DES(k, m_3) = DES(k, m_1 \oplus m_2 \oplus m_3,$$

which is not a property that holds for a random function, and thus makes our DES insecure. What's worse, all round keys can be extracted given 832  $m - c$  pairs.

It has been proven that even choosing the  $S$  boxes and  $P$  box at random will result in an insecure block cipher. There are a lot of rules limiting the choices in order to guarantee the security of DES.

### 3.3 Attacks on DES

#### 3.3.1 Exhaustive Search Attack

The goal of an **exhaustive search attack** is to recover the key  $k$  given 3 input-output pairs  $m_i, c_i = E(k, m_i), i = 1, 2, 3$ . We use “the” key because the following lemma convinces us of its uniqueness.

**Lemma 7.** *Suppose DES is an **ideal cipher**<sup>2</sup>, i.e. DES is a collection of  $2^{56}$  random invertible functions*

$$\pi_i : \{0, 1\}^{64} \rightarrow \{0, 1\}^{64}, i = 1, \dots, 2^{56}.$$

Then  $\forall m, c$ ,

$$Pr(\text{at most one key s.t. } c = DES(k, m)) \geq 1 - \frac{1}{2^{56}} \approx 99.5\%.$$

*Proof.*

$$\begin{aligned} & Pr(\exists k' \neq k \text{ s.t. } c = DES(k, m) = DES(k', m)) \\ & \leq \sum_{k'} Pr(DES(k', m) = DES(k, m)) \\ & = 2^{56} \cdot \frac{1}{2^{64}} = \frac{1}{2^{56}} \end{aligned}$$

□

This fact makes it possible to find the  $k$  with brute force search with only one  $m - c$  pair. It is not that difficult to use modern computers to do this with a 56-bit cipher, so 56-bit DES ciphers should no longer be used.

There are ways to enhance the security of DES.

#### 3DES

Let  $E : K \times M \rightarrow M$  be a 56-bit DES cipher. The define a 3DES cipher  $3E : K^3 \times M \rightarrow M$  as

$$3E((k_1, k_2, k_3), m) = E(k_1, D(k_2, E(k_3, m))).$$

3DES has the key size of  $56 \times 3 = 168$ . It is safer than DES, but it is also 3 times slower. We use E-D-E instead of E-E-E in order to be able to produce DES result with  $k_1 = k_2 = k_3$ .

The reason to use 3DES instead of 2DES is that 2DES is breakable with less time than it appears to need, making it insecure. Define

$$2E((k_1, k_2, k_3), m) = E(k_1, E(k_2, m)).$$

---

<sup>2</sup>This is idealized, not the actual situation

Given a  $m - c$  pair, we have  $E(k_1, E(k_2, m)) = c$ , therefore  $D(k_1, c) = E(k_2, m)$ , which inspires us of a new way to break the cipher, namely the meet-in-the-middle attack.

First we calculate  $E(k_i, m)$  for all  $2^{56}$  possible keys and save them in a table. Then we sort the table according to the value of  $E(k_i, m)$ . Finally for each possible  $k_i$ , we calculate  $D(k_i, c)$  and search for it in the table. Building and sorting the table takes  $2^{56} \log(2^{56})$  time. Searching takes another  $2^{56} \log(2^{56})$  time. In total the time consumption is smaller than  $2^{63} \ll 2^{112}$ , making 2DES insecure.

The same strategy can be used to break 3DES in  $2^{118}$  time:

$$2^{56} \log(2^{56}) + 2^{56 \times 2} \log(2^{56}) = 2^{118}.$$

### DESX

Define DESX cipher  $EX : K^3 \times M \rightarrow M$  as

$$EX((k_1, k_2, k_3), m) = k_1 \oplus E(k_2, k_3 \oplus m).$$

It has a key length of  $64+56+64=184$ . A meet-in-the-middle attack takes  $2^{120}$  time: using  $k_1 \oplus c = E(k_2, k_3 \oplus m)$ , the time consumption is

$$2^{56+64} \log(2^{56+64}) + 2^{64} \log(2^{56+64}) = 2^{120}.$$

Nonetheless, if only one XOR is used, i.e.  $k_1$  or  $k_3$  is not used, the cipher will be no securer than DES.

### 3.3.2 Side Channel Attacks

An attacker can obtain the key by precisely measuring the time or power consumption of encryption/decryption. If the cipher is run in one of the cores of a multi-core processor, an attacker can obtain the key by counting the number of cache misses in the shared cache.

### 3.3.3 Fault Attack

An error in the last round can expose the secret key. Thus the correctness of the algorithm needs to be guaranteed, which serves as a strong reason for us not to attempt to implement cryptography primitives.

### 3.3.4 Linear/Differential Attacks

The goal is to recover the key in less than  $2^{56}$  time when given many  $m - c$  pairs. Suppose for random  $k, m$ ,

$$Pr((m[i_1] \oplus \dots \oplus m[i_r]) \oplus (c[j_1] \oplus \dots \oplus c[j_r]) = k[l_1] \oplus \dots \oplus k[l_r]) = \frac{1}{2} + \epsilon$$

holds for some non-zero  $\epsilon$ , in which  $m[i_1] \dots m[i_r]$  is a subset of the message bits,  $c[j_1] \dots c[j_r]$  is a subset of the cipher text bits, and  $k[l_1] \dots k[l_r]$  is a subset of the key bits, then we have the following theorem.

**Theorem 8.** *Given  $\frac{1}{\epsilon^2}$  random  $m - c$  pairs, then we have*

$$k[l_1] \oplus \dots \oplus k[l_r] = \text{mode}((m[i_1] \oplus \dots \oplus m[i_r]) \oplus (c[j_1] \oplus \dots \oplus c[j_r]))$$

*with a probability  $\geq 97.7\%$ .*

Mode is the statistical mode: element with maximum frequency.

For DES, we have  $\epsilon = \frac{1}{2^{21}}$ . With  $2^{42}$   $m - c$  pairs we can find 14 key bits in time  $2^{42}$ . Then we can do a brute force search for the remaining bits in  $2^{42}$  time, thus the overall attack time is  $2^{43} \ll 2^{56}$ .

This is another reason against implementing our own ciphers: a little bias of the cipher leads to an easy attack.

### 3.3.5 Quantum Attacks

Consider a generic problem: given  $f : X \rightarrow \{0, 1\}$  that is a function evaluating to 0 most of the time, try to find  $x \in X$  s.t.  $f(x) = 1$ . On a classical computer, the best generic algorithm takes  $O(|X|)$  time. A quantum on the contrary can solve the problem in  $O(\sqrt{|X|})$  time.

To attack a block cipher, we can use the function

$$f(k) = \begin{cases} 1 & \text{if } E(k, m) = c \\ 0 & \text{otherwise} \end{cases}$$

This means that a quantum search algorithm can find the key in  $O(\sqrt{|K|})$  time. For DES this means  $2^{28}$  time.