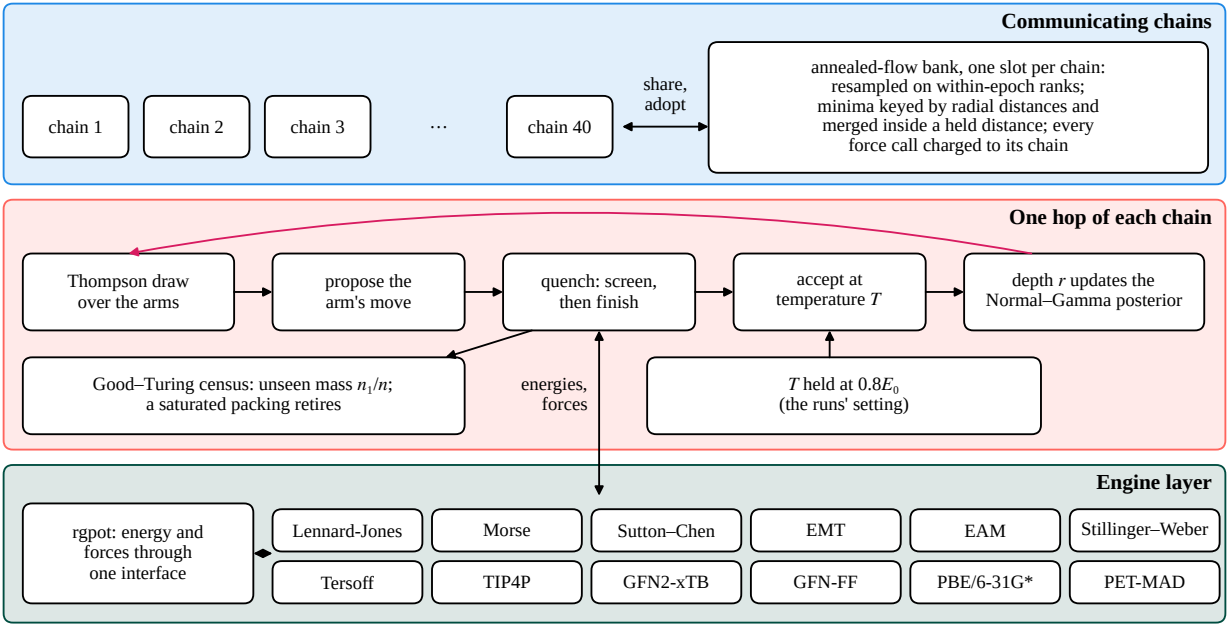
Communicating chains
chain 1
chain 2
chain 3
…
chain 40
share,
adopt
annealed-flow bank, one slot per chain:
resampled on within-epoch ranks;
minima keyed by radial distances and
merged inside a held distance; every
force call charged to its chain
One hop of each chain
Thompson draw
over the arms
propose the
arm's move
quench: screen,
then finish
accept at
temperature T
depth r updates the
Normal–Gamma posterior
Good–Turing census: unseen mass n_1/n;
a saturated packing retires
energies,
forces
T held at $0.8E_0$
(the runs' setting)
Engine layer
rgpot: energy and
forces through
one interface
Lennard-Jones
Morse
Sutton–Chen
EMT
EAM
Stillinger–Weber
Tersoff
TIP4P
GFN2-xTB
GFN-FF
PBE/6-31G*
PET-MAD