



A content-aware variable-rate framework for pathology learned image compression (PathoLIC)

Weiqli Li ^a, Yonghao Li ^a, Haoyuan Chen ^a, Long Yang ^a, Lin Wu ^b, Zhenhui Li ^c,
Jing Ke ^{d,*}, Dinggang Shen ^{a,e,f,*}

^a School of Biomedical Engineering & State Key Laboratory of Advanced Medical Materials & Devices, ShanghaiTech University, Shanghai, China

^b Department of Pathology, The Third Affiliated Hospital of Kunming Medical University, Yunnan Cancer Hospital, Yunnan Cancer Center, Kunming, Yunnan, China

^c Department of Radiology, The Third Affiliated Hospital of Kunming Medical University, Yunnan Cancer Hospital, Kunming, Yunnan, China

^d School of Computer Science and Engineering, Shanghai Jiao Tong University, Shanghai, China

^e Department of Research and Development, United Imaging Intelligence, Shanghai, China

^f Shanghai Clinical Research and Trial Center, Shanghai, China

ARTICLE INFO

Keywords:

Learned image compression

Whole slide image (WSI)

Variable-rate compression

ABSTRACT

The substantial size of gigapixel whole slide images (WSIs) presents significant challenges in terms of data storage, transfer, and computational analysis. Existing image compression methods yield suboptimal compression ratios because they (1) overlook redundancy across neighboring/similar patches, and (2) apply uniform compression without considering content differences. To address these issues, we introduce **PathoLIC** (Pathology Learned Image Compression), a novel learning-based variable-rate compression framework tailored for WSI. Specifically, PathoLIC initially assigns a content score to each non-overlapping patch in the WSI, which reflects its diagnostic relevance. The compression level for each patch is determined based on the content scores, prioritizing detail preservation in diagnostically important regions, e.g., tumor area, while compressing more on less informative regions, e.g., stroma and background. Furthermore, PathoLIC employs attention mechanisms to capture relationships between neighboring or similar patches, which minimize redundancy by compressing shared features. Experimental results demonstrate that PathoLIC achieves over 8× compression beyond the standard Aperio SVS format while preserving image details. Moreover, it maintains strong performance across various downstream tasks, such as patch-level (WSI-level) cancer subtyping and nuclei segmentation. These results demonstrate its potential for large-scale WSI data management. The source code will be released at <https://github.com/wqli498/PathoLIC>.

1. Introduction

Digital pathology is an emerging field in modern medicine that converts histology slides into high-resolution whole slide images (WSIs) for computational analysis (Lu et al., 2021). With the rapid development of digital scanning technologies, clinical centers are now producing vast collections of WSIs for diagnostics, research, and long-term archiving. However, the enormous volume of digitized tissue slides presents major challenges in data storage and management. A single WSI at 40× magnification can reach resolutions of up to 80,000 × 80,000 pixels, with corresponding file sizes ranging from 1 to 4 GB (Van der Laak et al., 2021). For institutions that archive tens of thousands of slides, total data storage requirements can scale to multiple petabytes, posing significant challenges in both data storage and transfer (Association, 2019).

The Aperio ScanScope Virtual Slide (SVS) format is the most widely adopted standard for WSI storage. It represents WSIs as multi-resolution

pyramids, compressed with either JPEG or JPEG2000. In particular, JPEG relies on block-wise discrete cosine transforms (DCT) with quantization, while JPEG2000 employs wavelet transforms that support both lossy and lossless compression modes. JPEG enables fast compression but often introduces visible artifacts (Wallace, 2002), whereas JPEG2000 achieves higher fidelity at the cost of increased computational complexity (Taubman et al., 2002). Consequently, SVS files remain large and could benefit from more advanced compression techniques.

Given these limitations, there has been a growing research interest in learned image compression (LIC) (Ballé et al., 2018; Minnen et al., 2018; Cheng et al., 2020), which involves training artificial neural networks on large-scale image datasets. Specifically, LIC systems comprise two main components: an autoencoder and an entropy model (Ballé et al., 2018). The autoencoder compresses the input image into a compact latent representation and then reconstructs it from this representation, while the

* Corresponding authors.

E-mail addresses: kejing@sjtu.edu.cn (J. Ke), dgshen@shanghaitech.edu.cn (D. Shen).

<https://doi.org/10.1016/j.media.2026.104018>

Received 4 November 2025; Received in revised form 12 February 2026; Accepted 2 March 2026

Available online 6 March 2026

1361-8415/© 2026 Elsevier B.V. All rights reserved, including those for text and data mining, AI training, and similar technologies.

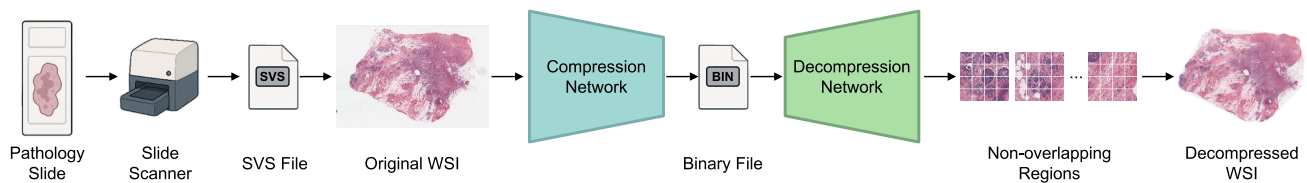


Fig. 1. The workflow of PathoLIC. Histology slides are digitized into WSIs in SVS format, which are partitioned into non-overlapping regions, each containing 16 patches. By exploiting patch-level correlations, the network reduces redundancy and yields a binary file significantly smaller than the original SVS. During decompression, PathoLIC restores the WSI with high fidelity, ensuring that fine-grained histological details are preserved.

entropy model estimates the probability distribution of the latent codes to facilitate efficient compression. Values with higher probabilities are encoded with fewer bits. The framework is optimized to achieve a balance between compression rate and image fidelity. Extensive evaluations on natural image benchmarks have shown that LIC methods consistently outperform conventional approaches in both perceptual quality and rate-distortion performance (Cheng et al., 2020).

Despite recent progress, existing image compression approaches remain suboptimal for WSI compression as they overlook key properties of WSIs. Given their enormous resolution, WSIs are generally divided into non-overlapping patches for data preprocessing and downstream analysis (Xu et al., 2024; Wang et al., 2024). However, compressing patches independently using existing LIC methods ignores spatial redundancy across neighboring patches with similar morphology, resulting in insufficient compression.

More importantly, most existing LIC models are optimized for a fixed rate-distortion trade-off (Minnen et al., 2018; Cheng et al., 2020). Therefore, they yield similar compression levels across diverse inputs, regardless of their content variability. Nonetheless, diagnostic importance varies across different regions within WSIs. For example, tumor regions are of higher diagnostic importance than normal or fatty tissue (Angell et al., 2013). Therefore, diagnostically relevant regions should be compressed at higher fidelity, while less informative areas can be more aggressively compressed to improve overall efficiency. This characteristic of WSIs calls for content-aware compression frameworks with variable compression ratios. While recent variable-rate LIC models (Song et al., 2021; Cai et al., 2024) support flexible compression levels via introducing a global rate-distortion hyperparameter, they cannot automatically assign compression levels across WSI patches based on their contents.

To address these challenges, we propose **PathoLIC**, a content-aware, variable-rate compression framework tailored for WSIs. As illustrated in Fig. 1, our framework simultaneously processes 16 patches as input, considering (1) the diagnostic relevance of each patch and (2) the spatial correlations among neighboring or similar patches. PathoLIC produces a highly compressed binary representation, significantly reducing storage requirements while preserving fine-grained histological details. The key contributions of PathoLIC can be summarized as follows:

1. We present a learning-based variable-rate framework for WSI-level image compression, namely PathoLIC. It computes patch-level content scores to guide adaptive compression, preserving critical content at higher fidelity while allocating fewer bits to less informative areas.
2. We leverage attention mechanisms to model correlations among neighboring or similar patches, thereby reducing redundancy through the compression of shared features.
3. We propose a region-wise WSI bitstream format to combine latent bitstreams with content-score metadata, for enabling efficient coordinate- and score-based decoding.

To the best of our knowledge, PathoLIC is the first framework that leverages content-aware strategies in whole slide image compression. PathoLIC is validated using both compression metrics and clinically relevant downstream tasks. Specifically, we benchmark its rate-distortion performance against conventional compression approaches and state-

of-the-art LIC methods. To assess its practical utility, we further test its robustness across a diverse set of diagnostic tasks using public and in-house datasets covering multiple cancer types.

Extensive experiments demonstrate that PathoLIC achieves an average compression ratio $8\times$ higher than the SVS format, while maintaining comparable performance on various downstream tasks. These results highlight the potential of PathoLIC as a practical and scalable solution for efficient WSI data management in digital pathology.

2. Related work

2.1. Digital pathology and computational tasks

WSI has reshaped computational pathology by facilitating automated analysis of histological specimens for applications such as cancer diagnosis, tumor grading, and cellular characterization (Madabhushi and Lee, 2016; Litjens et al., 2017; Komura and Ishikawa, 2018). These diagnostic tasks operate across multiple spatial resolutions, ranging from individual patches to entire WSIs. At the cellular level, fine-grained analyses such as nucleus segmentation and phenotype classification are essential for quantifying the tumor microenvironment (Kumar et al., 2017; Graham et al., 2019; Gamper et al., 2019). Patch-level methods focus on performing mitosis detection, histological grading, and tissue classification (Aresta et al., 2019; Hou et al., 2016) with localized tissue regions as inputs. At the WSI level, models leverage global contextual information to perform cancer classification and tumor subtyping (Campanella et al., 2019; Lu et al., 2021) without requiring fine-grained manual annotations.

2.2. Traditional image compression

Traditional image compression algorithms such as JPEG (Wallace, 2002) and JPEG2000 (Taubman et al., 2002) employ hand-crafted transform coding pipelines based on the discrete cosine transform (DCT) or wavelet transforms, followed by quantization and entropy coding. In digital pathology, WSIs are typically stored using TIFF-based container formats (e.g., SVS, NDPI) that organize large images as pyramids. Lossy JPEG compression, which divides images into blocks and applies the DCT followed by quantization and entropy coding, is commonly used to balance file size and visual quality (Farahani et al., 2015). However, WSI files still occupy substantial storage space and can be further compressed to reduce storage and transmission costs.

2.3. Learned image compression

Learned image compression (LIC) frameworks employ end-to-end trainable autoencoder architectures, where the encoder, decoder, and entropy model are jointly optimized to balance compression rate and image fidelity (Ballé et al., 2017; Toderici et al., 2017). The introduction of hyperprior models (Ballé et al., 2018), typically implemented with convolutional neural networks (CNNs), further enhances compression efficiency by enabling more accurate entropy estimation. Recently, transformer-based architectures have been investigated to further improve compression performance (Zhu et al., 2022; Liu et al., 2023).

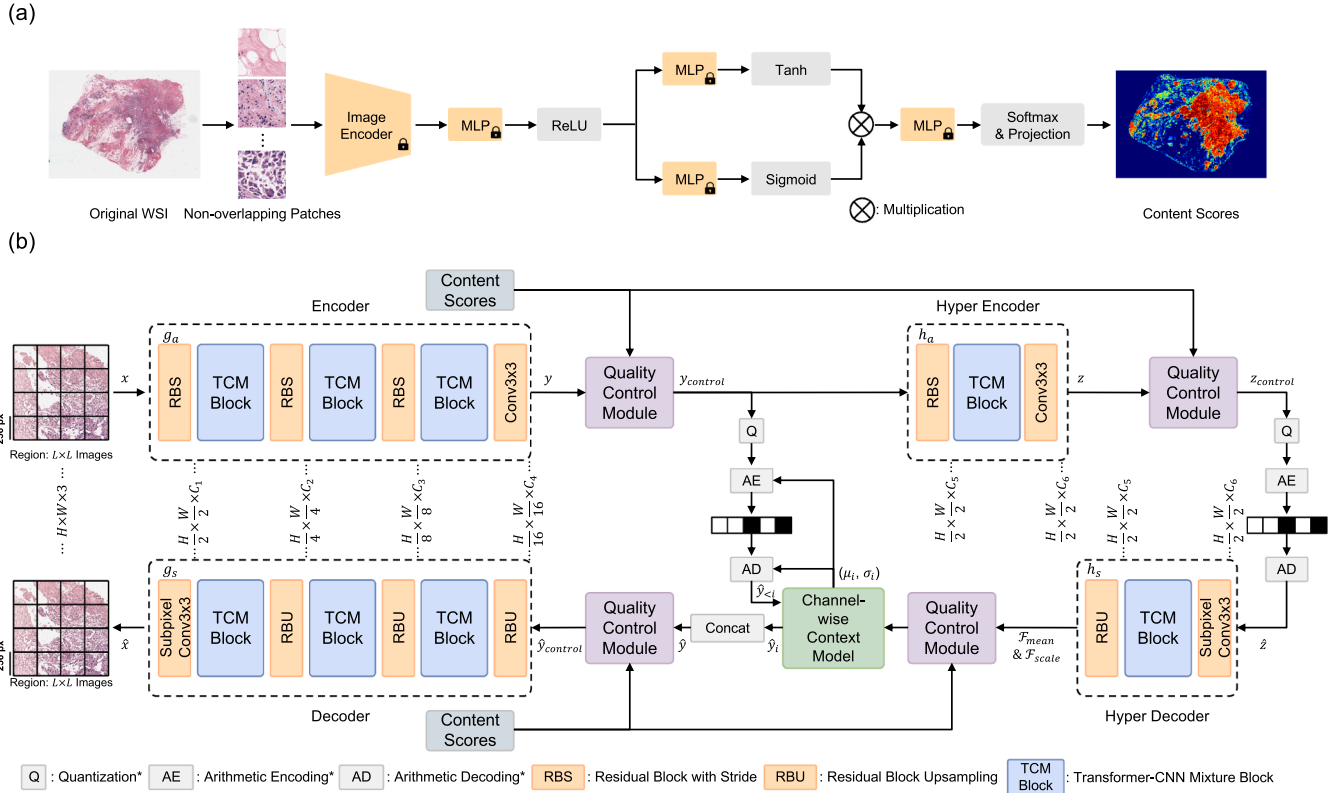


Fig. 2. An overview of the proposed framework for WSI compression. (a) Generation of content scores for WSI-level inference. A pretrained foundation model (e.g., CHIEF (Wang et al., 2024)) is used to produce an attention map, highlighting diagnostically salient areas. The map is normalized and converted into patch-level content scores. (b) Detailed architecture of PathoLIC. The framework consists of an encoder g_a , a hyper-encoder h_a , a decoder g_s , a hyper-decoder h_s , a channel-wise context model, and quality control modules (QCMs). QCMs are inserted at multiple stages to adapt feature representations based on input content scores. During training, AE and AD are excluded, and the rate is estimated using the entropy model (* means inference only).

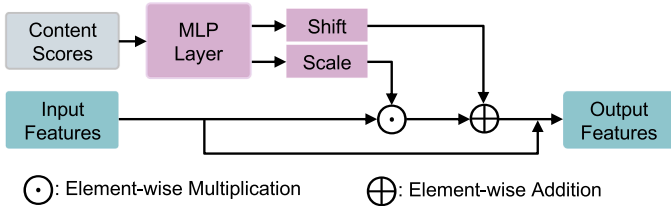


Fig. 3. Architecture of the proposed QCM. Content scores Q are mapped by an MLP to generate scale (α) and bias (β) parameters, which modulate the input feature map via an affine transformation for content-aware compression.

However, early LIC methods are trained for a fixed compression level, which limits their flexibility. To address this limitation, variable-rate frameworks have been proposed to adapt bitrates based on external control signals. For instance, QmapCompression (Song et al., 2021) and I2C (Cai et al., 2024) employ Spatially Feature Transforms (SFT) or Invertible Activation Transformations (IAT) using convolutional networks to perform pixel-wise modulation based on spatial quality maps.

Unlike existing methods, our framework accounts for the unique characteristics of whole slide images (WSIs) to improve compression efficiency. First, it can automatically assign patch-level compression rates according to the diagnostic importance of each patch. Second, the model leverages a Transformer to capture spatial correlations among neighboring or similar patches, thereby further reducing redundancy.

3. Method

We illustrate the overall framework of PathoLIC in Fig. 2. The input WSI is first partitioned into non-overlapping patches, each assigned with a content score according to its clinical relevance. Neighboring patches are then grouped into fixed-size regions of $L \times L$ patches. PathoLIC compresses each region into a bitstream under the guidance of patch-level content scores. The compressed WSI is obtained by aggregating the bitstreams generated from all regions, which can be decompressed to reconstruct the original WSI. Section 3.1 introduces the measurement of patch-level diagnostic value. The generated patch-level content scores guide the subsequent context-aware compression and decompression processes (see Sections 3.2 and 3.3), while the training and inference strategies of PathoLIC are detailed in Section 3.4.

3.1. Assessment of patch-level diagnostic relevance

Our objective is to achieve variable-rate compression of WSI based on the patch-level diagnostic importance. Traditional measures, such as entropy, are effective at capturing pixel-level statistics but fail to reflect the clinical relevance of different regions within the WSI. In contrast, recent pathology foundation models can automatically extract disease-relevant features to perform WSI-level predictive tasks (Xu et al., 2024; Wang et al., 2024). Thus, we adopt CHIEF, a pretrained foundation model (Wang et al., 2024), to estimate patch-level content scores. As illustrated in Fig. 2(a), patch-level features extracted by CHIEF are processed through an attention module composed of multilayer perceptron (MLP) layers and a Tanh-Sigmoid gating mechanism, which produces an attention score for each patch. To obtain the final content scores for variable-rate compression, attention values are projected using an

exponential function. In practice, high content scores align with diagnostically salient areas such as tumors or inflammatory regions, whereas low content scores are associated with less informative tissues such as adipose or stromal areas.

3.2. Content-aware WSI compression

A distinctive characteristic of WSIs is that adjacent patches often share similar tissue morphology. Leveraging this property, our first key innovation is to exploit the correlations among neighboring patches during compression, thereby enhancing compression efficiency. As shown in Fig. 2(b), an encoder $g_a(\cdot)$ first maps the input region x of $L \times L$ patches into latent features:

$$y = g_a(x), \quad (1)$$

where g_a is composed of Residual Blocks with Stride (RBS) (Cheng et al., 2020) and Transformer-CNN Mixture (TCM) blocks (Liu et al., 2023). Specifically, the RBS modules apply residual downsampling via stridden convolutions and progressively reduce the spatial resolution of feature maps. The TCM block employs a hybrid design that combines convolutional layers with Transformer layers. Convolutional layers capture local patterns like nuclei boundaries and textures, while Transformer layers model long-range spatial dependencies, allowing patches to refine their representations through global interactions. By combining the complementary strengths of convolution and self-attention, the proposed framework achieves a balance between local detail preservation and global contextual representation.

Another key aspect of our framework is variable-rate compression guided by patch-level diagnostic relevance. In particular, the latent features are modulated by the proposed Quality Control Module (QCM) under the guidance of content scores Q of the input region:

$$y_{\text{control}} = \text{QCM}_y(y, Q). \quad (2)$$

As illustrated in Fig. 3, QCM applies a feature-wise affine transformation conditioned on Q . Given an input feature F , QCM generates channel-wise scale and bias parameters using a lightweight MLP:

$$[\alpha, \beta] = \text{MLP}(Q), \quad \alpha, \beta \in \mathbb{R}^C, \quad (3)$$

$$F_{\text{modulated}} = (\alpha + 1) \odot F + \beta, \quad (4)$$

where C is the channel dimensionality and $\odot$ denotes the element-wise channel scaling. The residual-style scaling $(\alpha + 1)$ preserves the stability of the original features while allowing controlled amplification or attenuation with respect to the target quality. The bias β further introduces a flexible shift, allowing the network to adjust feature distributions as needed. Together, these two operations provide fine-grained modulation of intermediate representations, allowing QCM to seamlessly adapt across different compression levels.

To improve entropy modeling, a hyper-encoder $h_a(\cdot)$ extracts side information from the modulated latent features:

$$z = h_a(y_{\text{control}}), \quad (5)$$

which is further processed by another QCM:

$$z_{\text{control}} = \text{QCM}_z(z, Q), \quad (6)$$

and then quantized:

$$\hat{z} \leftarrow \text{Quantize}(z_{\text{control}}). \quad (7)$$

The hyperprior pathway, therefore, provides accurate distributional priors for entropy coding of the main latent information. Importantly, quantization (Q), arithmetic encoding (AE) and decoding (AD) are utilized exclusively during inference. Specifically, AE converts $\hat{y}$, $\hat{z}$, and the corresponding content scores into binary streams for storage, while AD reconstructs features from these streams. Consequently, the final compressed WSI is represented as the aggregation of the binary streams from all input WSI regions.

3.3. Content-aware WSI decompression

The decoder of PathoLIC mirrors the encoding process to reconstruct image patches, with reconstruction fidelity explicitly guided by the content scores. In particular, the hyper-decoder $h_s(\cdot)$ estimates the channel-wise spatial statistics—specifically, the mean (μ) and variance (σ)—from $\hat{z}$, which are subsequently modulated by the content scores:

$$\mu, \sigma = h_s(\hat{z}), \quad (8)$$

$$(\mu_{\text{control}}, \sigma_{\text{control}}) = \text{QCM}_{\mu\&\sigma}(\mu, \sigma, Q). \quad (9)$$

The modulated latent y_{control} is then quantized and passed through the channel-wise context model (CCM) for entropy coding:

$$\hat{y} = \text{CCM}(\text{Quantize}(y_{\text{control}}); \mu_{\text{control}}, \sigma_{\text{control}}), \quad (10)$$

where the CCM employs masked convolutions and attention layers to capture both local and non-local dependencies across latent channels (see (Liu et al., 2023) for details). By leveraging these dependencies, the CCM produces more accurate probability estimates, further reducing the expected bits.

Finally, the quantized latent $\hat{y}$ is modulated once more:

$$\hat{y}_{\text{control}} = \text{QCM}_{\hat{y}}(\hat{y}, Q), \quad (11)$$

before being decoded by $g_s(\cdot)$ to reconstruct the input region:

$$\hat{x} = g_s(\hat{y}_{\text{control}}). \quad (12)$$

3.4. Optimization and inference strategy

It is important to note that the content scores derived from foundation models are applied only at the inference stage to guide compression. During training, the model instead relies on the content scores randomly sampled from a fixed range, which enhances generalization of PathoLIC across diverse compression levels. For each patch x , a content score q is sampled from a uniform distribution, $q \sim \mathcal{U}[0, 1]$, and mapped to the corresponding weighting factor $\lambda \in [0.0025, 0.04]$ via an exponential projection: $\lambda(q) = 0.0025 \left(\frac{0.04}{0.0025} \right)^q$. Crucially, we treat the content score Q as a continuous ‘soft prior’ for rate allocation. The mapping is bounded ($\lambda \in [0.0025, 0.04]$) to establish a quality floor, preventing overly aggressive compression in low-score regions regardless of the foundation model’s bias. The model is then optimized end-to-end to minimize the rate-distortion loss:

$$\mathcal{L} = \mathbb{E}_{x, Q} [R(x; Q) + \lambda(Q) D(x, \hat{x}(Q))], \quad (13)$$

where $R(\cdot)$ denotes the estimated rate term, computed as the sum of the negative log-likelihoods (expected bit cost) of the quantized latents and hyper-latents, Q denotes the set of content scores of all patches within the input region, $D(\cdot)$ is the distortion measured by MSE, and $\lambda(Q)$ controls the trade-off between compression efficiency and reconstruction fidelity. This setup forces the model to learn a continuous mapping from content scores to different compression levels, thereby improving its generalization across diverse compression settings. During inference, each patch is assigned a content score derived from the attention values of the pathology foundation model (Wang et al., 2024), as outlined in Section 3.1. The same exponential mapping is then applied to compute $\lambda(Q)$.

3.5. WSI bitstream storage and decompression

For model deployment, we design a region-wise WSI bitstream format to enable efficient storage and access of compressed WSIs in standard digital pathology settings. Specifically, the WSI is partitioned into non-overlapping regions, where every 4×4 adjacent patches are aggregated into a single compressed bitstream segment. A lightweight index table is maintained in the file header to map the spatial coordinates of these units to their corresponding byte offsets, enabling high-speed

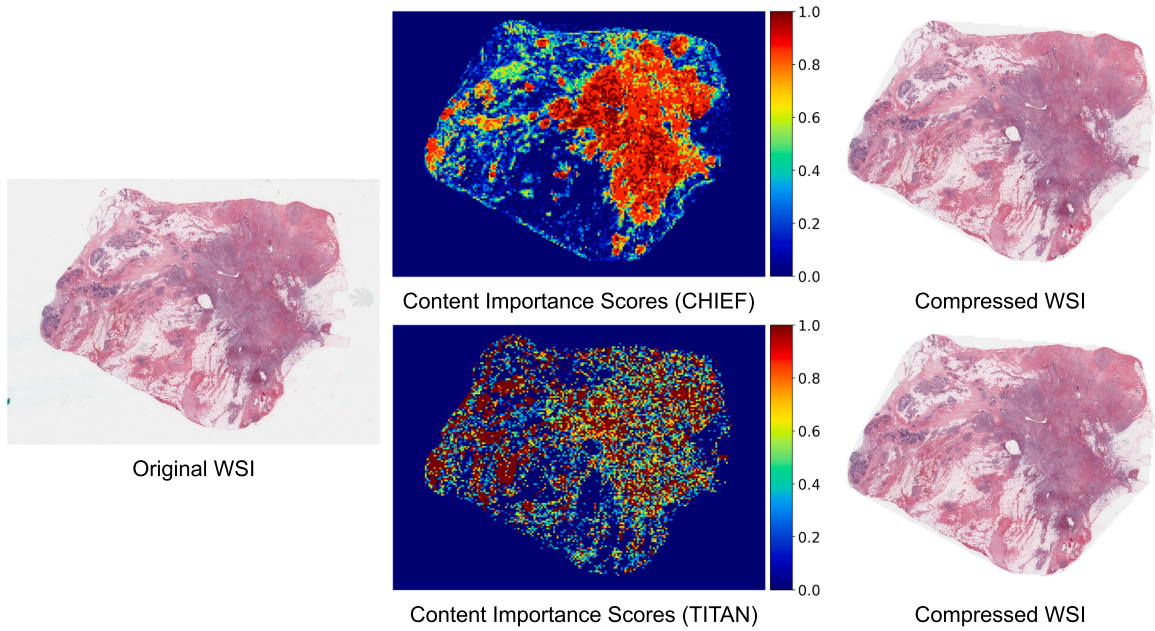


Fig. 4. Visual comparison of the proposed framework guided by two foundation models (CHIEF vs. TITAN). Both models consistently highlight tumor regions (red) and suppress background.

Table 1

Overview of dataset usage and data splits. The underlined values indicate the data used to train the PathoLIC compression model.

Dataset	Unit	Training	Validation	Test	Downstream Evaluation
TCGA-BRCA	WSI	<u>623</u>	208	209	WSI-level subtyping, Survival prediction
TCGA-NSCLC	WSI	<u>620</u>	206	207	WSI-level subtyping, Survival prediction
TCGA-RCC	WSI	<u>561</u>	188	188	WSI-level subtyping
BACH	WSI	18	2	8	Patch-level classification
	Patch (512×512)	12,384	4127	4130	
	Patch ($1,024 \times 1,024$)	3060	1019	1023	
In-house	WSI	<u>18</u>	4	8	Patch-level classification
	Patch (512×512)	3940	1313	1315	
	Patch ($1,024 \times 1,024$)	122	40	43	
PanNuke	Patch	5179	–	2722	Cell-level segmentation
MNS	Patch	431	–	209	Cell-level segmentation
NCT-CRC-HE-100K	Patch	100,000	–	7180	ROI retrieval

random access without global scanning. Based on the practical needs of clinicians during diagnosis, the decoding scheme is designed to provide two key functionalities:

- **WSI-level decompression:** It supports decoding the complete bitstream back into standard pyramidal SVS formats, ensuring compatibility with existing commercial slide viewers (e.g., Aperio ImageScope, QuPath).
- **Region-level decompression:** Leveraging the spatial independence of our block-based compression, the interface allows users to decode specific regions based on coordinates or diagnostic scores without processing the entire file. For example, clinicians can choose to decode only the top 10% diagnostically relevant patches for rapid assessment, significantly reducing I/O latency in bandwidth-constrained environments.


4. Dataset preparation and experimental settings

4.1. Datasets for training and evaluation


We first introduce the training dataset of PathoLIC, followed by a description of diverse public and in-house datasets used to evaluate our framework across multiple tissue types and downstream tasks. We evaluate PathoLIC following a hierarchy of downstream clinical tasks, including WSI-level tasks (subtyping and survival prediction), patch-level tasks (histology classification and ROI retrieval), and cell-level task (nuclei segmentation).

4.1.1. Datasets for compression

As shown in Table 1, PathoLIC is trained on 73,730 patches, with 1000 patches reserved for validation and 3694 for test. All patches ($1,024 \times 1,024$ pixels at 40 $\times$ magnification) are extracted from

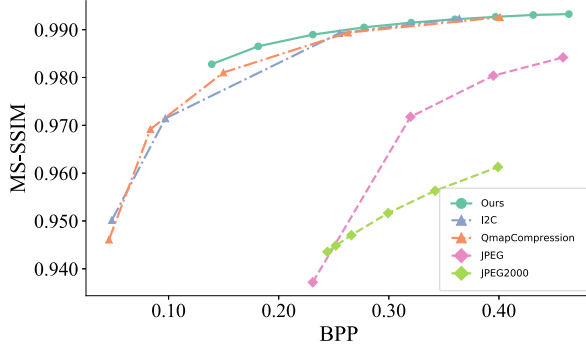

(a) Various rates on MS-SSIM

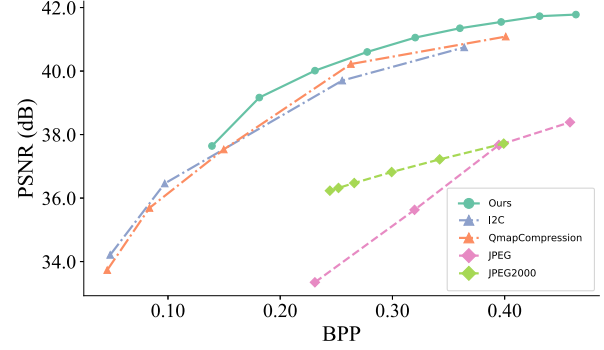

(b) Various rates on PSNR

Fig. 5. Rate-distortion comparison. PathoLIC achieves superior Multi-Scale Structural Similarity Index (MS-SSIM) and Peak Signal-to-Noise Ratio (PSNR) across a range of Bits-Per-Pixel (BPP) compared to traditional compression methods (JPEG, JPEG2000) and other LIC methods (QmapCompression, I2C).

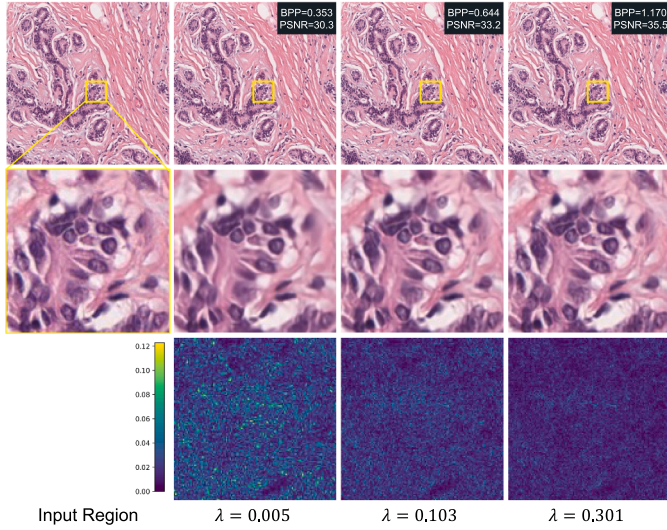


Fig. 6. Region-level visualization across different λ values using our model. The first row shows original and reconstructed regions, the second row presents zoomed-in diagnostically relevant patches, and the third row depicts difference maps between original images and reconstruction images.

TCGA-BRCA (Weinstein et al., 2013), TCGA-NSCLC, as well as from an in-house dataset collected at Yunnan Cancer Hospital. Importantly, patches used to train the compression model are excluded from the validation of downstream tasks.

4.1.2. Datasets for WSI-level subtyping

We employ three datasets from The Cancer Genome Atlas (TCGA) for WSI-level evaluation. The detailed data splits for training, validation, and test are summarized in Table 1.

- **TCGA-BRCA:** Consists of invasive breast carcinoma WSIs utilized for tumor subtyping tasks.
- **TCGA-NSCLC:** Includes WSIs of lung adenocarcinoma (LUAD) and lung squamous cell carcinoma (LUSC) for lung cancer subtype classification.
- **TCGA-RCC:** Covers three renal cell carcinoma subtypes: kidney renal clear cell carcinoma (KIRC), kidney renal papillary cell carcinoma (KIRP), and kidney chromophobe carcinoma (KICH).

4.1.3. Datasets for WSI-level survival prediction

We conduct WSI-level survival prediction on TCGA-BRCA and TCGA-NSCLC datasets. For each dataset, we use the same WSI set as in the subtyping task and adopt the available survival endpoints for evaluation. Model performance is evaluated using the Concordance Index (C-index).

4.1.4. Datasets for patch-level classification

We utilize two datasets for patch-level histology classification. Non-overlapping patches are cropped at two resolutions (512×512 and $1,024 \times 1,024$) to evaluate performance across different scales. The specific distribution of WSIs and patches is detailed in Table 1.

- **BACH:** Derived from the BACH dataset, this subset contains expert-annotated WSIs processed for multi-class histology classification.
- **In-house dataset:** This dataset comprises breast cancer WSIs collected from Yunnan Cancer Hospital, curated for a binary classification task (normal vs. invasive).

4.1.5. Datasets for ROI retrieval

We utilize the NCT-CRC-HE-100K dataset (Kather et al., 2018) to evaluate patch-level retrieval performance, strictly following the data distribution and experimental settings of UNI (Chen et al., 2024). This dataset consists of 107,180 non-overlapping patches (224×224 pixels at 0.5 mpp) extracted from H&E-stained colorectal cancer WSIs, covering 9 tissue classes (e.g., adipose, mucus, cancer-associated stroma). We use the official case-stratified split, comprising a training set of 100,000 patches (NCT-CRC-HE-100K) and a test set of 7180 patches (CRC-VAL-HE-7K).

4.1.6. Datasets for cell-level segmentation

We assess fine-grained segmentation performance using two benchmarks. The quantity of patches used for training and test is listed in Table 1.

- **PanNuke:** This dataset contains semi-automatically generated H&E-stained patches sampled from 19 different tissue types (Gamper et al., 2019).
- **Merged nuclei segmentation benchmark (MNS):** To rigorously evaluate generalization, we construct a unified benchmark merging four public datasets: CoNSeP (Graham et al., 2019), Lizard (Graham et al., 2021), MoNuSeg (Kumar et al., 2017), and MoNuSAC (Verma et al., 2021).

Table 2

Storage statistics (GB) and compression ratios (Original/Compressed) for the TCGA-NSCLC dataset. PathoLIC (guided by CHIEF and TITAN) is benchmarked against the standard JPEG baseline across training, validation, and test splits to demonstrate overall storage efficiency.

Split	Original (GB)	PathoLIC _{CHIEF} (GB)	Ratio _{CHIEF}	PathoLIC _{TITAN} (GB)	Ratio _{TITAN}	JPEG (GB)	Ratio _{JPEG}
Training	470.60	88.36	5.33×	52.11	9.03×	98.07	4.80×
Validation	138.95	26.61	5.22×	15.63	8.89×	28.35	4.90×
Test	148.92	28.16	5.29×	16.60	8.97×	30.01	4.96×
All	758.47	143.13	5.30×	84.34	8.99×	150.58	5.04×

Table 3

Comparison of average encoding/decoding time (seconds per patch) and model size (MB).

Method	Enc. Time (s)	Dec. Time (s)	Model Size (MB)
JPEG	0.035	0.004	–
JPEG2000	0.206	0.001	–
QmapCompression	0.207	0.117	316
I2C	9.114	21.831	576
Ours	0.293	0.310	879

4.2. Implementation details

4.2.1. Model architecture and training

We implement our LIC framework with the *PyTorch* library and conduct all experiments on a single NVIDIA A100 GPU with 80 GB memory under *Python* 3.10. The architecture follows the hybrid Transformer-CNN framework of Liu et al. (2023), employing Swin Transformer blocks (with window sizes of 8 and 4 for main and hyperprior paths, respectively) and latent dimensions of 320 and 192 for y and z , respectively. Training is performed for 80,000 iterations using Kingma and Ba (2014) with a constant learning rate 4×10^{-5} .

4.2.2. WSI preprocessing for training

WSIs are first partitioned into 256×256 patches at $40\times$ magnification. Foreground tissue is identified using the pipeline in CLAM (Lu et al., 2021). These foreground patches are then grouped into training regions of size $1,024 \times 1,024$, each containing 16 patches.

4.2.3. Inference strategies

We employ two distinct inference modes tailored to different downstream tasks:

- **Fixed high-fidelity compression:** For patch- and cell-level tasks that demand maximal detail preservation (patch-level classification, ROI retrieval, and nuclei segmentation), we uniformly assign the highest content score ($q = 1$) to all patches to minimize information loss.
- **Content-aware variable-rate compression:** For WSI-level analyses (subtyping and survival prediction), we employ the proposed content-aware strategy. We generate attention maps using pretrained foundation models, CHIEF (Wang et al., 2024) and TITAN (Ding et al., 2025).

4.3. Experimental protocol

4.3.1. Comparison methods

To benchmark PathoLIC, we compare it against four representative compression algorithms, including two conventional approaches and two learned image compression (LIC) methods:

- **JPEG (Wallace, 2002):** The widely used DCT-based codec, evaluated with quality settings from 10 to 90.
- **JPEG2000 (Taubman et al., 2002):** A wavelet-based standard offering improved performance over JPEG.

- **QmapCompression (Song et al., 2021):** A LIC method using a spatial quality map for fine-grained rate control.
- **I2C (Cai et al., 2024):** An invertible neural network-based codec enabling continuous rate control via normalizing flows.

4.3.2. Evaluation metrics

We assess performance using metrics for both reconstruction fidelity and downstream task preservation.

- **Reconstruction fidelity:** We measure standard image quality using Peak Signal-to-Noise Ratio (PSNR) and Multi-Scale Structural Similarity (MS-SSIM).
- **WSI-level classification:** Performance is evaluated using Accuracy, Balanced Accuracy (BACC), Area Under the Receiver Operating Characteristic Curve (AUROC), and Area Under the Precision-Recall Curve (AUPRC).
- **Survival prediction:** We employ the Concordance Index (C-index) to evaluate the model's ability to correctly rank the survival times of pairs of patients.
- **Patch-level classification:** We report patch-wise aggregated Accuracy, BACC, and AUROC.
- **ROI retrieval:** Following standard protocols used in UNI (Chen et al., 2024), we measure retrieval performance using Top- K Accuracy (ACC@ K) for $K \in \{1, 3, 5\}$ and majority vote of the top-5 retrieved images (MVACC@5).
- **Cell-level segmentation:** We use Dice coefficient, Intersection over Union (IoU), precision, recall, and specificity.

5. Experiments and results

We now present a comprehensive evaluation of the PathoLIC framework. We first assess its fundamental rate-distortion performance and computational efficiency, followed by an in-depth analysis of its impact on a hierarchy of downstream clinical tasks. Finally, we present ablation studies to validate our core architectural components.

5.1. Rate-distortion performance and efficiency

As illustrated in Fig. 5 and summarized in Table 3, PathoLIC consistently outperforms all comparison methods in the high-fidelity setting (0.23–0.46 BPP), which is the most critical for preserving diagnostic information. For instance, at diagnostically relevant rate of 0.28 BPP, PathoLIC achieves a PSNR of 40.6 dB and an MS-SSIM of 0.990, surpassing both QmapCompression (40.2 dB / 0.989) and I2C (39.7 dB / 0.989). Traditional codecs such as JPEG and JPEG2000 excel in speed but suffer from lower reconstruction fidelity. Among the learned approaches, PathoLIC achieves a strong balance of high fidelity, efficient runtime, and moderate model size, making it particularly suitable for real-world digital pathology workflows. QmapCompression offers faster inference but lags behind in R-D performance, whereas I2C demonstrates considerably lower speed due to the large parameter count in its invertible CNN architecture. By contrast, our lightweight transformer design enables efficient processing while maintaining competitive reconstruction quality.

Table 4

WSI-level subtype classification performance on TCGA-BRCA, TCGA-RCC, and TCGA-NSCLC. PathoLIC (guided by CHIEF and TITAN) is benchmarked against the JPEG baseline across diverse input configurations.

Compression Method	Training Input	Test Input	BRCA				RCC				NSCLC			
			BACC	ACC	AUROC	AUPRC	BACC	ACC	AUROC	AUPRC	BACC	ACC	AUROC	AUPRC
-	Original	Original	0.907	0.880	0.943	0.898	0.937	0.952	0.985	0.946	0.961	0.961	0.987	0.979
PathoLIC _{CHIEF}	Original	Compressed	0.907	0.880	0.949	0.919	0.957	0.947	0.985	0.942	0.951	0.952	0.982	0.977
	Compressed	Original	0.937	0.928	0.960	0.930	0.961	0.957	0.995	0.978	0.957	0.956	0.986	0.979
	Compressed	Compressed	0.922	0.933	0.956	0.924	0.964	0.952	0.983	0.947	0.956	0.956	0.987	0.979
PathoLIC _{TITAN}	Original	Compressed	0.916	0.909	0.951	0.884	0.961	0.960	0.985	0.917	0.956	0.957	0.990	0.990
	Compressed	Original	0.905	0.919	0.941	0.883	0.940	0.946	0.992	0.963	0.952	0.952	0.994	0.994
	Compressed	Compressed	0.911	0.928	0.943	0.886	0.959	0.949	0.978	0.921	0.952	0.952	0.991	0.992
JPEG	Original	Compressed	0.893	0.914	0.952	0.910	0.950	0.962	0.986	0.936	0.943	0.959	0.990	0.992
	Compressed	Original	0.890	0.895	0.950	0.909	0.930	0.930	0.993	0.971	0.945	0.937	0.995	0.995
	Compressed	Compressed	0.895	0.876	0.943	0.903	0.952	0.911	0.978	0.933	0.944	0.916	0.991	0.993

Table 5

WSI-level survival prediction performance on TCGA-BRCA and TCGA-NSCLC datasets. The C-Index (Mean $\pm$ Std) is reported to evaluate the robustness of prognostic signals under compression. PathoLIC (guided by CHIEF and TITAN) is benchmarked against the JPEG baseline across diverse input configurations.

Dataset	Compression Method	Training Input	Test Input	C-Index (Mean $\pm$ Std)
BRCA	-	Original	Original	0.665 $\pm$ 0.090
	PathoLIC _{CHIEF}	Original	Compressed	0.658 $\pm$ 0.104
		Compressed	Original	0.673 $\pm$ 0.084
		Compressed	Compressed	0.696 $\pm$ 0.070
	PathoLIC _{TITAN}	Original	Compressed	0.650 $\pm$ 0.110
		Compressed	Original	0.666 $\pm$ 0.089
		Compressed	Compressed	0.688 $\pm$ 0.074
	JPEG	Original	Compressed	0.642 $\pm$ 0.109
		Compressed	Original	0.654 $\pm$ 0.091
		Compressed	Compressed	0.682 $\pm$ 0.069
NSCLC	-	Original	Original	0.600 $\pm$ 0.058
	PathoLIC _{CHIEF}	Original	Compressed	0.587 $\pm$ 0.073
		Compressed	Original	0.591 $\pm$ 0.058
		Compressed	Compressed	0.592 $\pm$ 0.041
	PathoLIC _{TITAN}	Original	Compressed	0.578 $\pm$ 0.078
		Compressed	Original	0.583 $\pm$ 0.062
		Compressed	Compressed	0.583 $\pm$ 0.045
	JPEG	Original	Compressed	0.570 $\pm$ 0.078
		Compressed	Original	0.570 $\pm$ 0.063
		Compressed	Compressed	0.577 $\pm$ 0.043

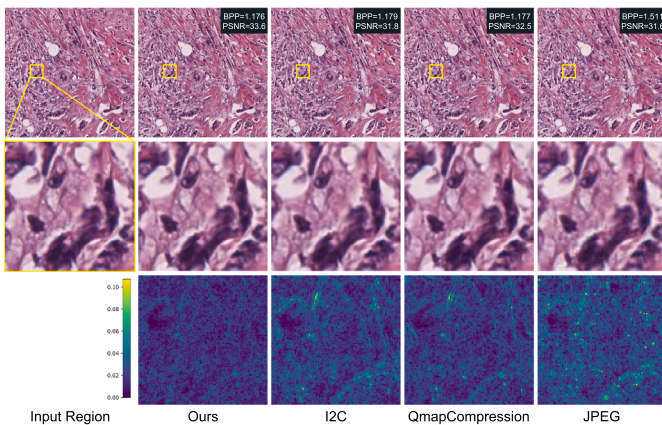


Fig. 7. Region-level comparison across methods. All models are shown at a similar bit-per-pixel (BPP) rate. Notably, even under a lower or comparable BPP, our method achieves higher perceptual quality and preserves more structural details, as reflected by the higher PSNR values and the reduced residuals in the difference maps.

Qualitative effect of rate control. Complementing the quantitative curves, Fig. 6 illustrates the reconstruction quality across different λ values. Higher λ values produce sharper reconstructions with finer texture detail and reduced reconstruction errors, confirming that PathoLIC enables controlled variable-rate compression.

Qualitative comparison at matched bitrate. Fig. 7 compares PathoLIC with representative baselines at a matched bitrate budget. PathoLIC yields fewer visible structural deviations and blocking artifacts in the zoomed regions compared to baselines, which is consistent with the higher MS-SSIM and PSNR values reported in the quantitative analysis.

5.2. Impact on downstream clinical tasks

Preserving diagnostic performance is essential in medical image compression. Consequently, we evaluate PathoLIC across a hierarchy of downstream tasks, including WSI-level subtyping and survival prediction, patch-level classification and ROI retrieval, and cell-level nuclei segmentation.

5.2.1. WSI-level cancer subtyping

We assess the impact of our content-aware compression on cancer subtyping using the Prov-GigaPath foundation model (Xu et al., 2024). Prov-GigaPath employs a two-stage pretraining approach: a tile encoder based on DINOv2 captures local patterns at the patch level, while a slide encoder utilizing the LongNet architecture models global patterns across the entire slide. We evaluate three compression schemes: PathoLIC guided by CHIEF scores (PathoLIC_{CHIEF}), PathoLIC guided by TITAN scores (PathoLIC_{TITAN}), and the standard JPEG codec. For each, we test four scenarios: training and test on original WSIs (i.e., original $\rightarrow$ original), and three other combinations involving compressed data. Besides, Table 2 summarizes the original and compressed sizes of the test sets for TCGA-NSCLC datasets. Notably, PathoLIC_{TITAN} achieves the highest average compression ratio, outperforming both PathoLIC_{CHIEF} and the JPEG baseline.

TCGA-BRCA results (Table 4): In the BRCA dataset, PathoLIC_{CHIEF} demonstrates superior robustness, with the Compressed $\rightarrow$ Original setting yielding improvements across all metrics compared to the uncompressed baseline. PathoLIC_{TITAN} maintains competitive performance (AUROC 0.951) despite its aggressive compression, comparable to JPEG (AUROC 0.952).

TCGA-RCC results (Table 4): High robustness is observed across all methods for RCC subtyping. PathoLIC_{CHIEF} and PathoLIC_{TITAN} achieve AUROCs of 0.985 and 0.985, respectively, in the Original $\rightarrow$ Compressed setting, closely matching the uncompressed performance (0.985) and the JPEG baseline (0.986).

TCGA-NSCLC results (Table 4): For NSCLC, while models trained on original data show slight sensitivity to compression, training on

Table 6

Patch-level classification performance on the BACH dataset across different patch resolutions (512×512 , $1,024 \times 1,024$) and backbone architectures (ResNet-18, ResNet-50). PathoLIC is benchmarked against the JPEG baseline to evaluate the impact of compression artifacts on diagnostic accuracy across diverse input configurations.

Model (patch size)	Compression Method	Training Input	Test Input	ACC	BACC	AUROC	
ResNet-18 (512 × 512)	–	Original	Original	0.749	0.734	0.918	
	PathoLIC	Original	Compressed	0.648	0.641	0.864	
		Compressed	Original	0.669	0.650	0.867	
		Compressed	Compressed	0.684	0.656	0.880	
	JPEG	Original	Compressed	0.637	0.604	0.840	
		Compressed	Original	0.642	0.615	0.843	
		Compressed	Compressed	0.700	0.691	0.884	
	ResNet-50 (512 × 512)	–	Original	Original	0.750	0.741	0.916
		PathoLIC	Original	Compressed	0.631	0.623	0.871
Compressed			Original	0.671	0.634	0.875	
Compressed			Compressed	0.696	0.673	0.886	
JPEG		Original	Compressed	0.630	0.622	0.854	
		Compressed	Original	0.662	0.613	0.862	
		Compressed	Compressed	0.693	0.684	0.888	
ResNet-18 (1,024 × 1,024)		–	Original	Original	0.698	0.666	0.889
		PathoLIC	Original	Compressed	0.625	0.603	0.845
	Compressed		Original	0.663	0.604	0.860	
	Compressed		Compressed	0.685	0.667	0.877	
	JPEG	Original	Compressed	0.629	0.606	0.827	
		Compressed	Original	0.636	0.593	0.811	
		Compressed	Compressed	0.684	0.648	0.865	
	ResNet-50 (1,024 × 1,024)	–	Original	Original	0.730	0.716	0.902
		PathoLIC	Original	Compressed	0.635	0.627	0.847
Compressed			Original	0.660	0.629	0.848	
Compressed			Compressed	0.689	0.679	0.879	
JPEG		Original	Compressed	0.592	0.593	0.825	
		Compressed	Original	0.644	0.615	0.836	
		Compressed	Compressed	0.663	0.659	0.867	

compressed data effectively recovers performance. Notably, PathoLIC_{TITAN} achieves an AUROC of 0.990 in the Original $\rightarrow$ Compressed setting, matching the performance of JPEG (0.990). This confirms that PathoLIC can deliver high-fidelity diagnostic features comparable to standard codecs but with reduced storage overhead.

5.2.2. Survival prediction

We further evaluate PathoLIC on WSI-level survival prediction, a task highly sensitive to global tissue context, using the TCGA-BRCA and TCGA-NSCLC datasets. Table 5 reports the C-index under different Training $\rightarrow$ Test input formats (Original vs. Compressed), enabling a transparent assessment of robustness.

TCGA-BRCA results (Table 5): In the BRCA dataset, the prognostic signals captured by PathoLIC are highly robust. Models trained on original WSIs generalize effectively to compressed slides. Specifically, PathoLIC_{CHIEF} maintains a C-index of 0.696 (Compressed $\rightarrow$ Compressed), which slightly outperforms the JPEG baseline (0.682). Furthermore, PathoLIC_{TITAN} achieves a compelling efficiency-performance trade-off by retaining a comparable C-index (0.688 vs. 0.682) despite a higher compression ratio compared to JPEG. This indicates that our content-aware strategy preserves sparse, critical morphological features required for survival stratification, with better efficiency than standard codecs.

TCGA-NSCLC results (Table 5): Similar trends are observed for the NSCLC dataset, where the advantage of PathoLIC becomes more pronounced. PathoLIC_{CHIEF} achieves a C-index of 0.592 (Compressed $\rightarrow$ Compressed), notably outperforming the JPEG baseline (0.577). This suggests that the blocking artifacts introduced by JPEG may disrupt sub-

tle prognostic features in lung tissue, whereas PathoLIC's learned compression effectively retains the global contextual information necessary for prognostication.

5.2.3. Patch-level histology classification

We next focus on patch-level tasks, which demand fidelity to fine image details. All experiments are conducted with PathoLIC in the fixed high-fidelity setting ($q = 1$). To assess practical utility, we benchmark PathoLIC against the standard JPEG codec, utilizing quality settings calibrated to match the average bitrate of PathoLIC for a fair comparison.

BACH dataset results (Table 6): On the four-class BACH dataset, models trained on original patches exhibit performance degradation when tested on compressed patches (original $\rightarrow$ compressed). However, PathoLIC consistently demonstrates classification accuracy comparable to or exceeding the JPEG baseline across both ResNet-18 and ResNet-50 architectures. Crucially, as detailed in Table 11, PathoLIC yields higher reconstruction quality (PSNR/MS-SSIM) than JPEG at equivalent or lower bitrates (e.g., 39.3 dB vs. 39.0 dB at 1.00 BPP). This indicates that our method preserves diagnostic features with greater fidelity than the standard codec.

In-house dataset results (Table 7): For the simpler binary classification task on the in-house dataset, the impact of compression is less pronounced. PathoLIC achieves robust performance, matching the ceiling accuracy of uncompressed data and performing on par with JPEG. Notably, for $1,024 \times 1,024$ patches, PathoLIC maintains this performance at a highly efficient bitrate (0.59 BPP), underscoring its capability to handle large-context patches.

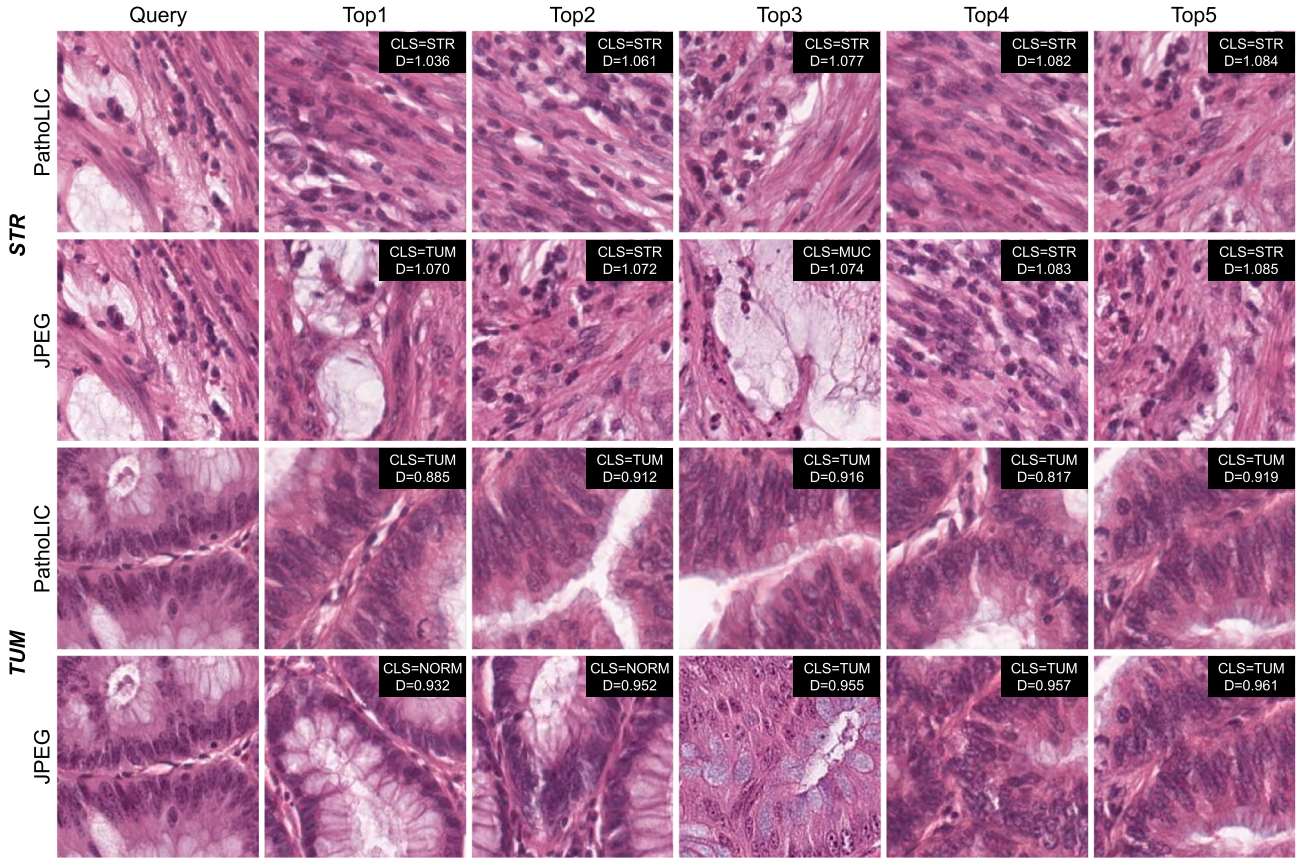


Fig. 8. ROI retrieval visualization on NCT-CRC-HE-100K. The figure displays query patches (left column) and their top-5 retrieved candidates. Rows 1 and 3 present results using PathoLIC, while rows 2 and 4 show results using JPEG. The displayed tissue classes are: STR (Cancer-Associated Stroma), TUM (Colorectal Adenocarcinoma Epithelium), MUC (Mucus), and NORM (Normal Colon Mucosa). Class labels (CLS) and distance metrics (D) are provided for each patch. PathoLIC demonstrates stronger semantic consistency (e.g., in row 3), whereas JPEG exhibits semantic inconsistency (e.g., retrieving normal tissue for a tumor query in row 4).

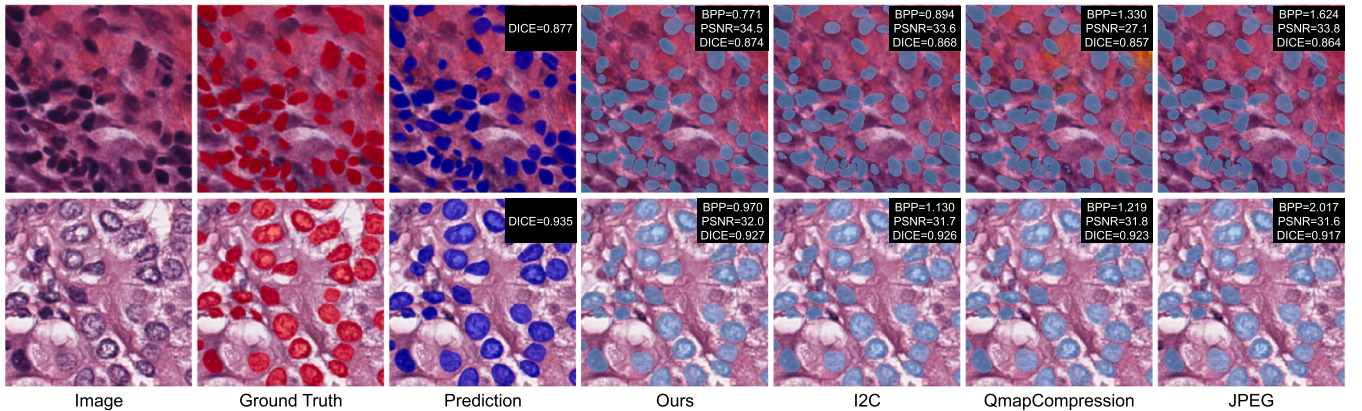


Fig. 9. Qualitative comparison of nuclei segmentation robustness against compression artifacts. The baseline prediction (on uncompressed input) is compared with results from PathoLIC, I2C, QmapCompression, and JPEG. PathoLIC yields segmentation masks closest to the Ground Truth (GT) with higher Dice scores (e.g., 0.927 vs. 0.917 for JPEG).


5.2.4. ROI retrieval

We evaluate patch-level ROI retrieval on the NCT-CRC-HE-100K dataset to verify feature consistency under compression. Given that retrieval relies on fine-grained textural matching, we employ the fixed high-fidelity setting ($q = 1$) for PathoLIC and benchmark it against JPEG.


NCT-CRC-HE-100K results (Tables 8 and 10): PathoLIC demonstrates superior preservation of feature semantics essential for ROI retrieval. As shown in Table 8, PathoLIC achieves Top-1 and Top-5 re-

trieval accuracies nearly identical to the uncompressed upper bound, indicating negligible loss in discriminative feature power. Furthermore, regarding rate-distortion performance (Table 10), PathoLIC outperforms the JPEG baseline by achieving higher reconstruction fidelity (PSNR) at equivalent or lower bitrates.

Visual analysis (Fig. 8): Qualitative results confirm that PathoLIC retrieves semantically relevant patches (e.g., correctly matching specific tumor grades) with high visual fidelity. In contrast, JPEG compression

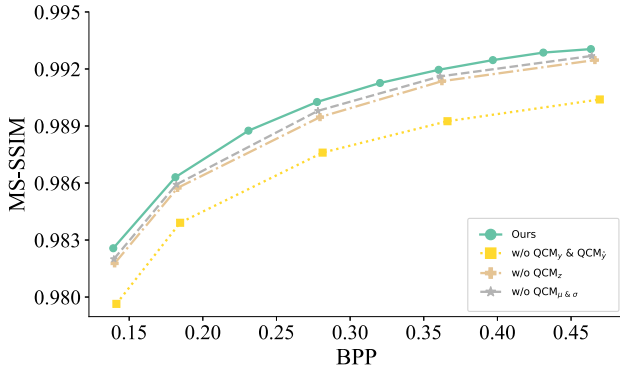


(a) Various rates on MS-SSIM

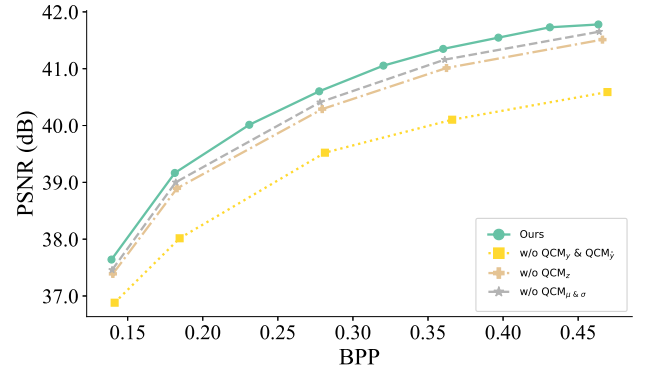


(b) Various rates on PSNR

Fig. 10. Component-wise ablation of QCM shows that removing any submodule (QCM_y & QCM_j, QCM_z, or QCM_{μ&σ}) degrades reconstruction quality across all BPPs.

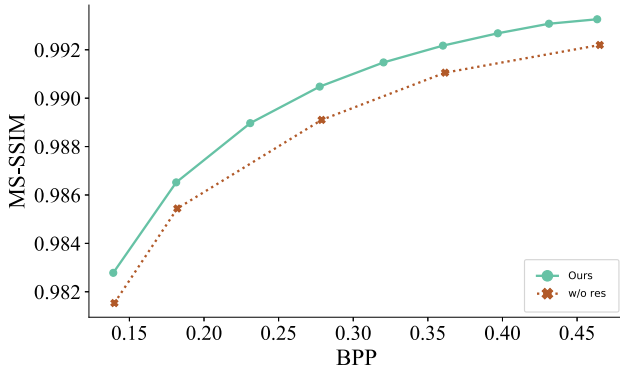

(a) Various rates on MS-SSIM

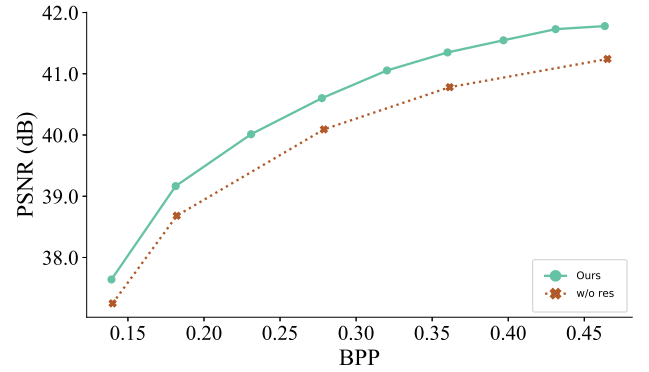

(b) Various rates on PSNR

Fig. 11. Impact of removing the residual connection in the QCM. Disabling the residual path leads to a noticeable drop in both MS-SSIM and PSNR, confirming its importance for stable and high-fidelity feature modulation.

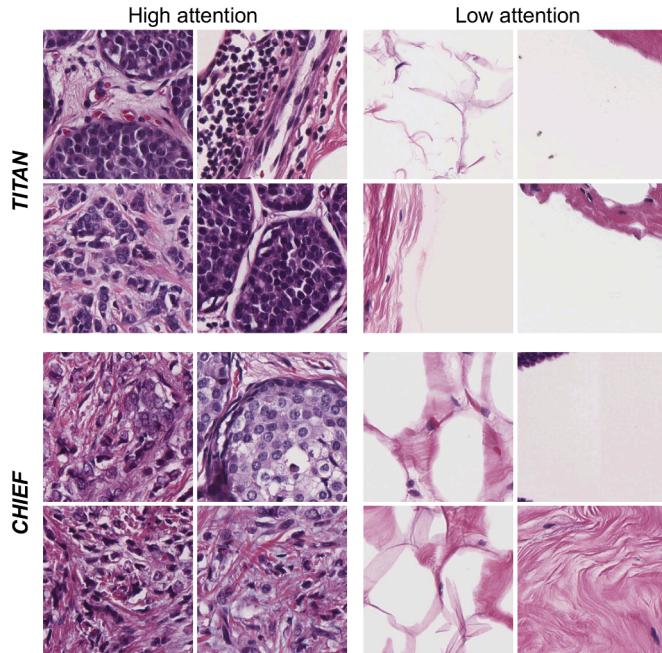


Fig. 12. Patch-level visual verification of content scores. Representative patches with high vs. low attention scores derived from TITAN (top) and CHIEF (bottom) are shown. High attention regions consistently correspond to diagnostic tumor nests and cellular areas. Low attention regions consistently correspond to adipose tissue, stroma, or background.

at matched bitrates introduces visible blocking artifacts that can obscure subtle histological textures.

5.2.5. Cell-level nuclei segmentation

Finally, we assess the preservation of fine-grained cellular structures via a nuclei segmentation task using the nnU-Net framework (Isensee et al., 2021). We also benchmark performance against JPEG under matched bitrate conditions.

PanNuke and MNS results (Table 9): The segmentation results reveal an exceptional level of robustness to our compression. The segmentation results reveal an exceptional level of robustness to our compression. PathoLIC achieves Dice and IoU scores nearly identical to the uncompressed baseline, outperforming JPEG on both PanNuke and the diverse Merged Nuclei Segmentation (MNS) benchmark. This advantage is particularly evident on MNS, where PathoLIC surpasses JPEG while using fewer bits.

Visual analysis (Fig. 9 and Table 12): The quantitative gain is supported by the rate-distortion analysis in Table 12, where PathoLIC demonstrates higher PSNR (e.g., +1.3 dB on MNS) compared to JPEG. Visually, segmentation masks produced from PathoLIC-compressed images are indistinguishable from original inputs (Fig. 9), whereas JPEG compression can introduce blocking artifacts that degrade nuclear boundary definition.

5.3. Impact of foundation model

Our extensive validation confirms that PathoLIC's efficacy is robust to the choice of guiding priors. As visualized in Figs. 4 and 12, although CHIEF and TITAN utilize distinct attention mechanisms, they yield semantically consistent heatmaps, effectively isolating tumor regions from

Table 7

Patch-level classification performance on the in-house dataset. PathoLIC is benchmarked against the JPEG baseline across varying patch resolutions (512×512 , $1,024 \times 1,024$) and backbone architectures (ResNet-18, ResNet-50) to assess the robustness of learned representations under compression.

Model (patch size)	Compression Method	Training Input	Test Input	ACC	BACC	AUROC
ResNet-18 (512 × 512)	–	Original	Original	0.967	0.957	0.995
	PathoLIC	Original	Compressed	0.875	0.835	0.942
		Compressed	Original	0.914	0.896	0.966
		Compressed	Compressed	0.947	0.931	0.987
	JPEG	Original	Compressed	0.888	0.874	0.954
		Compressed	Original	0.908	0.856	0.972
		Compressed	Compressed	0.955	0.949	0.991
	–	Original	Original	0.965	0.958	0.995
	PathoLIC	Original	Compressed	0.901	0.825	0.963
Compressed		Original	0.919	0.912	0.973	
Compressed		Compressed	0.941	0.918	0.988	
JPEG	Original	Compressed	0.855	0.852	0.941	
	Compressed	Original	0.922	0.865	0.981	
	Compressed	Compressed	0.951	0.948	0.990	
ResNet-18 (1,024 × 1,024)	–	Original	Original	0.977	0.967	1.000
	PathoLIC	Original	Compressed	0.977	0.967	1.000
		Compressed	Original	0.977	0.967	1.000
		Compressed	Compressed	0.977	0.967	1.000
	JPEG	Original	Compressed	0.977	0.967	1.000
		Compressed	Original	1.000	1.000	1.000
		Compressed	Compressed	0.977	0.967	0.993
	–	Original	Original	0.977	0.967	1.000
	PathoLIC	Original	Compressed	1.000	1.000	1.000
Compressed		Original	0.977	0.967	1.000	
Compressed		Compressed	0.977	0.967	1.000	
JPEG	Original	Compressed	0.954	0.933	1.000	
	Compressed	Original	0.907	0.867	1.000	
	Compressed	Compressed	0.954	0.933	1.000	

Table 8

ROI retrieval accuracy on the NCT-CRC-HE-100K dataset using UNI (Chen et al., 2024). Top- K and Majority Vote (MVACC) accuracies are reported to assess feature space consistency under compression. PathoLIC is benchmarked against the JPEG baseline across diverse input configurations.

Compression Method	Training Input	Test Input	ACC@1	ACC@3	ACC@5	MVACC@5
–	Original	Original	0.957	0.969	0.972	0.963
PathoLIC	Original	Compressed	0.953	0.971	0.974	0.967
	Compressed	Original	0.963	0.971	0.975	0.964
	Compressed	Compressed	0.968	0.972	0.977	0.970
JPEG	Original	Compressed	0.953	0.973	0.976	0.965
	Compressed	Original	0.963	0.970	0.973	0.965
	Compressed	Compressed	0.967	0.971	0.974	0.967

background stroma. Notably, the framework exhibits an adaptive capability: it automatically calibrates the average file size based on the sparsity of the attention map. The TITAN-driven version achieves higher compression without downstream accuracy loss, confirming that our framework preserves diagnostic integrity across foundation models.

5.4. Ablation study

To validate our architectural design, we further conduct ablation studies focusing on the Quality Control Module (QCM). The results in

Fig. 10 show that each QCM component enhances rate-distortion (R-D) performance. The most pronounced degradation in both MS-SSIM and PSNR occurs when the QCMs modulating the primary latent space (y and $\hat{y}$) are removed, underscoring the critical role of conditioning the main encoder and decoder. In addition, modulating the hyper-prior (z) and the entropy model parameters (μ, σ) yields clear, complementary gains. We further examine the residual connection within the QCM's affine transform. As illustrated in Fig. 11, removing this residual path consistently degrades R-D performance, especially in low-bitrate regimes. This confirms its importance for stable and effective feature modulation.

5.5. Limitations

Despite the demonstrated robustness of PathoLIC, it currently lacks a fully integrated graphical user interface (GUI)-based software solution that supports compression, decompression, and direct visualization of WSIs. In addition, the current implementation does not support the direct integration or modification of pathologist annotations, such as tumor boundaries or tumor classification labels, within the compressed files. Future work will focus on developing a comprehensive, user-friendly GUI platform that unifies these capabilities into a single, end-to-end system, enabling interactive visualization, annotation management, and seamless deployment in clinical workflows.

Table 9

Cell-level nuclei segmentation performance on PanNuke and Merged Nuclei Segmentation (MNS) datasets using the nnU-Net framework. PathoLIC is benchmarked against the standard JPEG baseline across various training and test input configurations.

Dataset	Compression Method	Training Input	Test Input	Dice	IoU	Accuracy	Precision	Recall	Specificity
PanNuke	–	Original	Original	0.834	0.732	0.965	0.854	0.870	0.970
	PathoLIC	Original	Compressed	0.831	0.727	0.965	0.856	0.862	0.971
		Compressed	Original	0.831	0.728	0.964	0.852	0.870	0.970
		Compressed	Compressed	0.834	0.731	0.965	0.853	0.870	0.970
	JPEG	Original	Compressed	0.828	0.723	0.951	0.854	0.859	0.970
		Compressed	Original	0.830	0.726	0.952	0.856	0.860	0.971
		Compressed	Compressed	0.831	0.725	0.951	0.852	0.861	0.969
	–	Original	Original	0.796	0.669	0.964	0.820	0.806	0.964
	MNS	PathoLIC	Original	Compressed	0.792	0.663	0.964	0.816	0.802
Compressed			Original	0.796	0.669	0.964	0.818	0.804	0.963
Compressed			Compressed	0.799	0.673	0.964	0.816	0.804	0.963
JPEG		Original	Compressed	0.785	0.653	0.932	0.807	0.789	0.961
		Compressed	Original	0.792	0.664	0.936	0.819	0.800	0.964
		Compressed	Compressed	0.788	0.658	0.933	0.815	0.787	0.963

Table 10

Quantitative comparison of rate-distortion performance on the NCT-CRC-HE-100K dataset. Reconstruction quality is evaluated using PSNR and MS-SSIM at comparable BPP between PathoLIC and the JPEG baseline across diverse input configurations.

Split	# Patches	Compression Method	BPP	PSNR (dB)	MS-SSIM (%)
Training	100,000	PathoLIC	1.50	32.5	98.6
		JPEG	1.52	31.6	98.3
Test	7,180	PathoLIC	1.40	32.7	98.5
		JPEG	1.41	31.9	98.0

Table 11

Quantitative comparison of rate-distortion performance on the BACH and in-house datasets. Reconstruction quality is evaluated using PSNR and MS-SSIM at comparable BPP between PathoLIC and the JPEG baseline across different patch resolutions.

Setting	# Patches	Compression Method	BPP	PSNR (dB)	MS-SSIM (%)
BACH (512 × 512)	20,641	PathoLIC	1.00	39.3	99.1
		JPEG	1.05	39.0	99.0
BACH (1,024 × 1,024)	5,102	PathoLIC	1.25	35.0	98.9
		JPEG	1.27	34.8	98.1
In-house (512 × 512)	6,568	PathoLIC	0.99	36.6	99.0
		JPEG	1.05	36.1	98.3
In-house (1,024 × 1,024)	205	PathoLIC	0.59	39.2	99.3
		JPEG	0.59	39.0	99.0

Table 12

Quantitative comparison of rate-distortion performance on the PanNuke and MNS datasets. Reconstruction quality is evaluated using PSNR and MS-SSIM at comparable BPP for the images utilized in cell-level nuclei segmentation tasks.

Dataset	# Patches	Compression Method	BPP	PSNR (dB)	MS-SSIM (%)
PanNuke	7,901	PathoLIC	1.10	35.4	98.9
		JPEG	1.14	34.7	98.3
MNS	640	PathoLIC	1.26	33.1	91.9
		JPEG	1.47	31.8	91.4

6. Conclusion

We introduce PathoLIC, a novel content-aware variable-rate framework tailored for whole slide image compression. As the first deep learning-based method to perform content-aware compression on WSIs,

PathoLIC leverages content scores to modulate compression levels throughout the whole slide according to content scores. This approach reduces data redundancy efficiently while preserving fine visual and structural details. Experimental results show that PathoLIC achieves over 8× compression beyond the standard Aperio SVS format, without noticeable loss of image details. Furthermore, it maintains strong performance across various downstream tasks, including patch-level and WSI-level cancer subtyping as well as nuclei segmentation. Overall, PathoLIC provides an efficient solution for managing large-scale pathology archives, and also facilitates broader integration of AI in digital pathology workflows.

CRedit authorship contribution statement

Weiqi Li: Writing – review & editing, Writing – original draft, Methodology, Investigation, Conceptualization; **Yonghao Li:** Writing – review & editing, Methodology; **Haoyuan Chen:** Writing – review & editing; **Long Yang:** Writing – review & editing; **Lin Wu:** Data curation; **Zhenhui Li:** Data curation; **Jing Ke:** Writing – review & editing, Supervision, Conceptualization; **Dinggang Shen:** Writing – review & editing, Supervision, Project administration, Funding acquisition, Conceptualization.

Declaration of competing interest

The authors declare that they have no known competing financial interests or personal relationships that could have appeared to influence the work reported in this paper.

Acknowledgement

This work is supported in part by [National Natural Science Foundation of China](#) (grant numbers 82441023, U23A20295, 62131015, 82394432), the China Ministry of Science and Technology (S20240085, STI2030-Major Projects-2022ZD0209000, STI2030-Major Projects-2022ZD0213100), Shanghai Municipal Central Guided Local Science and Technology Development Fund (No. YDZX20233100001001), and HPC Platform of [ShanghaiTech University](#).

References

- Angell, H.K., Gray, N., Womack, C., Pritchard, D.I., Wilkinson, R.W., Cumberbatch, M., 2013. Digital pattern recognition-based image analysis quantifies immune infiltrates in distinct tissue regions of colorectal cancer and identifies a metastatic phenotype. *Br. J. Cancer* 109 (6), 1618–1624.
- Aresta, G., Araújo, T., Kwok, S., Chennamsetty, S., Safwan, M., Alex, V., Marami, B., Prastawa, M., Chan, M., Donovan, M., et al., 2019. Bach: grand challenge on breast cancer histology images. In: *Medical Image Analysis*. Vol. 56. Elsevier, pp. 122–139.

- Association, D.P., 2019. Digital pathology association whitepaper. <https://digitalpathologyassociation.org/white-papers>.
- Ballé, J., Laparra, V., Simoncelli, E.P., 2017. End-to-end optimized image compression. In: 5th International Conference on Learning Representations, ICLR 2017.
- Ballé, J., Minnen, D., Singh, S., Hwang, S.J., Johnston, N., 2018. Variational image compression with a scale hyperprior. In: International Conference on Learning Representations (ICLR).
- Cai, S., Chen, L., Zhang, Z., Zhao, X., Zhou, J., Peng, Y., Yan, L., Zhong, S., Zou, X., 2024. I2c: Invertible continuous codec for high-fidelity variable-rate image compression. *IEEE Trans. Pattern Anal. Mach. Intell.* 46 (6), 4262–4279.
- Campanella, F., Hanna, M.G., Geneslaw, L., Mirafior, A., Werneck Krauss Silva, V., Busam, K.J., Brogi, E., Reuter, V.E., Klimstra, D.S., Fuchs, T.J., 2019. Clinical-grade computational pathology using weakly supervised deep learning on whole slide images. *Nat. Med.* 25 (8), 1301–1309.
- Chen, R.J., Ding, T., Lu, M.Y., Williamson, D. F.K., Jaume, G., Song, A.H., Chen, B., Zhang, A., Shao, D., Shaban, M., et al., 2024. Towards a general-purpose foundation model for computational pathology. *Nat. Med.* 30 (3), 850–862.
- Cheng, Z., Sun, H., Takeuchi, M., Katto, J., 2020. Learned image compression with discretized gaussian mixture likelihoods and attention modules. In: Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition, pp. 7939–7948.
- Ding, T., Wagner, S.J., Song, A.H., Chen, R.J., Lu, M.Y., Zhang, A., Vaidya, A.J., Jaume, G., Shaban, M., Kim, A., et al., 2025. A multimodal whole-slide foundation model for pathology. *Nat. Med.* 1–13.
- Farahani, N., Parwani, A.V., Pantanowitz, L., 2015. Whole slide imaging in pathology: advantages, limitations, and emerging perspectives. *Pathol. Lab. Med. Int.*, 23–33.
- Gamper, J., Alemi Koohbanani, N., Benet, K., Khuram, A., Rajpoot, N., 2019. Pannuke: an open pan-cancer histology dataset for nuclei instance segmentation and classification. In: European Congress on Digital Pathology. Springer, pp. 11–19.
- Graham, S., Jahanifar, M., Azam, A., Nimir, M., Tsang, Y.-W., Dodd, K., Hero, E., Sahota, H., Tank, A., Benes, K., et al., 2021. Lizard: a large-scale dataset for colonic nuclear instance segmentation and classification. In: Proceedings of the IEEE/CVF International Conference on Computer Vision, pp. 684–693.
- Graham, S., Vu, Q.D., Raza, S. E.A., Azam, A., Tsang, Y.T., Kwak, J.T., Rajpoot, N.M., 2019. Hover-net: simultaneous segmentation and classification of nuclei in multi-tissue histology images. In: International Conference on Medical Image Computing and Computer-Assisted Intervention (MICCAI). Springer, pp. 632–640.
- Hou, L., Samaras, D., Kurc, T.M., Gao, Y., Davis, J.E., Saltz, J.H., 2016. Patch-based convolutional neural network for whole slide tissue image classification. In: Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition, pp. 2424–2433.
- Isensee, F., Jaeger, P.F., Kohl, S.A.A., Petersen, J., Maier-Hein, K.H., 2021. nnU-Net: a self-configuring method for deep learning-based biomedical image segmentation. *Nat. Methods* 18 (2), 203–211.
- Kather, J.N., Halama, N., Marx, A., 2018. 100,000 histological images of human colorectal cancer and healthy tissue. (No Title).
- Kingma, D.P., Ba, J., 2014. Adam: A method for stochastic optimization. *arXiv preprint arXiv:1412.6980*.
- Komura, D., Ishikawa, S., 2018. Machine learning methods for histopathological image analysis. *Comput. Struct. Biotechnol. J.* 16, 34–42.
- Kumar, N., Verma, R., Sharma, S., Bhargava, S., Vahadane, A., Sethi, A., 2017. A dataset and a technique for generalized nuclear segmentation for computational pathology. *IEEE Trans. Med. Imaging* 36 (7), 1550–1560.
- Litjens, G., Kooi, T., Bejnordi, B.E., Setio, A. A.A., Ciompi, F., Ghafoorian, M., Van Der Laak, J.A., Van Ginneken, B., Sánchez, C.I., 2017. A survey on deep learning in medical image analysis. *Med. Image Anal.* 42, 60–88.
- Liu, J., Sun, H., Katto, J., 2023. Learned image compression with mixed transformer-CNN architectures. In: Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition, pp. 1–10.
- Lu, M.Y., Williamson, D. F.K., Chen, T.Y., Chen, R.J., Barbieri, M., Mahmood, F., 2021. Data-efficient and weakly supervised computational pathology on whole-slide images. *Nat. Biomed. Eng.* 5 (6), 555–570.
- Madabhushi, A., Lee, G., 2016. Image analysis and machine learning in digital pathology: challenges and opportunities. *Med. Image Anal.* 33, 170–175.
- Minnen, D., Ballé, J., Toderici, G., 2018. Joint autoregressive and hierarchical priors for learned image compression. In: Advances in Neural Information Processing Systems (NeurIPS), pp. 10771–10780.
- Song, M., Choi, J., Han, B., 2021. Variable-rate deep image compression through spatially-adaptive feature transform. In: Proceedings of the IEEE/CVF International Conference on Computer Vision, pp. 2380–2389.
- Taubman, D.S., Marcellin, M.W., Rabbani, M., 2002. Jpeg2000: image compression fundamentals, standards and practice. *J. Electron. Imaging* 11 (2), 286–287.
- Toderici, G., Vincent, D., Johnston, N., Jin Hwang, S., Minnen, D., Shor, J., Covell, M., 2017. Full resolution image compression with recurrent neural networks. In: Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition, pp. 5306–5314.
- Van der Laak, J. A.W.M., Litjens, G., Ciompi, F., 2021. Deep learning in histopathology: the path to the clinic. *Nat. Rev. Gastroenterol. Hepatol.* 18 (1), 11–24.
- Verma, R., Kumar, N., Patil, A., Kurian, N.C., Rane, S., Graham, S., Vu, Q.D., Zwager, M., Raza, S. E.A., Rajpoot, N., et al., 2021. MonuSAC2020: a multi-organ nuclei segmentation and classification challenge. *IEEE Trans. Med. Imaging* 40 (12), 3413–3423.
- Wallace, G.K., 2002. The JPEG still picture compression standard. *IEEE Trans. Consum. Electron.* 38 (1), xviii–xxxiv.
- Wang, X., Zhao, J., Marostica, E., Yuan, W., Jin, J., Zhang, J., Li, R., Tang, H., Wang, K., Li, Y., et al., 2024. A pathology foundation model for cancer diagnosis and prognosis prediction. *Nature* 634 (8035), 970–978.
- Weinstein, J.N., Collisson, E.A., Mills, G.B., Shaw, K.R., Ozenberger, B.A., Ellrott, K., Shmulevich, I., Sander, C., Stuart, J.M., 2013. The cancer genome atlas pan-cancer analysis project. *Nat. Genet.* 45 (10), 1113–1120.
- Xu, H., Usuyama, N., Bagga, J., Zhang, S., Rao, R., Naumann, T., Wong, C., Gero, Z., González, J., Gu, Y., Xu, Y., Wei, M., Wang, W., Ma, S., Wei, F., Yang, J., Li, C., Gao, J., Rosemon, J., Bower, T., Lee, S., Weerasinghe, R., Wright, B.J., Robicsek, A., Piening, B., Bifulco, C., Wang, S., Poon, H., 2024. A whole-slide foundation model for digital pathology from real-world data. *Nature* 630 (8015), 181–188.
- Zhu, Y., Yang, Y., Cohen, T., 2022. Transformer-based transform coding. In: International Conference on Learning Representations.