



Towards a universal JPEG lossless recompression foundation model for pathology images: A transformer context modeling approach[☆]

Tao Song^{a,c,1}, Rong Tao^{b,1}, Chunyan Wu^b, Mengmeng Zhao^b, Jiajun Deng^b, Yi Guo^a, Feng Xu^a, Chang Chen^{b,*}, Kun Qian^{d,e,1D,**,*}

^a School of Information Science and Technology, Fudan university, Shanghai, China

^b Department of Thoracic Surgery, Shanghai Pulmonary Hospital, Tongji University School of Medicine, Shanghai, China

^c Shanghai Artificial Intelligence Lab, Shanghai, China

^d SenseTime Research, Hong Kong Special Administrative Region of China

^e CHUK MMLab, Hong Kong Special Administrative Region of China

ARTICLE INFO

Keywords:

Pathology image
JPEG lossless recompression
Foundation model
Transformer-based

ABSTRACT

Lossless recompression of JPEG images remains fundamentally constrained by the limited modeling capacity of traditional context-mixing entropy estimators, yielding suboptimal compression ratios. Recently, CNN-based learned recompression methods have demonstrated improved entropy modeling by exploiting the strong representational capacity of deep networks. However, their reliance on local convolutional operations restricts long-range dependency modeling and limits generalization across diverse image domains. In this study, we introduce a Universal Pathology JPEG Lossless Recompression Foundation Model (ULRFM), a transformer-based architecture explicitly designed to build long-range contextual dependencies within JPEG DCT coefficient streams. Leveraging a large-scale pathology dataset comprising more than nine million image tiles across multiple cancers and multiple organs, we systematically investigate the effects of model capacity and data quantity on lossless recompression performance. Extensive experiments demonstrate that ULRFM substantially outperforms existing CNN-based learned recompression approaches in both compression efficiency and cross-distribution generalization. ULRFM provides a maximum file size reduction of 34.13% relative to the original JPEG format, highlighting its potential to markedly alleviate the growing storage burden in digital pathology infrastructures.

1. Introduction

Pathological whole-slide images (WSIs) are typically have gigapixel resolution, imposing substantial burdens on storage and data transmission infrastructure. To alleviate these demands, manufacturers commonly employ standard lossy JPEG compression under strict diagnostic quality constraints (Goode et al., 2013). Although this reduces storage to several extent, the rapid accumulation of pathology images continues to exert pressure on storage systems. As further lossy compression is unsuitable due to potential degradation of diagnostic fidelity, applying a secondary lossless recompression to already JPEG compressed images has become increasingly crucial in modern digital pathology pipelines.

JPEG compression (Wallace, 2002) quantizes luma and chroma components in the discrete cosine transform (DCT) domain and subsequently encodes the quantized coefficients using Huffman coding (Huffman, 2006). Two factors inherently limit the efficiency of this pipeline: (1) the quantization process introduces additional data redundancy, and (2) Huffman coding (Huffman, 2006) is less efficient than more advanced entropy coding schemes such as arithmetic coding (Witten et al., 1987) or asymmetric numeral systems (ANS) (Duda, 2013; Duda et al., 2015). Consequently, JPEG bitstreams retain considerable potential for further compression. Existing solutions attempt to exploit this potential through improved coding strategies or context-mixing mechanisms, such as Lepton (Horn et al., 2017), JPEG XL (Alakuijala et al., 2019, 2020), and CMIX.² Among them, Lepton and JPEG XL are

[☆] This article is part of a Special issue entitled: 'Foundation Models for Computational Pathology' published in Medical Image Analysis.

* Corresponding author.

** Corresponding author at: SenseTime Research, Hong Kong Special Administrative Region of China.

E-mail addresses: changchenc@tongji.edu.cn (C. Chen), kqian@cuhk.edu.hk (K. Qian).

¹ Equal Contribution.

² <https://www.byronknoll.com/cmixon.html>

specifically developed for JPEG recompression, whereas CMIX is a general purpose compressor. Despite their effectiveness, these approaches rely heavily on hand crafted heuristics, fundamentally constraining their ultimate compression performance.

Recent advances in learned JPEG lossless recompression have been driven by convolutional neural networks (CNNs). Guo et al. (2022) introduced a CNN-based Laplacian entropy model combined with modern coding frameworks, achieving measurable reductions in bitrates. Fan et al. (2022) employed an end-to-end learnable lossy transform coding architecture to reduce redundancy within the DCT domain. Eff-Net (Guo et al., 2023) proposed a multi-level parallel conditional modeling network that constructs Gaussian entropy models for luma and chroma components, thereby improving compression ratios while maintaining low latency. More broadly, large-scale foundation models H. Wang et al. (2025), Liu et al. (2024), Zhang and Metaxas (2024), Zhang et al. (2026), X. Wang et al. (2025, 2024) have achieved remarkable success across natural language processing, computer vision, and biomedical image analysis, demonstrating strong capabilities in representation learning, transferability, and cross-domain generalization. In computational pathology, such models have also shown promise in diagnostic and prognostic tasks by capturing morphology-aware representations from gigapixel whole-slide images. Although CNN-based models outperform traditional approaches on natural image benchmarks, they remain limited by two major factors: (1) CNNs predominantly model local spatial dependencies and are less capable than transformer architectures in capturing long-range interactions, which are critical for accurate entropy modeling; and (2) the lack of investigation on large-scale, heterogeneous datasets limits the assessment of generalization, thereby hindering their practical deployment in real-world scenario.

In response to these limitations, we introduce a Universe Pathology JPEG Lossless Recompression Foundation Model (ULRFM). The core innovation of ULRFM lies in its transformer-based context model, which explicitly models long-range dependencies among DCT quantized coefficients to enable substantially more accurate entropy estimation and, consequently, more effective compression. Built upon the previous framework (Guo et al., 2023), ULRFM reconstructs independent transformer-based context models for luma and chroma components. As show in Fig. 1, each component first passes through a dedicated hyper-network to generate side information, which is subsequently utilized as conditional input to the corresponding context model. This parallelized design reduces transformer sequence length and computational cost without compromising modeling power. Importantly, research on lossless recompression of pathological JPEG images remains scarce, and no existing work has explored this problem at scale. This gap limits the feasibility of learned compression techniques in clinical workflows. To the best of our knowledge, we present the first foundation model solution for large-scale pathology JPEG lossless recompression, systematically examine the impact of data quantity and model capacity on compression performance, and substantially surpass prior CNN-based approaches while demonstrating robust out-of-distribution generalization.

The main contributions of this work are summarized as follows:

- (1) To the best of our knowledge, this is the first foundation model specifically designed for pathology image JPEG lossless recompression.
- (2) We propose a transformer-based context modeling framework that captures long-range dependencies among DCT coefficients, enabling more accurate entropy estimation and improved compression efficiency.
- (3) We provide the first systematic investigation into how data quantity and model capacity influence the performance of transformer-based JPEG recompression model.

- (4) We conduct extensive experiments across multi-organ and multi-cancer in-distribution pathology datasets as well as multiple out-of-distribution benchmarks. Results demonstrate that our approach significantly surpasses CNN-based learned methods, setting a new state of the art while exhibiting strong out-of-distribution generalization.

2. Related works

2.1. Overview of JPEG compression

The JPEG compression pipeline begins by converting an RGB image into the YCbCr color space, which comprises one luma component (Y) and two chroma components (Cb and Cr). Because chromatic information is generally less perceptually critical than luma detail, the chroma channels are commonly subsampled. The most widely used configuration is YCbCr 4:2:0, in which the Y component is preserved at full resolution, whereas the Cb and Cr components are downsampled to one quarter of their original spatial resolution (Wallace, 2002). This study focuses on this most commonly used YCbCr 4:2:0 subsampling configuration.

Following subsampling, each component is partitioned into nonoverlapping 8×8 blocks, and each block is transformed into the frequency domain via the DCT, yielding an 8×8 matrix of DCT coefficients. These coefficients are subsequently quantized using specific quantization tables. Finally, the quantized DCT coefficients are coded by lossless Huffman coding (Huffman, 2006) to produce the final JPEG bitstream.

2.2. Lossless JPEG recompression

To address the issues of quantization redundancy and the limited efficiency of Huffman coding (Huffman, 2006) in the JPEG compression pipeline, researchers have developed several traditional JPEG lossless recompression methods, most notably Lepton (Horn et al., 2017) and JPEG XL (Alakuijala et al., 2019, 2020). Lepton replaces JPEG's Huffman coding (Huffman, 2006) with more efficient arithmetic coding (Witten et al., 1987) and employs a context adaptive probability model that is dynamically updated in real time based on the structure of the JPEG bitstream and previously coded data. This enables more accurate probability estimation and achieves an additional compression ratio of about 20%. JPEG XL substitutes the fixed 8×8 DCT blocks in JPEG with a variable-block DCT representation, thereby further reducing quantization redundancy, and integrates asymmetric numeral systems (ANS) (Duda, 2013; Duda et al., 2015) in place of Huffman coding. In addition, the general-purpose compressor CMIX can also perform secondary lossless recompression of JPEG images. CMIX is characterized by the use of a large number of contextual features for prediction. However, compared with Lepton and JPEG XL, it does not yield a substantial gain in compression ratio, while incurring significantly higher computational complexity and much slower running speed.

In recent years, CNN-based JPEG lossless recompression has attracted increasing attention, leveraging the powerful modeling capacity of deep neural networks. Guo et al. (2022) were the first to propose a CNN-based entropy model directly in the DCT domain, learning the probability distribution of quantized DCT coefficients, thereby narrowing the gap between the estimated and true data distributions. Their work demonstrated that directly compressing in the DCT domain has clear advantages over operating in the pixel domain, yielding an improvement in compression rate of approximately 30%. Fan et al. (2022) introduced an end-to-end learnable lossy transform that maps DCT coefficients to a more compact representation, effectively eliminating redundancy introduced by DCT quantization. They then jointly encode the transformed representation and the residual between the lossy reconstruction and the original coefficients, achieving an average

a. Overview of Universe JPEG Lossless Recompression Foundation Model

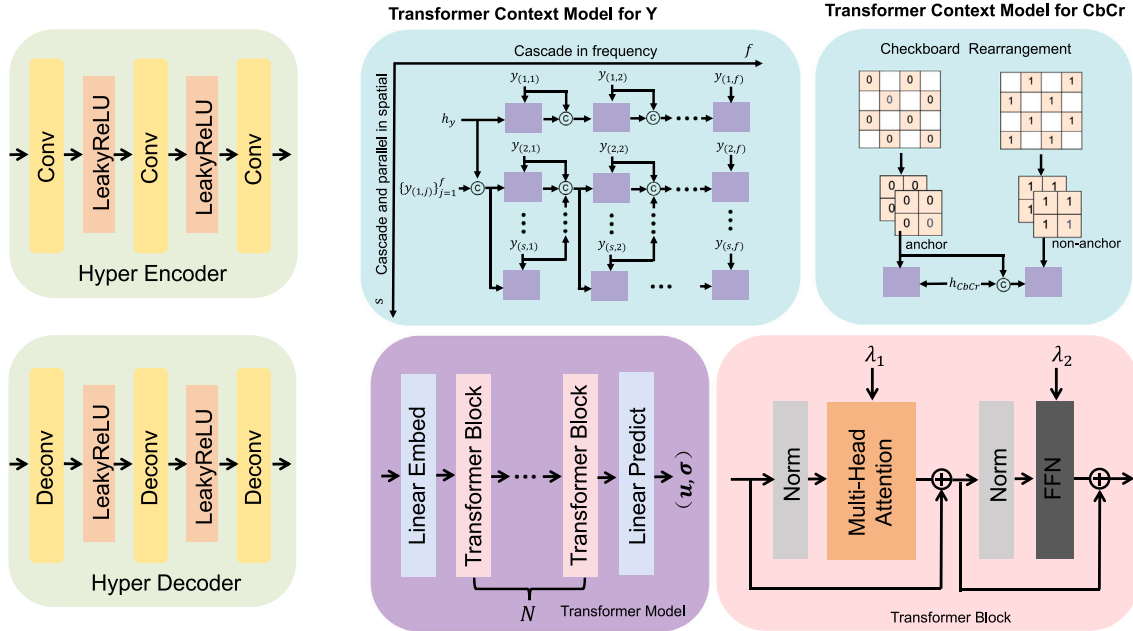
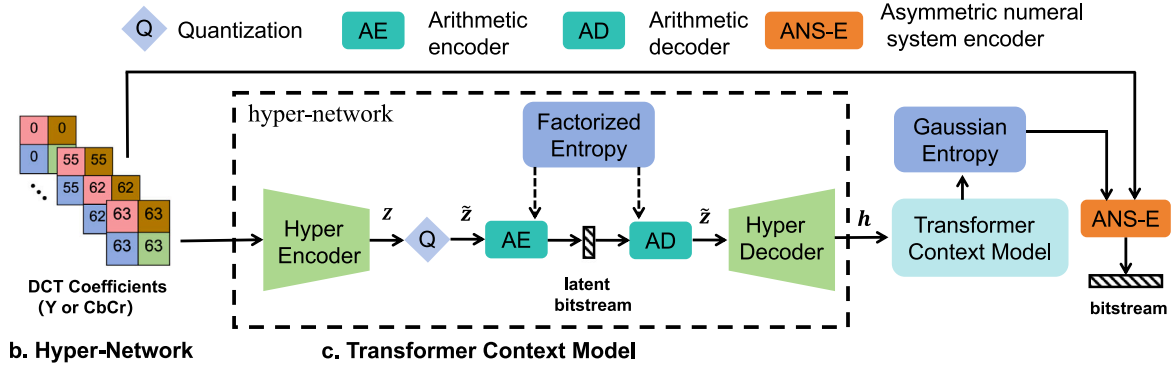


Fig. 1. Overview of the Proposed Universe Pathology JPEG Lossless Recompression Foundation Model. For the luma (Y) and chroma (Cb and Cr) components, each component comprises a hyper-network and a Transformer-based context model. The hyper-network extracts side information to learn global correlation priors, while the Transformer context model establishes long-range dependencies among coefficients to capture fine-grained local details and further reduce redundancy. The primary workflow proceeds as follows: the hyper-network encodes the DCT coefficients and quantizes them into $\tilde{z}$, which is subsequently compressed into a bitstream using an Arithmetic Encoder (AE). Subsequently, an Arithmetic Decoder (AD) decompresses the bitstream and generates the side information h . The Transformer context model exploits the obtained side information to estimate the entropy of each DCT coefficient, and then performs lossless compression of the DCT coefficients using the estimated entropy in conjunction with an Asymmetric Numeral System Encoder (ANS-E).

compression ratio improvement of about 21.49% over standard JPEG. In [Guo et al. \(2023\)](#), the authors proposed a multi-level parallel conditional modeling framework that enables parallel coding of the luma and chroma components, significantly reducing coding latency while maintaining a compression ratio gain of roughly 30%. Nonetheless, their evaluation metrics for compression rates are often compromised by their development on limited natural image datasets.

Furthermore, even though Convolutional Neural Networks (CNNs) have been leveraged for modeling DCT coefficient probability distributions, they predominantly capture local relationships. As a result, their representational capacity is generally inferior to that of transformer architectures, which are designed to model long-range dependencies. Moreover, these JPEG lossless recompression methods have not been thoroughly investigated on large-scale and heterogeneous datasets, making it difficult to rigorously validate their generalization ability and effectiveness, thereby impeding their deployment in real-world applications. In this study, we present a foundation model designed for lossless recompression of pathological images. Its performance is rigorously evaluated on a large-scale dataset to demonstrate its efficacy in real diagnostic workflows.

2.3. Pathology foundation model

The rapid advancement in pathology digitization has led to an exponential increase in the availability of Whole Slide Images (WSIs), thereby establishing a robust foundation for developing powerful and effective models to support computer-aided diagnosis and analysis. The current landscape of pathology foundation models is largely defined by two prominent paradigms: vision-centric models [Ma et al. \(2026\)](#), [Zhou et al. \(2026\)](#) and multimodal models [Chen et al. \(2025\)](#), [Zhong et al. \(2025\)](#), [J. Lu et al. \(2024\)](#), [Hua et al. \(2025\)](#).

Vision-centric foundation models are predominantly built upon Vision Transformers (ViTs) combined with self-supervised learning (SSL) on WSIs. Representative works such as Virchow ([Vorontsov et al., 2024](#)) and its successors Virchow2 and Virchow2G ([Zimmermann et al., 2024](#)) employ large ViT backbones with DINOv2 ([Oquab et al., 2023](#)) training and morphology-preserving augmentations. This approach effectively captures rich spatial dependencies crucial for pathological analysis. Subsequent models further refine this paradigm along several key dimensions, including: (1) Enhancements at the SSL level, where methods like UNI ([Chen et al., 2024](#)), BROW ([Wu et al., 2023](#)),

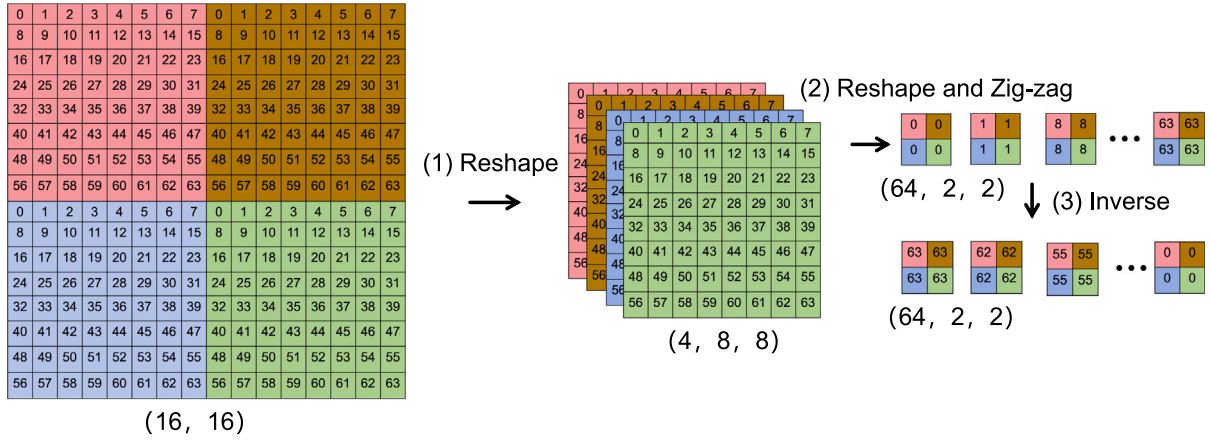


Fig. 2. Data Preprocessing. Taking a 16×16 images as an example, four 8×8 DCT blocks are processed according to frequency, zigzag scanning, and inverse ordering.

Pathorchestra [Yan et al. \(2025\)](#) and Hibou ([Nechaev et al., 2024](#)) extend the DINO/DINOv2 framework with techniques such as self-distillation, masked image modeling (MAE) ([He et al., 2022](#)), and stain-specific augmentations (e.g., RandStainNA [Shen et al., 2022](#)) to improve robustness against staining variability and generalize across tissues and stains; (2) Contributions at the data and domain knowledge level, exemplified by RudolfV ([Dippel et al., 2024](#)), which leverages expert-curated, heterogeneous datasets for tumor microenvironment analysis and biomarker prediction; and (3) Architectural and task-level innovations, such as Prov-GigaPath ([H. Xu et al., 2024](#))’s two-stage design with tile-level pretraining and long-range slide-level encoding, and Kaiko-ai ([Aben et al., 2024](#))’s online patching for scalability. Furthermore, aggregation modules like OmniScreen ([Y.K. Wang et al., 2024](#)) and COBRA ([Lenz et al., 2025](#)) utilize attention-based or Mamba-based ([Gu and Dao, 2024](#); [Rahman et al., 2024](#)) mechanisms for effective slide-level representations.

Complementing these visual models, multimodal foundation models integrate visual and textual data, ushering in an era of more profound and comprehensive pathological analysis. Key developments include PathoDuet ([Hua et al., 2024](#)) and Madeleine ([Vaidya et al., 2025](#)), which are founded on SSL frameworks specifically engineered for H&E and IHC images. mSTAR ([Y. Xu et al., 2024](#)) seamlessly integrates visual and textual information to enrich analytical depth. While HistGen ([Guo et al., 2024](#)) focuses on report generation via Multiple Instance Learning, TITAN ([Ding et al., 2025](#)) employs a three-stage strategy leveraging iBOT ([Zhou et al., 2021](#)) for visual learning and CoCa ([Yu et al., 2022](#)) for multimodal vision-language alignment. The integration of large language models with vision encoders is further exemplified by PathChat ([M.Y. Lu et al., 2024](#)) and PRISM ([Shaikovski et al., 2024](#)).

Despite these remarkable advancements across various downstream pathological analysis tasks, a critical research gap persists. None of the existing foundation models have been proposed specifically for lossless compression of pathological images. The ever-growing storage demands in digital pathology infrastructure necessitate efficient and lossless compression strategies to manage the enormous data volume. In this work, we introduce a novel foundation model explicitly designed for lossless compression of pathological images, trained on a large-scale dataset, thereby laying a crucial foundation for practical deployment in real-world clinical settings and directly addressing this unmet need for storage efficiency.

3. Method

The overall structure of the proposed ULRFM is illustrated in [Fig. 1](#). For the luma (Y) and chroma (Cb and Cr) components, each component consists of a Hyper-Network and a Transformer Context Model,

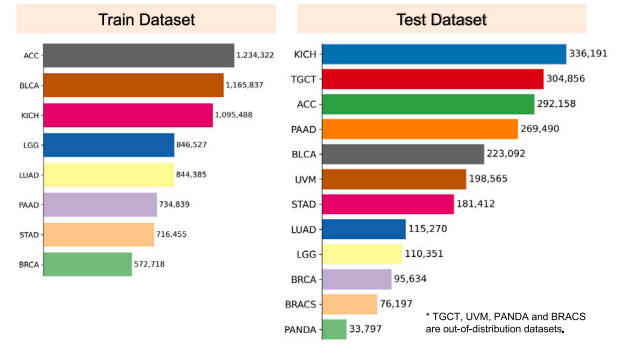


Fig. 3. Comprehensive visualization of the distribution characteristics and sample quantities across the training and test datasets.

although the Context Models differ slightly between luma and chroma. The Hyper-Network extracts side information to learn a global correlation prior, while the Transformer Context Model establishes long-range dependencies among coefficients in order to capture finer local details and further reduce redundancy. Specifically, the luma Transformer Context Model performs partitioning in both spatial and frequency directions, whereas the chroma Context Model employs a checkerboard spatial reassembly. It is important to note that the two chroma channels (Cb and Cr) are concatenated along the channel dimension and processed by the same network in parallel with the luma branch, which significantly lowers the computational overhead of the attention mechanism. Based on our foundation model, we have constructed a dataset of more than nine million image tiles, covering ten cancers from ten organs.

3.1. Preprocessing

JPEG encoders first partition an input image into non-overlapping 8×8 pixel blocks and transform each block via the DCT into an 8×8 coefficient matrix. In this matrix, each coefficient theoretically corresponds to a specific frequency: the top-left element is the DC component, and the remaining 63 elements are AC components. As illustrated in [Fig. 2](#), for a 16×16 example image we collect the DCT outputs of its four blocks and reshape them into a single $4 \times 8 \times 8$ tensor. Because DCT coefficient matrices contain substantial redundancy, we apply a zig-zag scan to each 8×8 block along the channel dimension, clustering zero-valued coefficients and emphasizing structurally informative elements to aid network learning. Following [Guo](#)

Table 1

Summary of datasets, organ types, tissue types, the number of WSIs, and the corresponding number of 256×256 tiles.

Dataset	Organ type	Tissue type	#WSIs	#Tiles
BRCA	Breast	Breast Invasive Cancer	100	668,352
KICH	Kidney	Kidney Chromophobe	115	1,431,679
STAD	Stomach	Stomach Adenocarcinoma	91	897,867
ACC	Adrenal gland	Adrenocortical Carcinoma	99	1,526,480
PAAD	Pancreas	Pancreatic Adenocarcinoma	99	1,004,329
BLCA	Bladder	Bladder Cancer	100	1,388,929
LUAD	Bronchus and lung	Lung Adenocarcinoma	95	959,655
LGG	Brain	Lower Grade Glioma	107	956,878
TGCT	Testicular	Testicular Germ Cell Tumors	30	304,856
UVM	Eye	Uveal Melanoma	30	198,565
PANDA	Prostate	Prostate Cancer	100	33,797
BRACS	Breast	Breast Cancer	10	76,197

et al. (2023), we then reshape this tensor so that coefficients of the same frequency are aggregated across spatial locations, while different frequencies are aligned along the channel dimension. An inverse re-ordering along the frequency axis finally arranges the coefficients from high to low frequency. This frequency representation facilitates more accurate estimation of entropy model from the side information.

3.2. Hyper-network

The design of the hyper-network follows Guo et al. (2022, 2023), which is divided into a Hyper Encoder and a Hyper Decoder. The Hyper Encoder adopts the architecture: Conv $\rightarrow$ LeakyReLU $\rightarrow$ Conv $\rightarrow$ LeakyReLU $\rightarrow$ Conv, where the first convolutional layer employs a stride of 1, while the remaining convolutional layers utilize a stride of 2. The Hyper Decoder comprises Conv $\rightarrow$ LeakyReLU $\rightarrow$ Deconv $\rightarrow$ LeakyReLU $\rightarrow$ Deconv, where Deconv denotes a transposed convolution layer. Specifically, the first and second deconvolutional layers employ a stride of 2, while the final deconvolutional layer adopts a stride of 1. As illustrated in Fig. 1, the overall computational pipeline proceeds as follows: the DCT coefficient array is encoded through the Hyper Encoder to obtain the latent feature $\mathbf{z}$. Subsequently, $\mathbf{z}$ is quantized via `torch.round` to yield $\tilde{\mathbf{z}}$. Finally, the Hyper Decoder produces the side information $\mathbf{h}$. To maintain unimpeded gradient flow during back-propagation through the quantization operation, the `quantize_STE` function is utilized, which approximates the gradient via the derivative of the identity function (straight-through estimator) (Theis et al., 2017). It is noteworthy that the side information must also be encoded as a bitstream to provide conditional information for subsequent decompression. Specifically, a factorized entropy model (Ballé et al., 2018; Minnen et al., 2018) is employed to compress $\tilde{\mathbf{z}}$ into a bitstream.

3.3. Transformer context model

Transformer Context Model for CbCr. We adopt the Checkboard Rearrangement context modeling approach proposed by (Guo et al., 2023), which mitigates the spatial redundancy in computations inherent to the original checkboard context model. To ensure the long-range dependency modeling capability of the context model, the entire context model is implemented using pure Transformer architecture. As illustrated in Fig. 1, the CbCr coefficients are first partitioned into anchor and non-anchor regions according to their spatial positions. Subsequently, the anchor and non-anchor regions are spatially rearranged to eliminate vacant regions. Specifically, the anchor region is conditioned on $\mathbf{h}$ (the side information of CbCr) and fed into a Transformer model to learn the mean and scale parameters of a Gaussian entropy model, thereby enabling the compression of the anchor region. The non-anchor region, in turn, is conditioned on both $\mathbf{h}$ and the anchor region, and is processed by a separate Transformer model that learns a new Gaussian entropy model for compressing the non-anchor region.

Transformer Context Model for Y. We propose a transformer-based context model to learn more powerful Gaussian entropy models for each subregion in both spatial and frequency directions. As illustrated in Fig. 1, we partition the DCT coefficient matrix $\mathbf{Y}$ into $s \times f$ subregions by dividing it into s rows in the spatial direction and f columns in the frequency direction. For each subregion, we employ an independent transformer model to characterize the corresponding Gaussian entropy. Specifically, the first subregion $y_{(1,1)}$ utilizes the side information $\mathbf{h}$ decoded from $\tilde{\mathbf{z}}$ via the Hyper Decoder as conditional input to a transformer model, which learns the mean and scale parameters of the Gaussian entropy for compression. Once $y_{(1,1)}$ is compressed, the subsequent subregion $y_{(1,2)}$ in the frequency direction takes both $y_{(1,1)}$ and the side information $\mathbf{h}$ as conditional inputs to its corresponding transformer model for entropy modeling. This process continues sequentially, where each subsequent $y_{(1,f)}$ conditions on both $\{y_{(1,j)}\}_{j=1}^{f-1}$ and $\mathbf{h}$. Upon completion of entropy modeling for the first spatial subregion across all frequency directions, the remaining $s-1$ spatial subregions are modeled in a similar manner. Notably, $y_{(i,j)}$ depends not only on the side information $\mathbf{h}$ but also on the previously modeled coefficients $y_{<(i,j)}$, and this dependency pattern continues recursively for subsequent subregions. As illustrated in Algorithm 1, the decoding process reconstructs the DCT coefficient matrix $\mathbf{Y}$ from its compressed bitstream $\tilde{\mathbf{Y}}$ and the hyper-prior bitstream $\tilde{\mathbf{z}}$. In this experiment, we configure $s = 4$ and $f = 9$. The spatial partitioning yields 4 rows, while the frequency partitioning yields 9 columns with lengths [28, 8, 7, 6, 5, 4, 3, 2, 1] respectively. The cumulative length across all frequency columns is 64, which corresponds to 64 frequency coefficients in total.

Algorithm 1 ULRFM: Decoding Process with Y

```

1: Input: Side information bitstream  $\tilde{\mathbf{z}}$  and compressed bitstream  $\tilde{\mathbf{Y}}$ .
2: Output: Reconstructed DCT coefficient matrix  $\mathbf{Y}$ .
3: Requires: Hyper-Decoder, ANS Decoder and Transformer Context Model with  $\{TM_{(i,j)}\}_{i=1,j=1}^{s,f}$ .
4: # Step 1: Initialize side information  $\mathbf{h}$  and Condition  $C$ .
5:  $\mathbf{h} = \text{HyperDecoder}(\tilde{\mathbf{z}})$ 
6:  $C = \mathbf{h}$ 
7: # Step 2: Sequentially process the first spatial row.
8: for  $j = 1$  to  $f$  do
9:    $(\mu_{(1,j)}, \sigma_{(1,j)}) = TM_{(1,j)}(C)$ 
10:   $y_{(1,j)} = \text{ANSDecoder}(\mathcal{N}(\mu_{(1,j)}, \sigma_{(1,j)}), \tilde{\mathbf{Y}})$ 
11:   $C = C \cup y_{(1,j)}$ 
12: end for
13: # Step 3: Process remaining spatial rows in parallel.
14: for  $j = 1$  to  $f$  do
15:   $\{(\mu_{(i,j)}, \sigma_{(i,j)})\}_{i=2}^s = \{TM_{(i,j)}(C)\}_{i=2}^s$ 
16:   $\{y_{(i,j)}\}_{i=2}^s = \{\text{ANSDecoder}(\mathcal{N}(\mu_{(i,j)}, \sigma_{(i,j)}), \tilde{\mathbf{Y}})\}_{i=2}^s$ 
17:   $C = C \cup \{y_{(i,j)}\}_{i=2}^s$ 
18: end for
19:  $\mathbf{Y} = \{y_{(i,j)}\}_{i=1,j=1}^{s,f}$ 
20: return  $\mathbf{Y}$ 

```

3.4. Large-scale database

An extensive dataset of image tiles forms the foundation of our model. In this study, leveraging the publicly available TCGA dataset,³ PANDA (Bulten et al., 2022), and BRACS datasets (Brancati et al., 2022), we have constructed, to our knowledge, the largest multi-organ and multi-cancer image tiles for JPEG lossless recompression. As summarized in Table 1, the dataset comprises 976 WSIs spanning eleven cancer types from eleven organs, yielding approximately ten million

³ <https://portal.gdc.cancer.gov/>

Table 2

Comparison of existing methods on in-distribution and out-of-distribution datasets, evaluated using BPP and Compression Saving (%) under YCbCr 4:2:0 at quality 75.

Metric	BPP and Compression Saving(%)											
Method	JPEG		JPEG XL (Alakuijala et al., 2019)		Lepton (Horn et al., 2017)		Guo (Guo et al., 2022)		Eff-Net (Guo et al., 2023)		Ours	
Dataset												
In-distribution												
ACC	2.233	–	1.932	13.48%	1.885	15.58%	1.790	19.84%	1.670	25.21%	1.482	33.63%
BLCA	2.197	–	1.899	13.54%	1.846	15.93%	1.770	19.36%	1.646	25.08%	1.456	33.66%
BRCA	2.010	–	1.745	13.14%	1.676	16.57%	1.672	16.77%	1.531	23.83%	1.324	34.13%
KICH	1.976	–	1.716	13.24%	1.651	16.32%	1.620	17.98%	1.486	24.73%	1.310	33.68%
LGG	2.248	–	1.930	14.06%	1.881	16.24%	1.837	18.19%	1.716	23.55%	1.541	31.32%
LUAD	2.123	–	1.827	14.02%	1.767	16.77%	1.752	17.45%	1.618	23.73%	1.434	32.42%
PAAD	2.096	–	1.819	13.27%	1.763	15.94%	1.679	19.94%	1.560	25.48%	1.390	33.68%
STAD	2.088	–	1.800	13.85%	1.742	16.57%	1.708	18.25%	1.592	23.73%	1.415	32.39%
Out-of-distribution												
TGCT	2.024	–	1.754	13.34%	1.692	16.39%	1.683	16.84%	1.550	23.37%	1.343	33.64%
UVM	2.039	–	1.760	13.53%	1.705	16.38%	1.721	15.69%	1.592	21.97%	1.384	32.17%
PANDA	1.780	–	1.544	13.26%	1.482	16.74%	1.326	25.51%	1.317	26.01%	1.216	31.69%
BRACS	1.867	–	1.648	11.73%	1.596	14.52%	1.366	26.83%	1.313	29.67%	1.244	33.37%

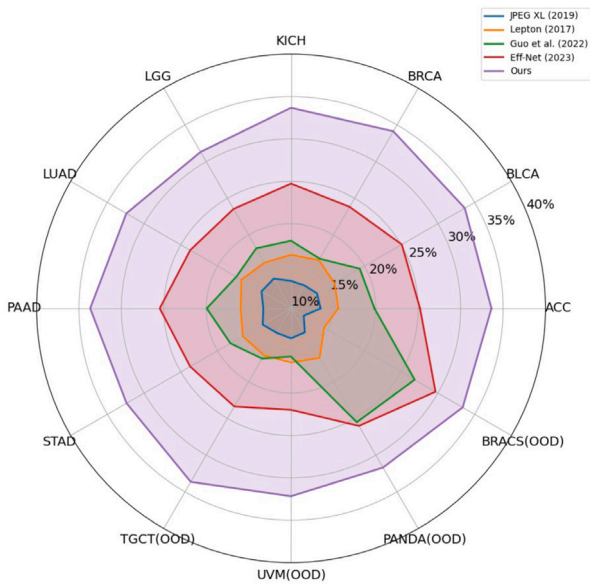


Fig. 4. Comparison of compression saving (%) on in-distribution and out-of-distribution (OOD) datasets. Our proposed method consistently outperforms all competing methods.

foreground image tiles. For each tile, PNG images are paired with quantized DCT coefficients extracted from their JPEG counterparts using the `torchjpeg.codec.quality` module under various quality factors and chroma-subsampling configurations. Notably, we focus primarily on the industry-standard YCbCr 4:2:0 sampling at 75% quality. Data from eight organ types in the TCGA dataset were randomly split into in-distribution training and test sets with an 80:20 ratio. Meanwhile, data from the remaining two TCGA organ types, as well as images from non-TCGA datasets (PANDA and BRACS), were reserved as out-of-distribution (OOD) test sets. Detailed partitioning information is provided in Fig. 3.

4. Experimental results

4.1. Experiment settings

4.1.1. Datasets

We leverage 806 whole-slide images (WSIs) obtained from the publicly accessible TCGA database for in-distribution training and evaluation, alongside 60 WSIs designated for out-of-distribution evaluation.

Table 3

With respect to the parameters and computational cost of Small, Medium, and Large model variants by varying the number of Transformer blocks (N).

Model size	N	#Params(M)	#GFLOPs
Small	2	26.77	31.46
Medium	3	43.34	39.94
Large	4	76.48	56.90

Specifically, the in-distribution dataset comprises eight TCGA sub-datasets (BRCA, KICH, STAD, ACC, PAAD, BLCA, LUAD, and LGG), each corresponding to a distinct cancer type from a particular anatomical site. Conversely, the out-of-distribution evaluation set consists of four sub-datasets (PANDA, BRACS, TGCT and UVM), as documented in Table 1. Following the methodology in Ying et al. (2023), all foreground regions within the WSIs are tiled into non-overlapping 256×256 patches, generating a total of over ten million image tiles. Furthermore, consistent with (Guo et al., 2022, 2023), we extract quantized DCT coefficients across diverse JPEG quality factors and chroma-subsampling schemes using `torchjpeg.codec.quality`. The extracted coefficients are subsequently processed via our preprocessing pipeline before being input to the model.

4.1.2. Implementation details

For training, we set the total number of epochs to 50, employing the Adam optimizer with a learning rate of 1×10^{-4} and a batch size of 48. All experiments were conducted in a consistent environment using eight NVIDIA GeForce RTX 4090 GPUs. To further stabilize training, gradient clipping with a maximum norm of 1.0 is applied. To ensure a fair comparison, we also trained the two baseline methods, Guo et al. (2022) and Eff-Net (Guo et al., 2023), on our dataset from scratch. Compression performance is evaluated using the widely adopted metrics: bits per pixel (BPP) and compression saving. The BPP for a given image is calculated as

$$\text{BPP} = \frac{\text{Total bits for compressed image}}{H \times W}, \quad (1)$$

where H and W denote the spatial dimensions of the original image. The compression saving relative to a JPEG baseline at the same image quality level is then defined as

$$\text{Compression Saving (\%)} = 100 \times \frac{\text{BPP}_{\text{JPEG}} - \text{BPP}_{\text{method}}}{\text{BPP}_{\text{JPEG}}}, \quad (2)$$

where BPP_{JPEG} and $\text{BPP}_{\text{method}}$ denote the bits per pixel of the JPEG baseline and the proposed method, respectively.

Table 4

Generalization performance under out-of-distribution (OOD) settings on the PANDA dataset: BPP and Compression Saving (%) across varying JPEG quality levels.

Quality \ Method	JPEG		JPEG XL		Lepton		Ours	
	BPP		BPP	Saving	BPP	Saving	BPP	Saving
85	2.3320		1.8103	22.37%	1.7785	23.73%	2.0300	12.95%
75	1.7804		1.5439	13.29%	1.4824	16.75%	1.2160	31.71%
65	1.6308		1.4096	13.57%	1.3461	17.46%	1.0960	32.79%
55	1.4993		1.2756	14.92%	1.2104	19.27%	0.9980	33.44%

4.2. Comparison with existing methods

To evaluate the effectiveness of our proposed method, we conducted a comprehensive quantitative comparison against several state-of-the-art (SOTA) and classical compression methods, including JPEG, JPEG XL (Alakuijala et al., 2019, 2020), Lepton (Horn et al., 2017), Guo et al. (2022), and Eff-Net (Guo et al., 2023). The results, summarized in Table 2, demonstrate the clear superiority of our approach.

On the in-distribution datasets, our method consistently achieves the lowest Bits Per Pixel (BPP) and consequently the highest compression savings. For instance, compared to the most recent competitor, Eff-Net (Guo et al., 2023), our method boosts the compression saving from 25% to an average of over 33%, marking a significant improvement in recompression performance. This consistent dominance is visually corroborated by the radar chart in Fig. 4, where our method's performance (purple) comprehensively envelops that of all other techniques, indicating its robust superiority across diverse data types. Empirical findings indicate a considerable performance drop for the methods proposed by Guo et al. (2022) and Eff-Net (Guo et al., 2023) when subjected to large-scale and heterogeneous training and testing data, particularly when juxtaposed with their claimed performance on constrained natural image datasets. Among these, the approach by Guo et al. (2022) suffered the most significant reduction in performance.

Crucially, our model exhibits remarkable generalization ability on diverse out-of-distribution (OOD) datasets. As shown in Table 2, our method maintains its lead across all OOD benchmarks. Specifically, it achieves compression savings of 33.64% and 32.17% on the TCGA-OOD datasets (TGCT and UVM), respectively. More importantly, on the challenging non-TCGA datasets PANDA and BRACS, characterized by significant domain shifts from different hospitals and scanners, our method continues to outperform all baselines, achieving substantial savings of 31.69% and 33.37%, respectively. This sustained high performance on both intra-domain (TCGA) and cross-domain (non-TCGA) unseen data underscores the strong robustness and generalization capabilities of our model, a critical attribute for real-world clinical applications.

To further investigate the stability and fine-grained performance, we present a per-slice BPP comparison against the strongest recent baselines in Fig. 5. The bar chart clearly illustrates that our method (green bars) achieves a lower BPP on every single slice of the image volume. This consistent per-slice advantage, rather than just an on-average improvement, proves the robustness and reliability of our compression model. In summary, the collective evidence from these results validates the superior effectiveness, robustness, and generalization power of our proposed method.

4.3. Robustness to varying JPEG configurations

To evaluate the generalizability of our proposed method beyond the standard training configuration (YCbCr 4:2:0, Quality 75), we conducted extensive experiments on the PANDA dataset, which serves as a challenging out-of-distribution (OOD) benchmark due to its distinct domain characteristics (different hospitals and scanners) compared to the TCGA training data. Specifically, we assessed the compression performance across a range of JPEG quality levels: 85, 75, 65, and 55. The results are summarized in Table 4. As shown in Table 4, our

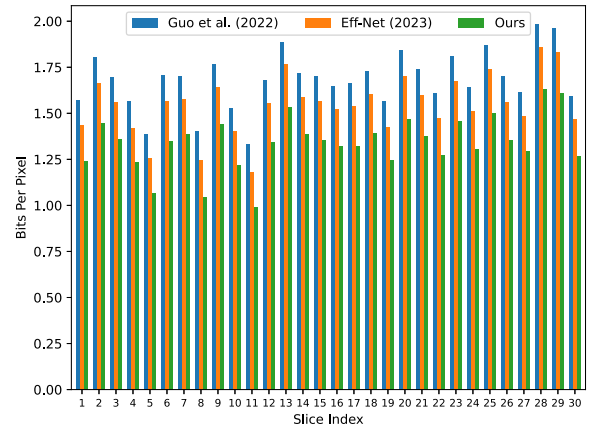


Fig. 5. A detailed comparison of the Bits Per Pixel (BPP) for each of the 30 slices in the out-of-distribution TGCT dataset. The results demonstrate that our method consistently outperforms other methods by achieving a lower bitrate for every slice.

method demonstrates robust generalization capabilities across all tested quality factors, consistently outperforming baseline methods (JPEG XL and Lepton) even when evaluated on unseen compression settings.

Performance at Standard and High Quality: At the standard clinical quality level (Quality 75), our method achieves a significant compression saving of 31.71% relative to JPEG. Even in higher-fidelity settings (Quality 85), where source images contain less redundancy, our model still delivers a 12.95% saving. Although this figure is lower than the savings achieved by JPEG XL (22.37%) and Lepton (23.73%), it demonstrates that our method remains effective. To further enhance compression performance for high-quality JPEGs, future work could involve incorporating high-quality samples into the training process.

Efficiency in Archival Scenarios: Notably, our method exhibits exceptional efficiency at lower quality factors (Quality 65 and 55), which are commonly used for long-term archival storage to minimize disk usage. In these scenarios, our approach achieves compression savings of 32.79% and 33.44%, respectively. This indicates that our probability modeling of DCT coefficients effectively captures statistical dependencies regardless of the quantization step size, making it particularly suitable for cost-effective medical data archiving.

4.4. Analysis of scaling laws

To systematically evaluate the scalability of our proposed architecture, we conduct ablation studies on both model capacity and training data volume. These experiments are crucial for understanding the behavior of our model and its potential for future improvements.

Model Scaling. We first investigate the impact of model capacity on compression performance. We define Small, Medium, and Large by varying the number of Transformer blocks (N) from 2 to 4, as detailed in Table 3. The corresponding parameter counts and computational costs (GFLOPs) scale accordingly. The performance of these variants is presented in Fig. 6(a). As the model capacity increases

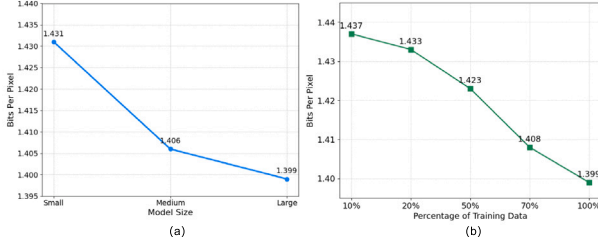


Fig. 6. Ablation studies on model scaling and data quantity. (a) Bits Per Pixel (BPP) for Small, Medium, and Large model variants, demonstrating the effectiveness of scaling model capacity. (b) The effect of training data volume on the Large model’s performance, showing a clear trend of improved compression with more data.

Table 5

Comparison of network efficiency on the PANDA dataset with JPEG 4:2:0 at QP 75. Evaluated on NVIDIA GeForce GTX 1660 Ti.

Methods	GFLOPs	Encode(s)	Decode(s)	GPU memory(M)
JPEG XL	N/A	0.35	0.23	N/A
Lepton	N/A	0.34	0.25	N/A
Guo	102.85	2.69	2.5	965
Eff-Net	44.66	1.52	1.44	853
Ours	56.90	4.99	4.94	1065

from the Small to the Large configuration, a clear trend of improved compression performance emerges. Specifically, the BPP decreases from 1.431 for the Small model to 1.406 for the Medium model, and culminates at 1.399 for the Large model. This result demonstrates a positive correlation between model size and performance, confirming that our architecture effectively utilizes increased capacity to learn more efficient representations.

Data Scaling. In addition to model size, we analyze the effect of training data volume. For this study, we train our best-performing Large model on varying subsets of the training data, ranging from 10% to 100%. As illustrated in Fig. 6(b), a clear scaling law is observed: increasing the amount of training data leads to a monotonic decrease in BPP. The performance improves from a BPP of 1.437 when trained with only 10% of the data to 1.399 when the full dataset is utilized. This highlights that our model effectively leverages larger datasets to enhance its compression efficiency, and its performance is not yet saturated by the current data scale.

Collectively, these experiments confirm that our proposed model exhibits favorable scaling properties with respect to both model parameterization and data availability, which is a desirable characteristic for powerful neural compression models.

4.5. Computational efficiency and clinical deployability

To assess the practical applicability of our method in clinical settings, we conducted a comprehensive efficiency analysis on the PANDA dataset. We evaluated encoding/decoding runtime, computational complexity (GFLOPs), and GPU memory usage against baseline methods, including JPEG XL, Lepton, Eff-Net, and Guo et al. All experiments were performed under identical hardware conditions using an NVIDIA GeForce GTX 1660 Ti GPU, a mid-range consumer graphics card commonly found in general-purpose workstations, rather than high-end server clusters. The results are summarized in Table 5.

our method requires approximately 5 s for both encoding and decoding per tile, with a GPU memory footprint of ~1 GB (1065 MB). While this latency is higher than that of traditional codecs (e.g., JPEG XL, ~0.3s) and lightweight networks like Eff-Net (~1.5s), it remains within a manageable range for offline processing workflows. Notably, our computational complexity (56.90 GFLOPs) is significantly lower

than the deep learning baseline Guo et al. (102.85 GFLOPs), indicating a more efficient architectural design despite the superior compression performance.

The primary clinical value of our strictly lossless method lies in long-term data archival. In such scenarios, compression is typically performed as an offline, batch process for “cold data” (infrequently accessed historical records). For these applications, the modest increase in inference time (~5s/tile) is a negligible trade-off compared to the substantial benefits of reduced storage costs and bandwidth requirements. It is important to note that these benchmarks represent a conservative estimate using older consumer hardware. With the rapid adoption of modern GPUs (e.g., RTX 30/40 series or professional A-series cards) in medical imaging infrastructure, the inference speed of our transformer-based model is expected to improve drastically. Thus, our method offers a scalable and cost-effective solution for sustainable digital pathology archives.

4.6. Visualization

To gain a deeper understanding of our model’s internal workings and the source of its strong performance, we visualize the learned self-attention maps from a representative Transformer block within our context model. Fig. 7 displays the attention patterns for all 8 heads, separately for the Y and CbCr components. The visualization reveals a remarkable degree of specialization among the heads, where each head learns a distinct and meaningful pattern for information aggregation.

A striking example is *Head 2* for the CbCr component, which learns an almost perfect identity function (a sharp diagonal line). This indicates that the model has learned to selectively preserve information from certain tokens without modification, effectively acting as a residual connection. This is a powerful learned behavior, preventing feature degradation. And, *Head 1* for both Y and CbCr components exhibits a strong focus on the main diagonal and its immediate neighbors. This pattern closely mimics the behavior of a convolutional kernel, focusing on capturing local dependencies and textures within a small receptive field. Other heads, such as *Head 3*, *4*, and *7*, display more complex and sparser patterns. They capture non-local, long-range dependencies across the image, linking spatially distant but contextually relevant regions. This capability is a key advantage of the Transformer architecture over traditional CNNs, which struggle to model such relationships efficiently.

This observed specialization provides a clear rationale for the model’s excellent scaling properties, as demonstrated in our ablation studies. The multi-head attention mechanism is not a rigid structure but a flexible ensemble of experts. In essence, the ability of the attention mechanism to dynamically learn and combine a diverse set of fundamental operations makes it an incredibly powerful and scalable building block for a neural compression model.

5. Discussion and conclusion

In this work, we addressed the fundamental limitations of existing JPEG lossless recompression techniques, which often struggle with long-range dependency modeling and cross-domain generalization. We introduced a Universe Pathology JPEG Lossless Recompression Foundation Model (ULRFM), a novel Transformer-based architecture specifically designed to overcome these challenges by effectively modeling global contexts within JPEG DCT coefficient streams. Our extensive experiments, conducted on a massive-scale digital pathology dataset, provide compelling evidence for the superiority of our approach.

Our quantitative results demonstrate that ULRFM establishes a new state of the art, substantially outperforming both traditional methods like JPEG XL and recent CNN-based learned approaches such as Eff-Net. The significant increase in compression savings is a direct testament to the Transformer’s enhanced representational capacity.

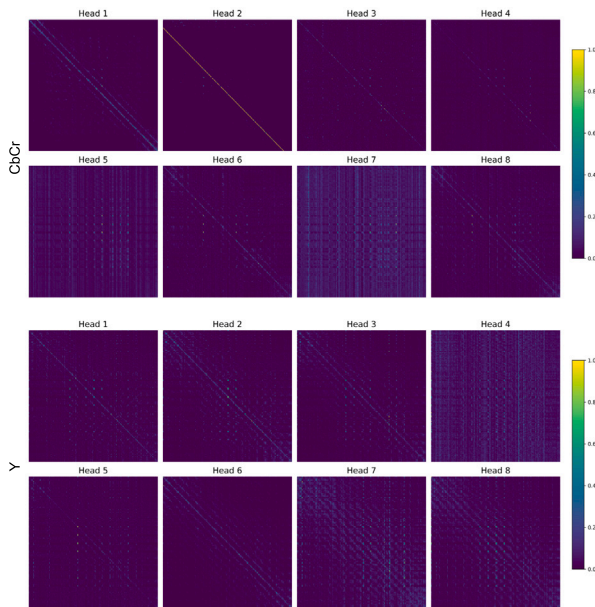


Fig. 7. Visualization of the learned self-attention maps from a transformer block in our context model. The top and bottom rows display the patterns for the 8 attention heads corresponding to the CbCr and Y channels, respectively. The diversity in patterns highlights the specialization of each head. For example, *Head 2* (CbCr) approximates an identity function, while other heads focus on local or long-range spatial dependencies.

Crucially, this superiority is not confined to in-distribution data. ULRFM's strong performance out-of-distribution datasets underscores its robust generalization capabilities, a critical weakness in prior learned models that our approach successfully mitigates. Specifically, beyond the TCGA-based OOD sets (TGCT, UVM), our method demonstrates remarkable robustness on completely independent non-TCGA datasets, PANDA and BRACS. Despite significant domain shifts arising from different hospitals, scanners, and staining protocols, ULRFM achieves compression savings of 31.69% and 33.37%, respectively, consistently outperforming all baselines. This confirms that our model captures universal statistical patterns in pathology images rather than overfitting to specific dataset characteristics.

This study provides further insight into the potential of our model. We observed a clear and consistent improvement in compression performance with increases in both model capacity and data quantity. This confirms that ULRFM is not a shallow model with quickly diminishing returns but a scalable foundation model architecture whose performance is not yet saturated. This scalability is a highly desirable property, suggesting that future performance gains are attainable with access to even larger datasets and greater computational resources. Furthermore, to validate the practical applicability of ULRFM across diverse clinical pipelines, we evaluated its generalization under varying JPEG configurations. Experiments on the PANDA dataset across quality factors ranging from 55 to 85 reveal that our method maintains superior efficiency regardless of the quantization level. Notably, at lower quality settings, commonly used for archival storage, our approach achieves savings exceeding 32%, demonstrating its particular suitability for cost-effective long-term data retention.

In conclusion, ULRFM represents a paradigm shift in JPEG lossless recompression. By leveraging the global context modeling power of Transformers and training on a large-scale, diverse dataset, it not only sets a new benchmark in compression efficiency and generalization but also provides a clear path for future scaling. The practical implications for digital pathology are significant, as our method can markedly alleviate the escalating storage and transmission burdens associated with whole-slide imaging.

Despite its strong performance, we acknowledge that the computational cost increases with model size. Future work could explore model compression techniques, such as knowledge distillation and quantization, to create more lightweight yet powerful variants.

CRediT authorship contribution statement

Tao Song: Writing – review & editing, Writing – original draft, Visualization, Validation, Methodology, Investigation, Conceptualization. **Rong Tao:** Writing – original draft, Methodology, Investigation, Conceptualization. **Chunyan Wu:** Visualization, Validation, Data curation. **Mengmeng Zhao:** Visualization, Validation, Investigation, Data curation. **Jiajun Deng:** Writing – review & editing, Visualization, Validation, Formal analysis. **Yi Guo:** Writing – review & editing, Methodology, Conceptualization. **Feng Xu:** Writing – review & editing, Methodology, Conceptualization. **Chang Chen:** Writing – review & editing, Supervision, Conceptualization. **Kun Qian:** Writing – review & editing, Supervision, Conceptualization.

Declaration of competing interest

The authors declare that they have no known competing financial interests or personal relationships that could have appeared to influence the work reported in this paper.

References

- Aben, N., de Jong, E.D., Gatopoulos, I., Känzig, N., Karasikov, M., Lagré, A., Moser, R., van Doorn, J., Tang, F., et al., 2024. Towards large-scale training of pathology foundation models. *arXiv preprint arXiv:2404.15217*.
- Alakuijala, J., Boukourt, S., Ebrahimi, T., Kliuchnikov, E., Sneyers, J., Upenik, E., Vandevenne, L., Versari, L., Wassenberg, J., 2020. Benchmarking JPEG XL image compression. In: *Optics, Photonics and Digital Technologies for Imaging Applications VI*, vol. 11353, SPIE, pp. 187–206.
- Alakuijala, J., Van Asseldonk, R., Boukourt, S., Bruse, M., Comşa, I.-M., Firsching, M., Fischbacher, T., Kliuchnikov, E., Gomez, S., Obryk, R., et al., 2019. JPEG XL next-generation image compression architecture and coding tools. In: *Applications of Digital Image Processing XLII*, vol. 11137, SPIE, pp. 112–124.
- Ballé, J., Minnen, D., Singh, S., Hwang, S.J., Johnston, N., 2018. Variational image compression with a scale hyperprior. *arXiv preprint arXiv:1802.01436*.
- Brancati, N., Anniciello, A.M., Pati, P., Riccio, D., Scognamiglio, G., Jaume, G., De Pietro, G., Di Bonito, M., Fonciuberta, A., Botti, G., et al., 2022. Bracs: A dataset for breast carcinoma subtyping in h&e histology images. *Database* 2022, baac093.
- Bulten, W., Kartasalo, K., Chen, P.-H.C., Ström, P., Pinckaers, H., Nagpal, K., Cai, Y., Steiner, D.F., Van Boven, H., Vink, R., et al., 2022. Artificial intelligence for diagnosis and gleason grading of prostate cancer: the PANDA challenge. *Nature Med.* 28 (1), 154–163.
- Chen, R.J., Ding, T., Lu, M.Y., Williamson, D.F., Jaume, G., Song, A.H., Chen, B., Zhang, A., Shao, D., Shaban, M., et al., 2024. Towards a general-purpose foundation model for computational pathology. *Nature Med.* 30 (3), 850–862.
- Chen, K., Liu, M., Yan, F., Ma, L., Shi, X., Wang, L., Wang, X., Zhu, L., Wang, Z., Zhou, M., et al., 2025. Cost-effective instruction learning for pathology vision and language analysis. *Nature Comput. Sci.* 5 (7), 524–533.
- Ding, T., Wagner, S.J., Song, A.H., Chen, R.J., Lu, M.Y., Zhang, A., Vaidya, A.J., Jaume, G., Shaban, M., Kim, A., et al., 2025. A multimodal whole-slide foundation model for pathology. *Nature Med.* 1–13.
- Dippel, J., Feulner, B., Winterhoff, T., Milbich, T., Tietz, S., Schallenberg, S., Dornbach, G., Kunt, A., Heinke, S., Eich, M.-L., et al., 2024. Rudolfv: a foundation model by pathologists for pathologists. *arXiv preprint arXiv:2401.04079*.
- Duda, J., 2013. Asymmetric numeral systems: entropy coding combining speed of huffman coding with compression rate of arithmetic coding. *arXiv preprint arXiv:1311.2540*.
- Duda, J., Tahboub, K., Gadgil, N.J., Delp, E.J., 2015. The use of asymmetric numeral systems as an accurate replacement for huffman coding. In: *2015 Picture Coding Symposium. PCS, IEEE*, pp. 65–69.
- Fan, X., Li, X., Chen, Z., 2022. Learned lossless jpeg transcoding via joint lossy and residual compression. In: *2022 IEEE International Conference on Visual Communications and Image Processing. VCIP, IEEE*, pp. 1–5.
- Goode, A., Gilbert, B., Harkes, J., Jukic, D., Satyanarayanan, M., 2013. OpenSlide: A vendor-neutral software foundation for digital pathology. *J. Pathol. Informatics* 4 (1), 27.
- Gu, A., Dao, T., 2024. Mamba: Linear-time sequence modeling with selective state spaces. In: *First Conference on Language Modeling*.

- Guo, Z., Ma, J., Xu, Y., Wang, Y., Wang, L., Chen, H., 2024. Histgen: Histopathology report generation via local-global feature encoding and cross-modal context interaction. In: *International Conference on Medical Image Computing and Computer-Assisted Intervention*. Springer, pp. 189–199.
- Guo, L., Shi, X., He, D., Wang, Y., Ma, R., Qin, H., Wang, Y., 2022. Practical learned lossless JPEG recompression with multi-level cross-channel entropy model in the DCT domain. In: *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*. pp. 5862–5871.
- Guo, L., Wang, Y., Xu, T., Luo, J., He, D., Ji, Z., Wang, S., Wang, Y., Qin, H., 2023. Efficient learned lossless jpeg recompression. *arXiv preprint arXiv:2308.13287*.
- He, K., Chen, X., Xie, S., Li, Y., Dollár, P., Girshick, R., 2022. Masked autoencoders are scalable vision learners. In: *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*. pp. 16000–16009.
- Horn, D.R., ElKabany, K., Lesniewski-Lass, C., Winstein, K., 2017. The design, implementation, and deployment of a system to transparently compress hundreds of petabytes of image files for a *{File-Storage}* service. In: *14th USENIX Symposium on Networked Systems Design and Implementation*. NSDI 17, pp. 1–15.
- Hua, S., Wu, J., Shen, T., Hu, K., Huang, Z., Ni, S., Zhang, Z., Li, Y., Wang, Z., Zhang, X., 2025. Pathfound: an agentic multimodal model activating evidence-seeking pathological diagnosis. *arXiv preprint arXiv:2512.23545*.
- Hua, S., Yan, F., Shen, T., Ma, L., Zhang, X., 2024. PathoDuet: Foundation models for pathological slide analysis of H&E and IHC stains. *Med. Image Anal.* 97, 103289.
- Huffman, D.A., 2006. A method for the construction of minimum-redundancy codes. *Resonance* 11 (2), 91–99.
- Lenz, T., Neidlinger, P., Ligerio, M., Wölflein, G., van Treeck, M., Kather, J.N., 2025. Unsupervised foundation model-agnostic slide-level representation learning. In: *Proceedings of the Computer Vision and Pattern Recognition Conference*. pp. 30807–30817.
- Liu, J., Yang, H., Zhou, H.-Y., Yu, L., Liang, Y., Yu, Y., Zhang, S., Zheng, H., Wang, S., 2024. Swin-UMamba[†]: adapting mamba-based vision foundation models for medical image segmentation. *IEEE Trans. Medical Imag.* 44 (10), 3898–3908.
- Lu, M.Y., Chen, B., Williamson, D.F., Chen, R.J., Zhao, M., Chow, A.K., Ikemura, K., Kim, A., Pouli, D., Patel, A., et al., 2024. A multimodal generative AI copilot for human pathology. *Nature* 634 (8033), 466–473.
- Lu, J., Yan, F., Zhang, X., Gao, Y., Zhang, S., 2024. Pathotune: Adapting visual foundation model to pathological specialists. In: *International Conference on Medical Image Computing and Computer-Assisted Intervention*. Springer, pp. 395–406.
- Ma, J., Guo, Z., Zhou, F., Wang, Y., Xu, Y., Li, J., Yan, F., Cai, Y., Zhu, Z., Jin, C., et al., 2026. A generalizable pathology foundation model using a unified knowledge distillation pretraining framework. *Nature Biomed. Eng.* 10 (3), 545–564.
- Minnen, D., Ballé, J., Toderici, G.D., 2018. Joint autoregressive and hierarchical priors for learned image compression. *Adv. Neural Inf. Process. Syst.* 31.
- Nechaev, D., Pchelnikov, A., Ivanova, E., 2024. Hibou: A family of foundational vision transformers for pathology. *arXiv preprint arXiv:2406.05074*.
- Oquab, M., Darcet, T., Moutakanni, T., Vo, H., Szafraniec, M., Khalidov, V., Fernandez, P., Haziza, D., Massa, F., El-Nouby, A., et al., 2023. Dinov2: Learning robust visual features without supervision. *arXiv preprint arXiv:2304.07193*.
- Rahman, M.M., Tutul, A.A., Nath, A., Laishram, L., Jung, S.K., Hammond, T., 2024. Mamba in vision: A comprehensive survey of techniques and applications. *arXiv preprint arXiv:2410.03105*.
- Shaikovski, G., Casson, A., Severson, K., Zimmermann, E., Wang, Y.K., Kunz, J.D., Retamero, J.A., Oakley, G., Klimstra, D., Kanan, C., et al., 2024. Prism: A multimodal generative foundation model for slide-level histopathology. *arXiv preprint arXiv:2405.10254*.
- Shen, Y., Luo, Y., Shen, D., Ke, J., 2022. Randstainna: Learning stain-agnostic features from histology slides by bridging stain augmentation and normalization. In: *International Conference on Medical Image Computing and Computer-Assisted Intervention*. Springer, pp. 212–221.
- Theis, L., Shi, W., Cunningham, A., Huszar, F., 2017. Lossy image compression with compressive autoencoders. *arXiv preprint arXiv:1703.00395*.
- Vaidya, A., Zhang, A., Jaume, G., Song, A.H., Ding, T., Wagner, S.J., Lu, M.Y., Doucet, P., Robertson, H., Almagro-Perez, C., et al., 2025. Molecular-driven foundation model for oncologic pathology. *arXiv preprint arXiv:2501.16652*.
- Vorontsov, E., Bozkurt, A., Casson, A., Shaikovski, G., Zelechowski, M., Severson, K., Zimmermann, E., Hall, J., Tenenholtz, N., Fusi, N., et al., 2024. A foundation model for clinical-grade computational pathology and rare cancers detection. *Nature Med.* 30 (10), 2924–2935.
- Wallace, G.K., 2002. The JPEG still picture compression standard. *IEEE Trans. Consum. Electron.* 38 (1), xviii–xxxiv.
- Wang, H., Guo, S., Ye, J., Deng, Z., Cheng, J., Li, T., Chen, J., Su, Y., Huang, Z., Shen, Y., et al., 2025. SAM-Med3D: a vision foundation model for general-purpose segmentation on volumetric medical images. *IEEE*.
- Wang, Y.K., Tydlitova, L., Kunz, J.D., Oakley, G., Chow, B.K.B., Godrich, R.A., Lee, M.C., Aghdam, H., Bozkurt, A., Zelechowski, M., et al., 2024. Screen them all: high-throughput pan-cancer genetic and phenotypic biomarker screening from h&e whole slide images. *arXiv preprint arXiv:2408.09554*.
- Wang, X., Wang, D., Li, X., Rittscher, J., Metaxas, D., Zhang, S., 2025. Editorial for special issue on foundation models for medical image analysis. *Medical Image Anal.* 100, 103389.
- Wang, X., Zhang, X., Wang, G., He, J., Li, Z., Zhu, W., Guo, Y., Dou, Q., Li, X., Wang, D., et al., 2024. Openmedlab: An open-source platform for multi-modality foundation models in medicine. *arXiv preprint arXiv:2402.18028*.
- Witten, I.H., Neal, R.M., Cleary, J.G., 1987. Arithmetic coding for data compression. *Commun. ACM* 30 (6), 520–540.
- Wu, Y., Li, S., Du, Z., Zhu, W., 2023. BROW: Better features for whole slide image based on self-distillation. *arXiv preprint arXiv:2309.08259*.
- Xu, H., Usuyama, N., Bagga, J., Zhang, S., Rao, R., Naumann, T., Wong, C., Gero, Z., González, J., Gu, Y., et al., 2024. A whole-slide foundation model for digital pathology from real-world data. *Nature* 630 (8015), 181–188.
- Xu, Y., Wang, Y., Zhou, F., Ma, J., Jin, C., Yang, S., Li, J., Zhang, Z., Zhao, C., Zhou, H., et al., 2024. A multimodal knowledge-enhanced whole-slide pathology foundation model. *arXiv preprint arXiv:2407.15362*.
- Yan, F., Wu, J., Li, J., Wang, W., Chen, Y., Wei, L., Lu, J., Chen, W., Gao, Z., Li, J., et al., 2025. Pathorchestra: A comprehensive foundation model for computational pathology with over 100 diverse clinical-grade tasks. *npj Digital Medicine* 8 (1), 695.
- Ying, N., Lei, Y., Zhang, T., Lyu, S., Li, C., Chen, S., Liu, Z., Zhao, Y., Zhang, G., 2023. Cpia dataset: A comprehensive pathological image analysis dataset for self-supervised learning pre-training. *arXiv preprint arXiv:2310.17902*.
- Yu, J., Wang, Z., Vasudevan, V., Yeung, L., Seyedhosseini, M., Wu, Y., 2022. Coca: Contrastive captioners are image-text foundation models. *arXiv preprint arXiv:2205.01917*.
- Zhang, Y., Gao, J., Tan, Z., Zhou, L., Ding, K., Zhou, M., Zhang, S., Wang, D., 2026. Data-centric foundation models in computational healthcare: A survey. *ACM Comput. Surveys* 58 (11), 1–35.
- Zhang, S., Metaxas, D., 2024. On the challenges and perspectives of foundation models for medical image analysis. *Medical Image Anal.* 91, 102996.
- Zhong, L., Huang, Z., Liu, Y., Liao, W., Zhang, S., Wang, G., Zhang, S., 2025. VLM-CPL: Consensus pseudo-labels from vision-language models for annotation-free pathological image classification. *IEEE Trans. Medical Imag.*
- Zhou, M., Gao, Y., Ding, K., Zhang, S., Metaxas, D.N., 2026. Ai methodologies for multimodal pathology applications. In: *Less-supervised Segmentation with CNNs*, pp. 311–320, Elsevier.
- Zhou, J., Wei, C., Wang, H., Shen, W., Xie, C., Yuille, A., Kong, T., 2021. Ibot: Image bert pre-training with online tokenizer. *arXiv preprint arXiv:2111.07832*.
- Zimmermann, E., Vorontsov, E., Viret, J., Casson, A., Zelechowski, M., Shaikovski, G., Tenenholtz, N., Hall, J., Klimstra, D., Yousfi, R., et al., 2024. Virchow2: Scaling self-supervised mixed magnification models in pathology. *arXiv preprint arXiv:2408.00738*.