

APPENDIX A

ATTACK HYPERPARAMETER REFERENCE

For ease of reproduction, Table I summarizes the hyperparameters used for each evaluated attack. Trigger spatial geometry, blending weights, and perturbation budgets are kept consistent with the original works for the components that are preserved (see Experimental Evaluation Section); orthogonal delivery components such as DRAM bit-flip injection (TrojViT) and attention-guided patch placement (BadViT) are out of scope for this study, and a fixed-position implementation is used in their place.

TABLE I
ATTACK HYPERPARAMETERS USED IN THE EVALUATION.

Attack	Hyperparameter	Value
BadNets	Trigger size	4×4 px
	Trigger color	solid white
	Position	bottom-right corner
WaNet	Warping strength s	1.0
	Grid scale k	4
	Training mode	noise mode
Blend	Pattern	global random noise
	Blending ratio α	0.2
	Coverage	full image
TrojViT-style	Trigger pattern	checker
	Blending ratio α	0.9
	Patch radius	1 ViT patch
	Delivery	data poisoning (bit-flip omitted)
BadViT-style	Pattern	cross
	Perturbation bound ϵ	8/255 (L^∞)
	Position	fixed patch grid
	Delivery	data poisoning (attention guidance omitted)
Poisoning protocol	CIFAR-10	class 3 $\rightarrow$ 0, rate 0.5 (eff. 5%)
	GTSRB	{1,2,13} $\rightarrow$ 0, rate 0.5 (eff. 8.3%)
	Tiny-ImageNet	all-to-one (1–199 $\rightarrow$ 0), rate 0.1

APPENDIX B

PCA PLOTS FOR DIFFERENT ATTACKS

Individual per-attack PCA plots for all five attacks (BadNets, WaNet, Blend, TrojViT, BadViT) are provided below, showing consistent patterns across all trigger types.

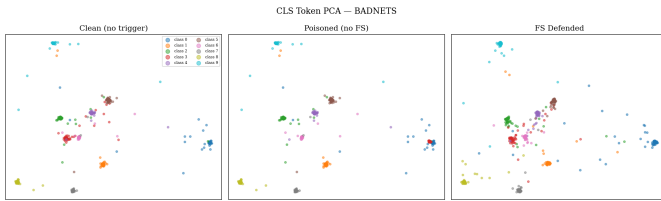


Fig. 1. PCA plots for BadNets Attack.

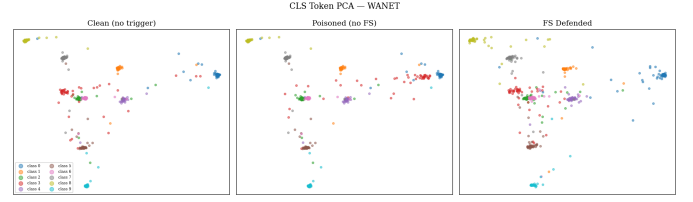


Fig. 2. PCA plots for WaNet Attack.

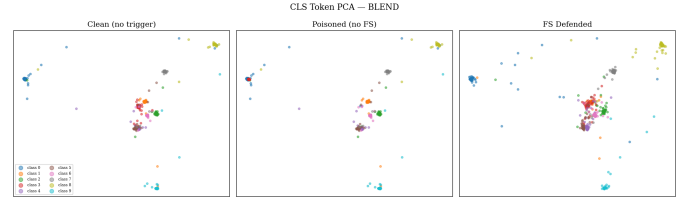


Fig. 3. PCA plots for Blend Attack.

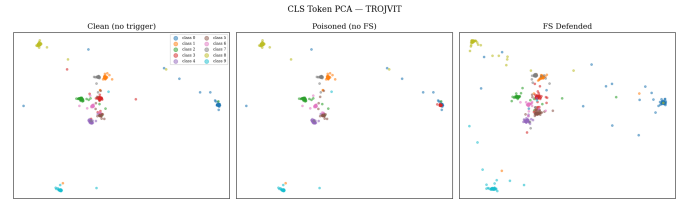


Fig. 4. PCA plots for TrojViT-style Attack.

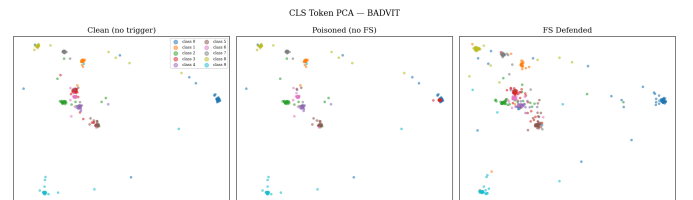


Fig. 5. PCA plots for BadViT-style Attack.