

Research Computing Documentation

[Overview](#) ▼[Tutorials](#) ▼[Quick Reference](#) ▼[Misc Instructions](#) ▲[Using Ansys Fluent on the Cluster \(using_ansys_fluent.html\)](#)[Using Open OnDemand \(VSCode\) \(using_open_ondemand.html\)](#)[Using MatLab \(using_matlab.html\)](#)[External Research Collaborators \(external_research_collaborators.html\)](#)[Convert from DOS to Unix Line Endings with Vim \(convert_dos_line_endings_to_unix.html\)](#)[Opening Multiple Terminals in the Same Window \(Tmux\) \(tmux.html\)](#)[Resources & Links](#) ▼

| Using Tmux

Table of Contents

- [Starting tmux](#)
- [Creating Panes](#)
- [Creating Windows](#)
- [Navigating Panes & Windows](#)
- [Closing Panes & Windows](#)

At this point, you will probably have a ton of terminal windows open and you will have trouble finding the one you want. To solve this problem, you can use a **terminal multiplexer**, a program that allows you to have multiple terminals open in the same terminal window.


There are many terminal multiplexers to choose from, but we recommend `tmux`.

Starting tmux

To start a new `tmux` session, you can simply run `tmux` or `tmux new`.

You can specify a name for the session using the `-s` flag. If you don't specify a name, it will default to "0". If you already have another `tmux` session running, the session name will be "1".

```
$ tmux new -s MyNewSession
```

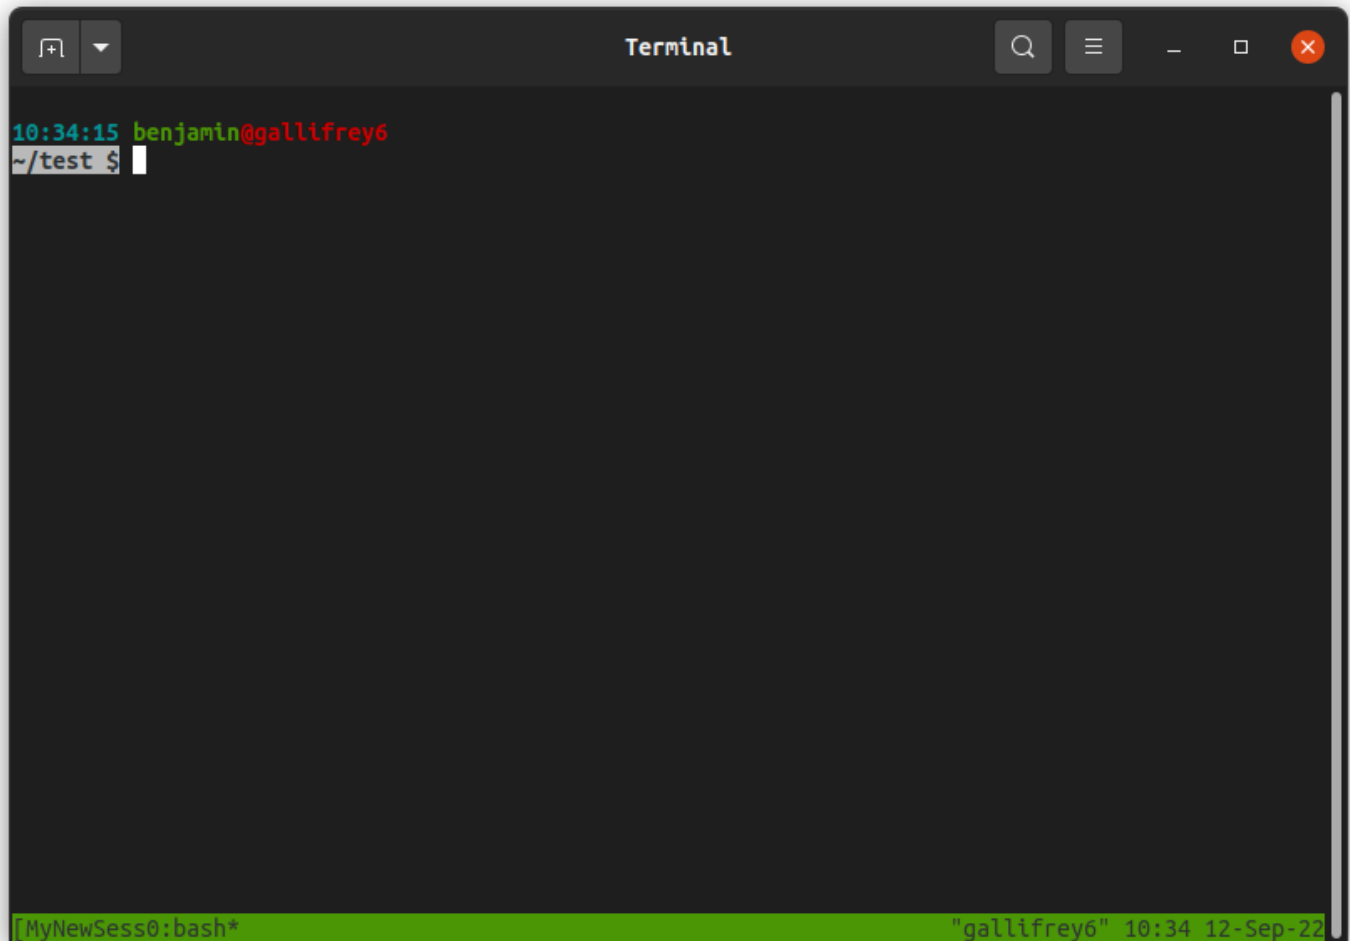



Now you'll notice a green (your color may vary) bar on the bottom of the terminal. You can use this terminal just like you would a normal terminal, but you probably want to open another terminal...

Creating Panes


You can have multiple **panes** inside the same window. Each pane will be its own separate terminal.

To split your window into two side-by-side panes, you can press `CTRL+B`, then `:`, and then type `split-window -h`. You could also press `CTRL+B`, then `%` to do the same.

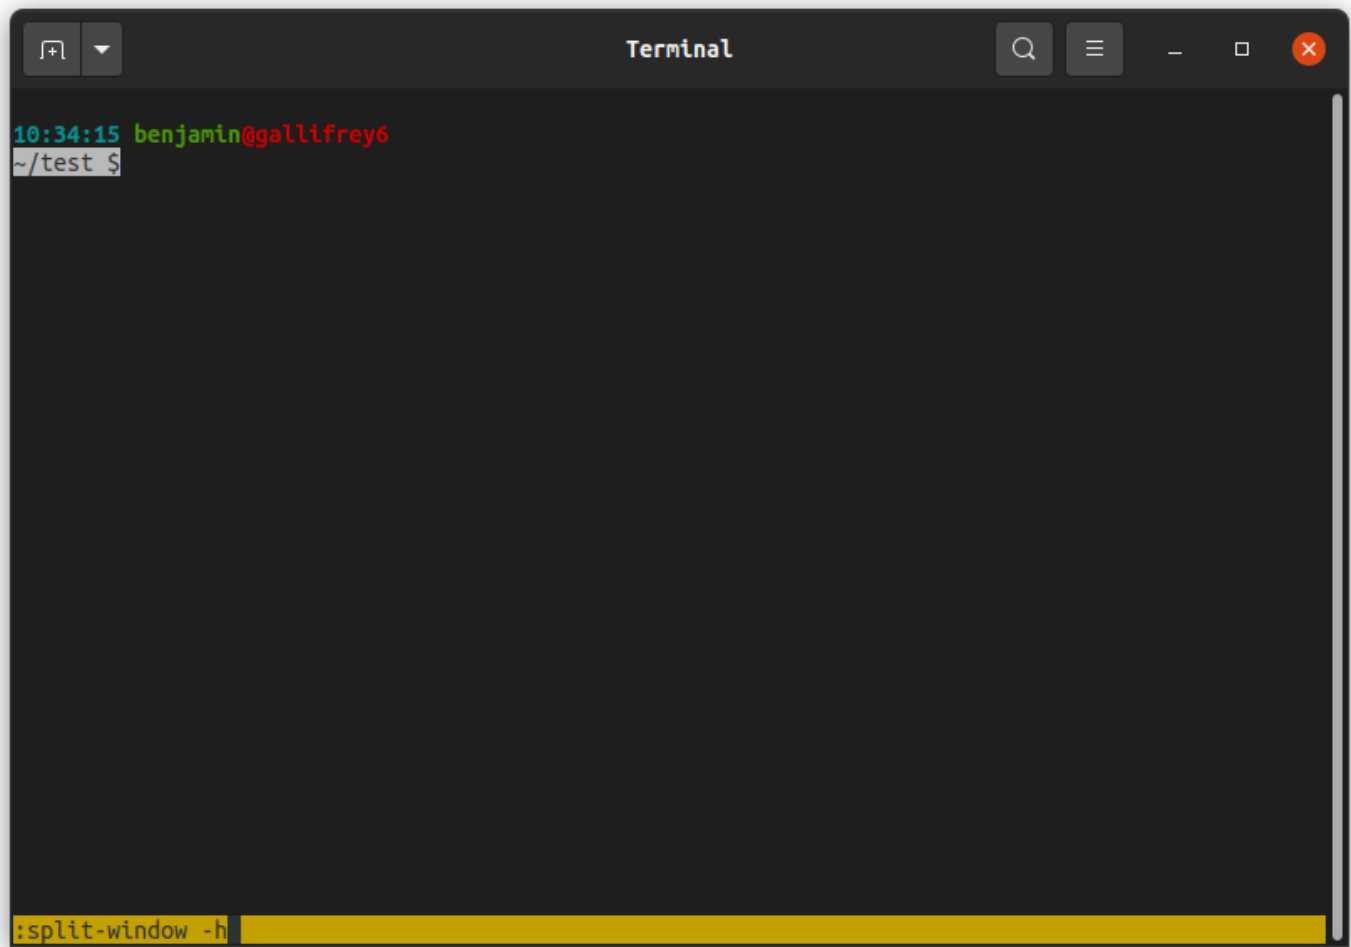


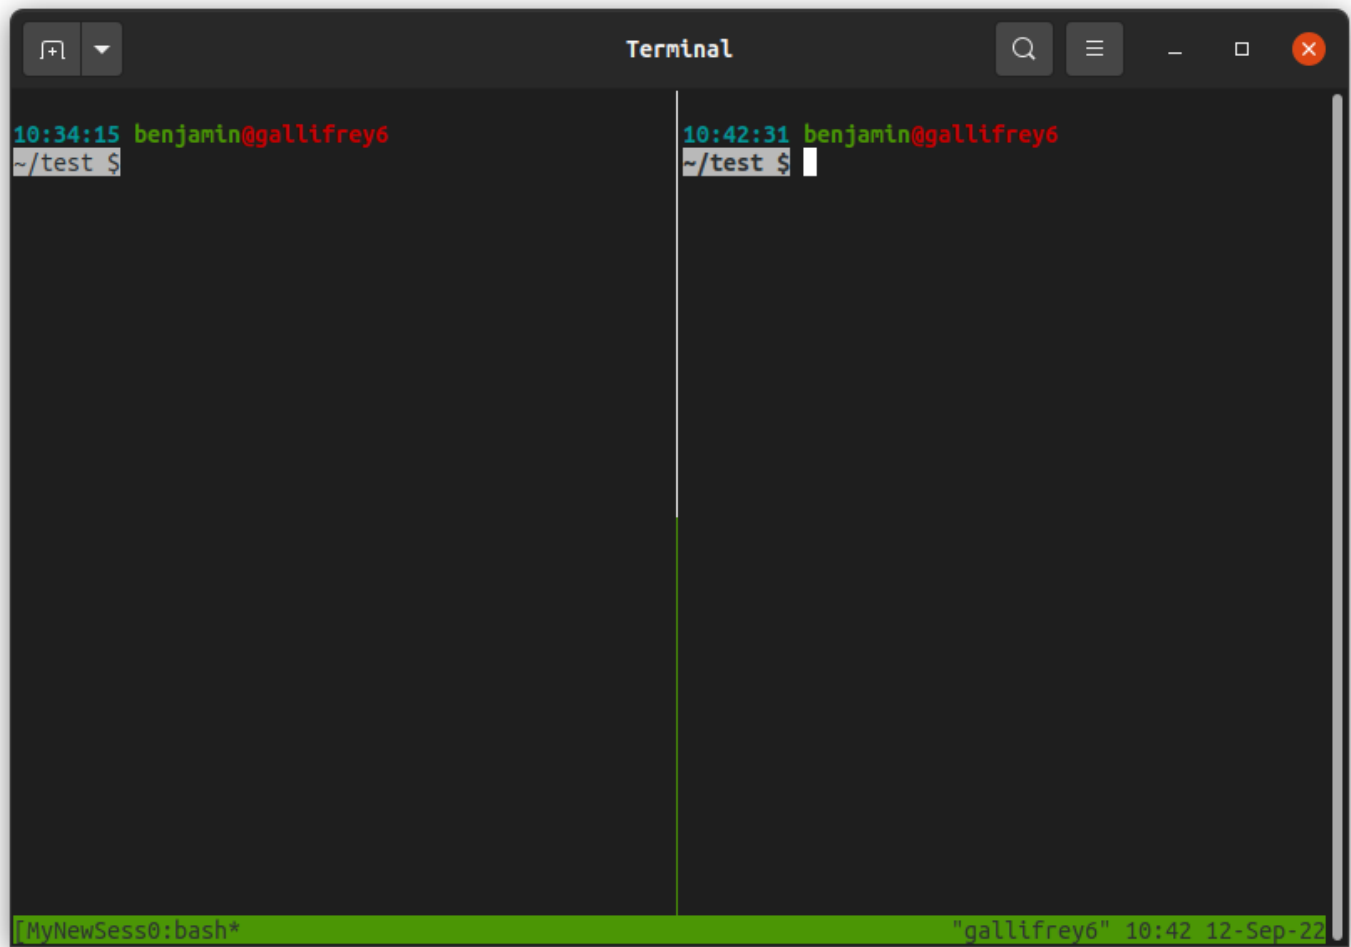


To split your window into two panes, one on top of the other, the process is similar. Either `CTRL+B :` then `split-window -v` or `CTRL+B "`.

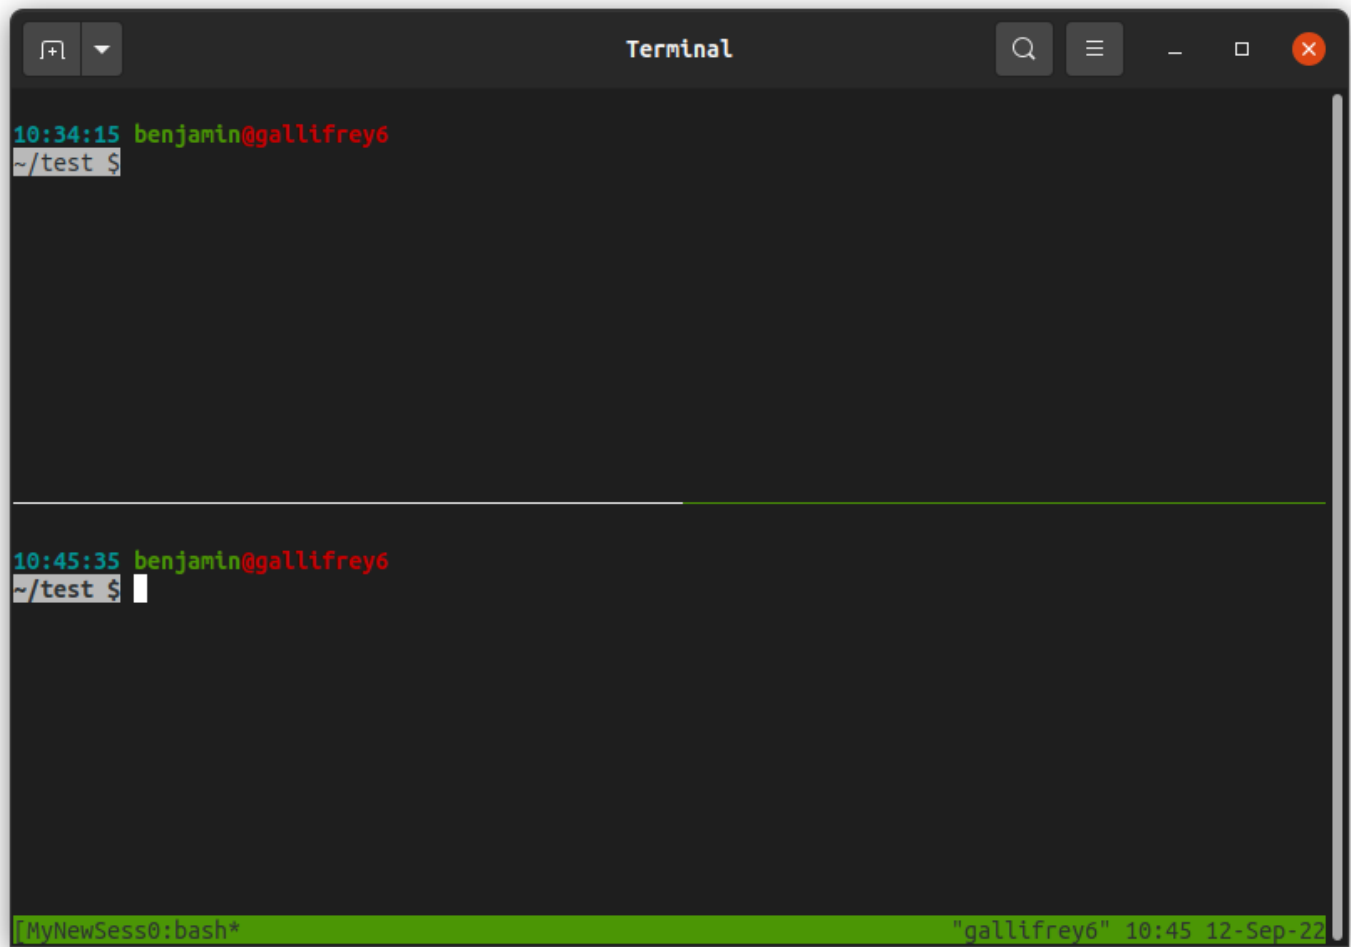


You can do this as many times as you want in different combinations to get the perfect setup for you. Some examples:

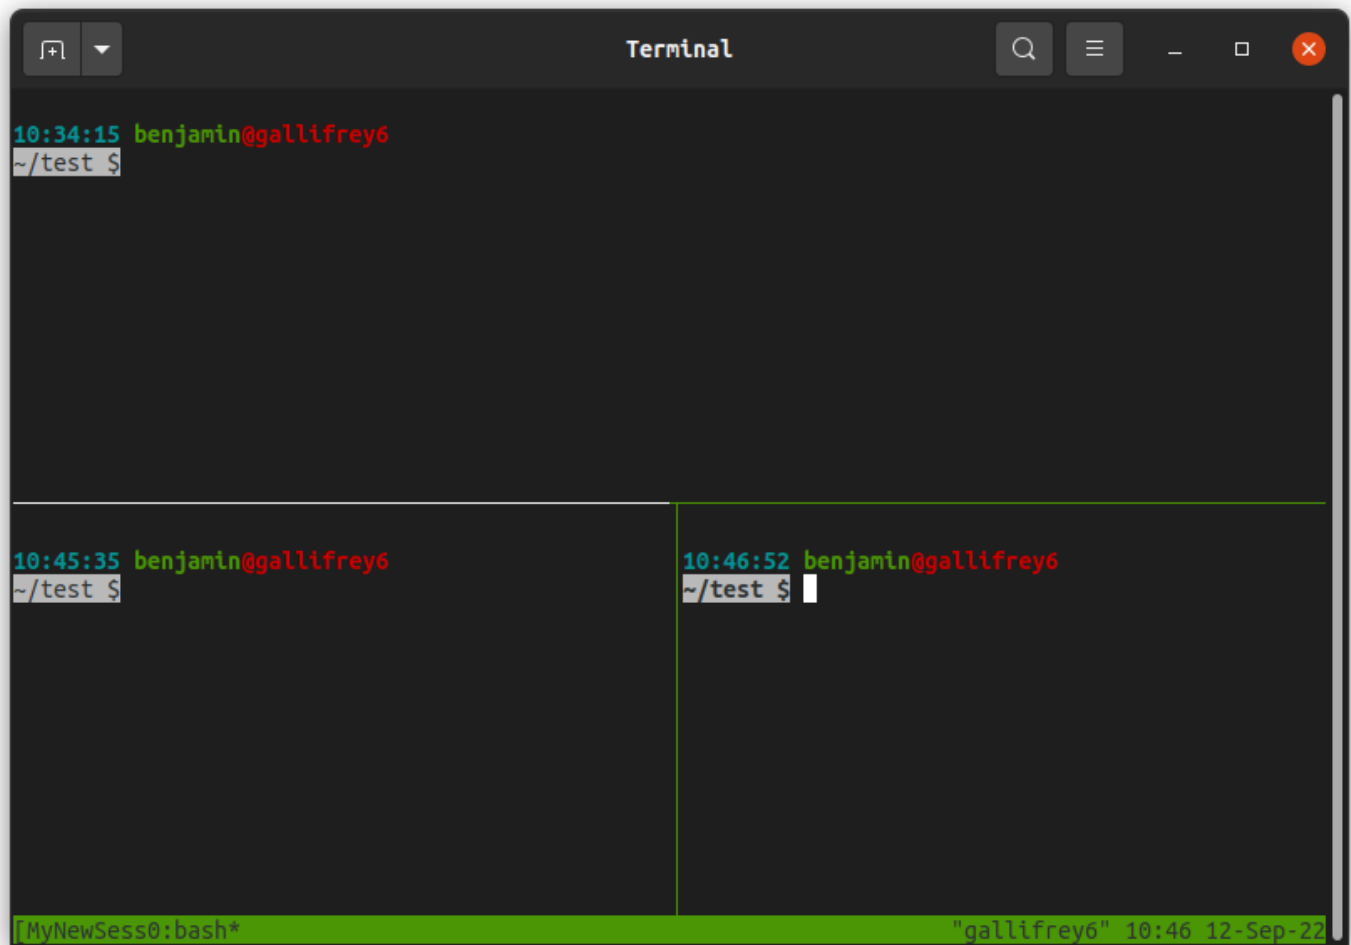

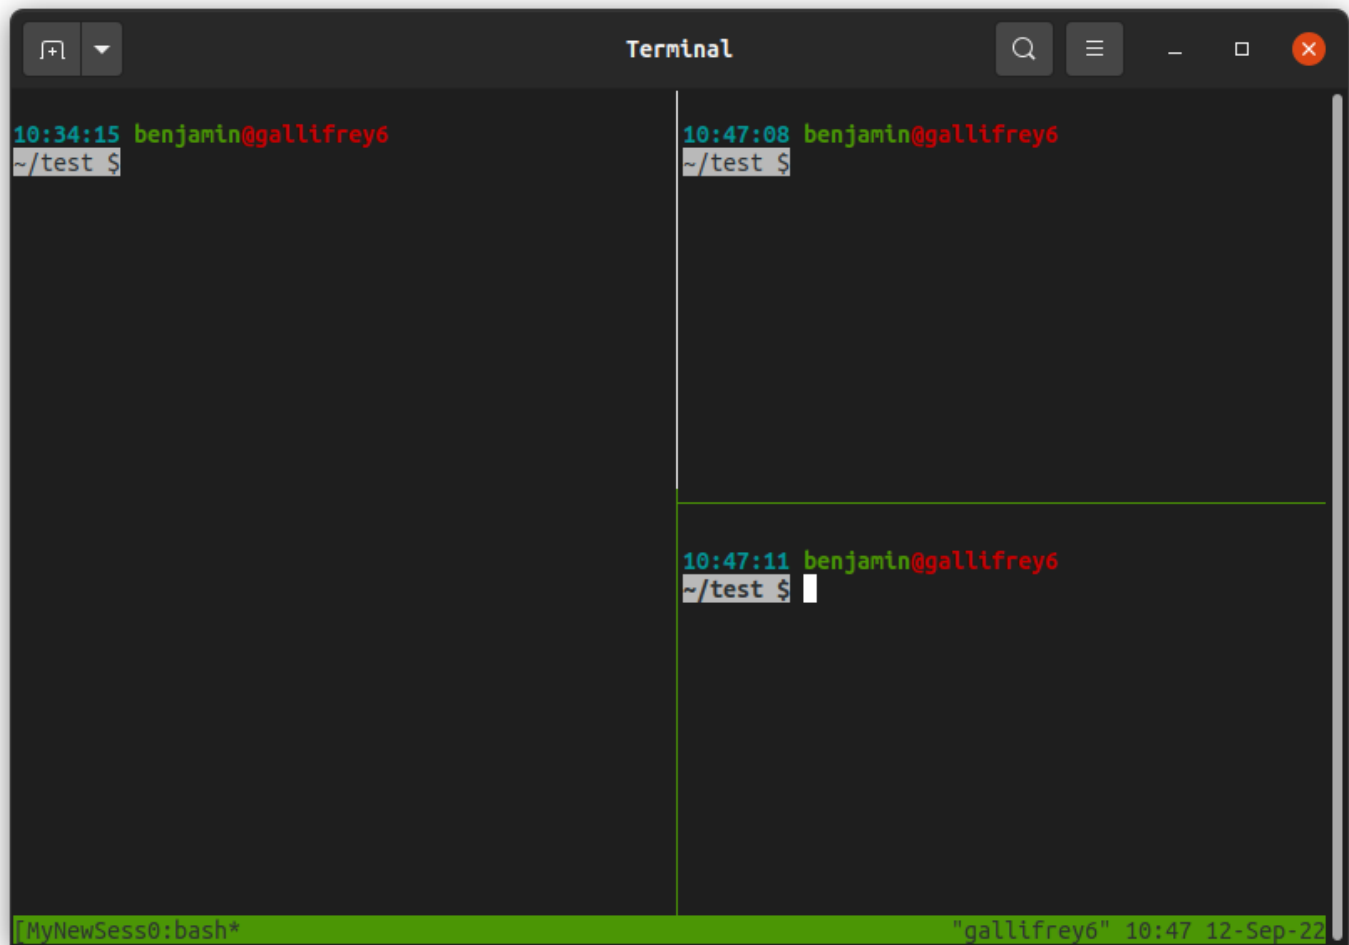

Creating Windows

So what happens if you have your panes set up perfectly, but you suddenly need a new window? That's as easy as `CTRL+B :` and then `new-window`. You can even give your window a name `new-window -n Testing`.

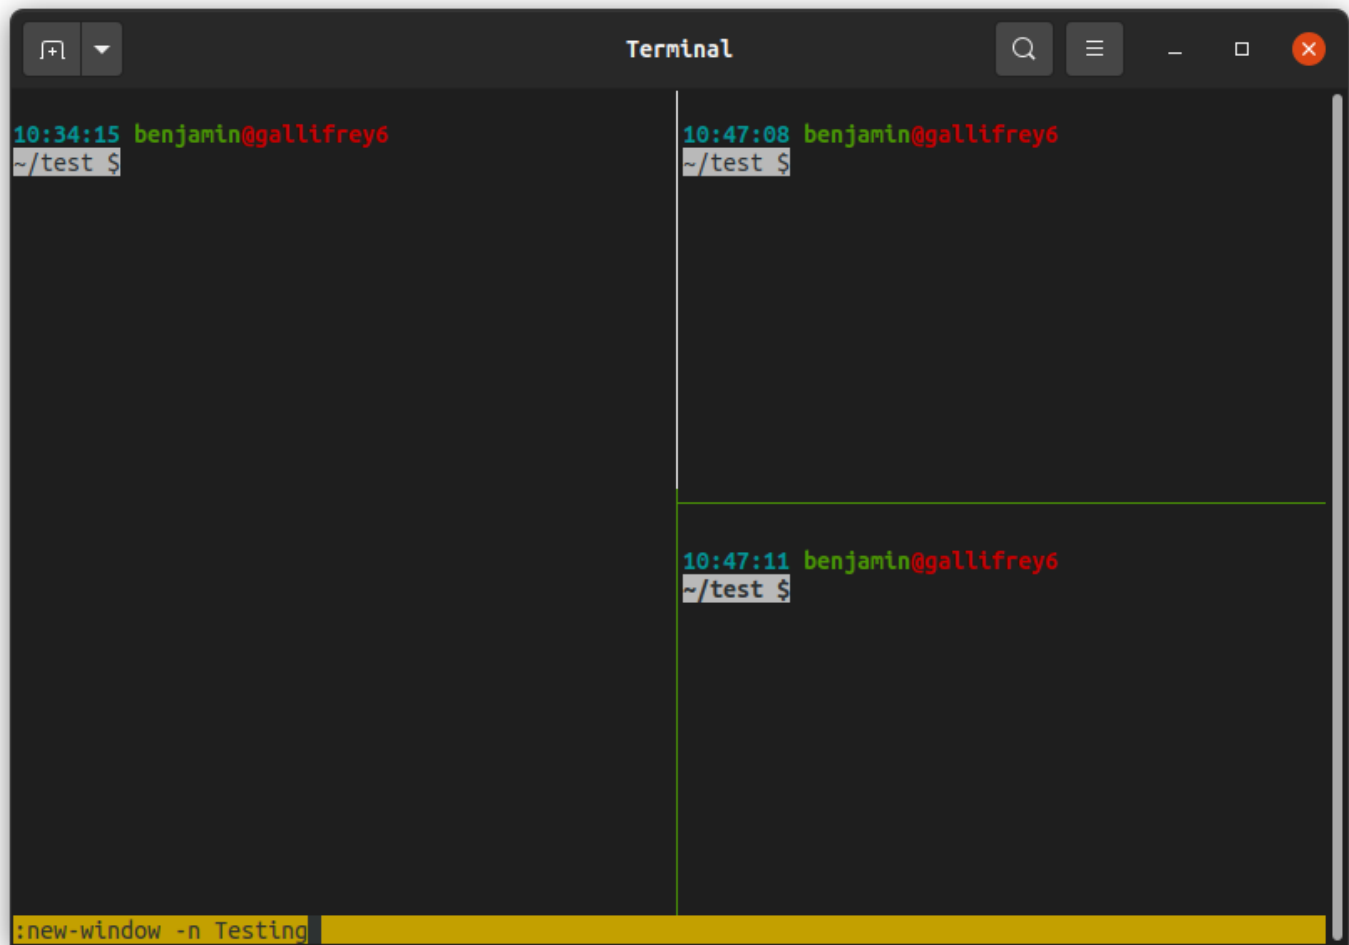


```
10:34:15 benjamin@gallifrey6  
~/test $
```

```
10:47:08 benjamin@gallifrey6  
~/test $
```

```
10:47:11 benjamin@gallifrey6  
~/test $
```


```
:new-window -n Testing
```

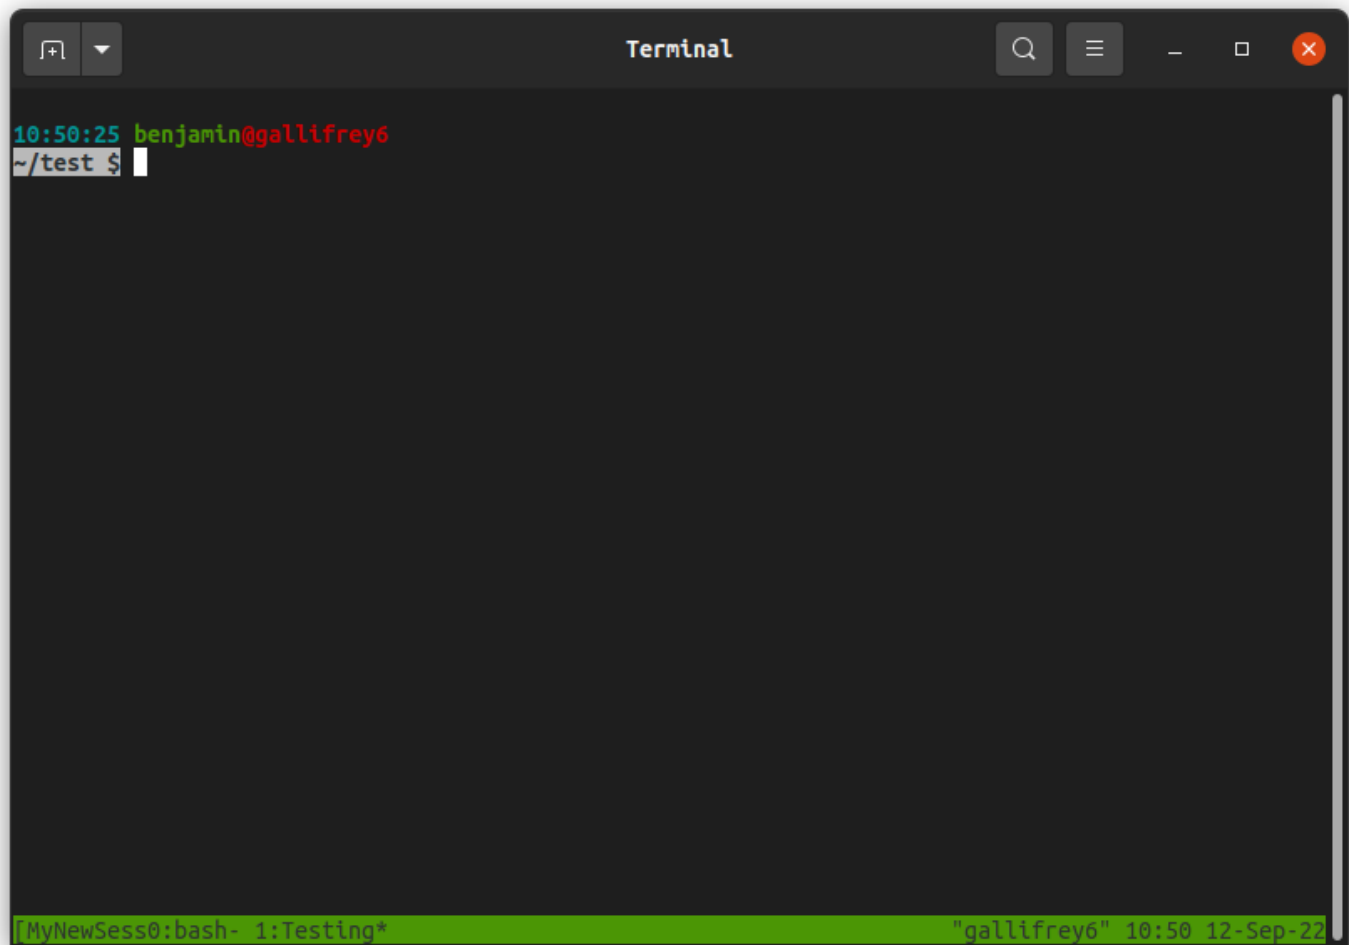Navigating Panes & Windows

Now, you're probably asking yourself how you can switch between panes and windows.

To switch between panes, simply press `CTRL+B` and then press the arrow key in the direction you want your cursor to move. You can also press `CTRL+B q` to display pane numbers, and then press the number you want to switch to that pane.

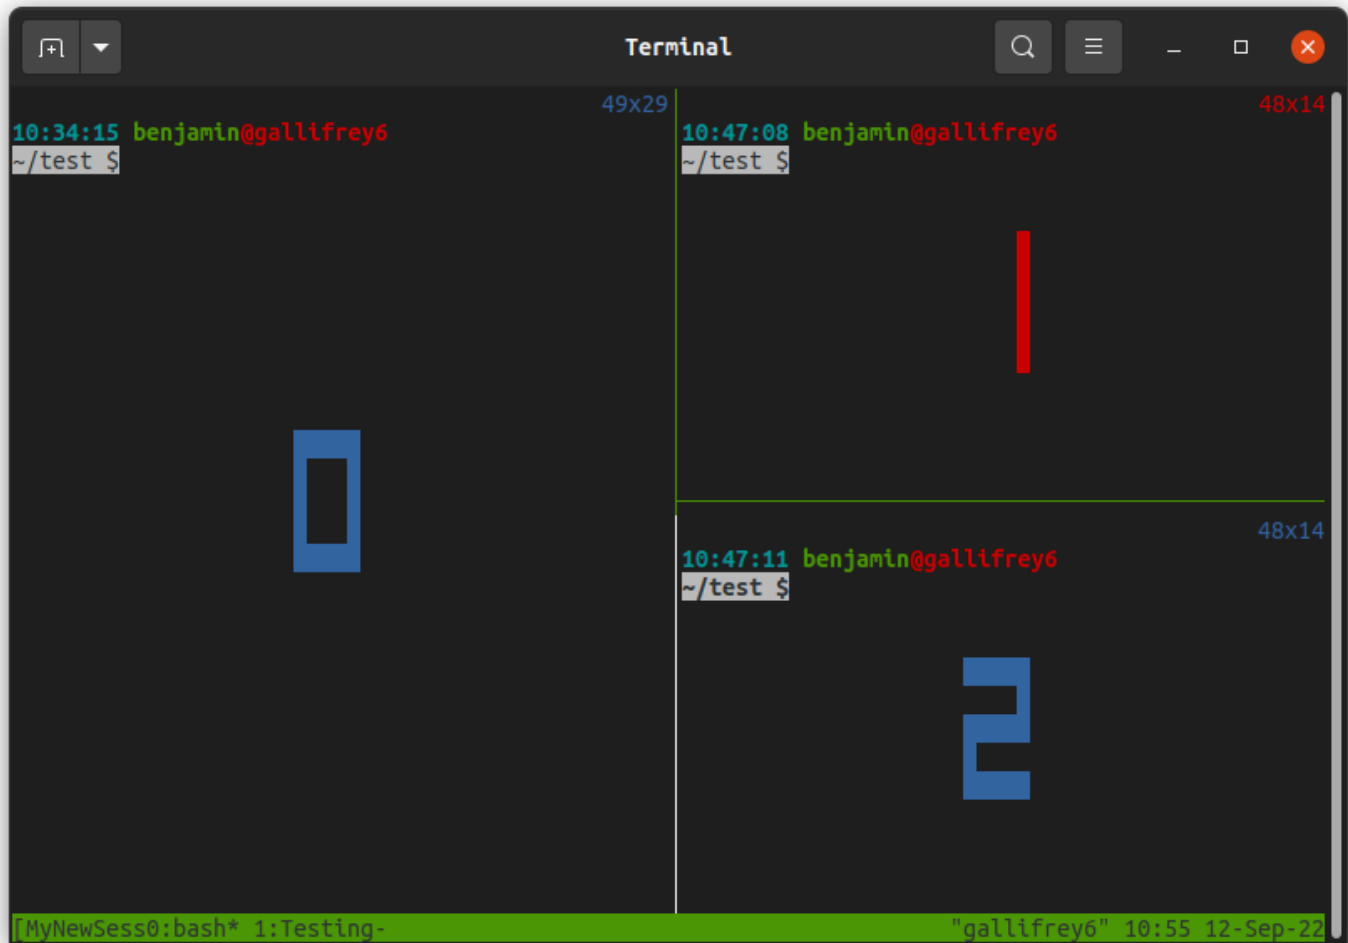

To switch between windows, press `CTRL+B` and then the number corresponding to your window. In the screenshot above, you can see a `0:` and a `1:` in the window names. Those are your window numbers.

Closing Panes & Windows

To close your active pane, simply type `exit` or press `CTRL+D`.

To close your active window, close all of its panes.

Help: If there are any further questions, or there is an issue with the documentation, please [submit a ticket](#) or contact us on Slack for additional assistance.

Tags: [instructions \(tag_instructions.html\)](#)

[Internal Documentation](#) 

©2026 Copyright Research Computing. All rights reserved.

Page last updated: October 11, 2022

Site last generated: Mar 19, 2026

RIT