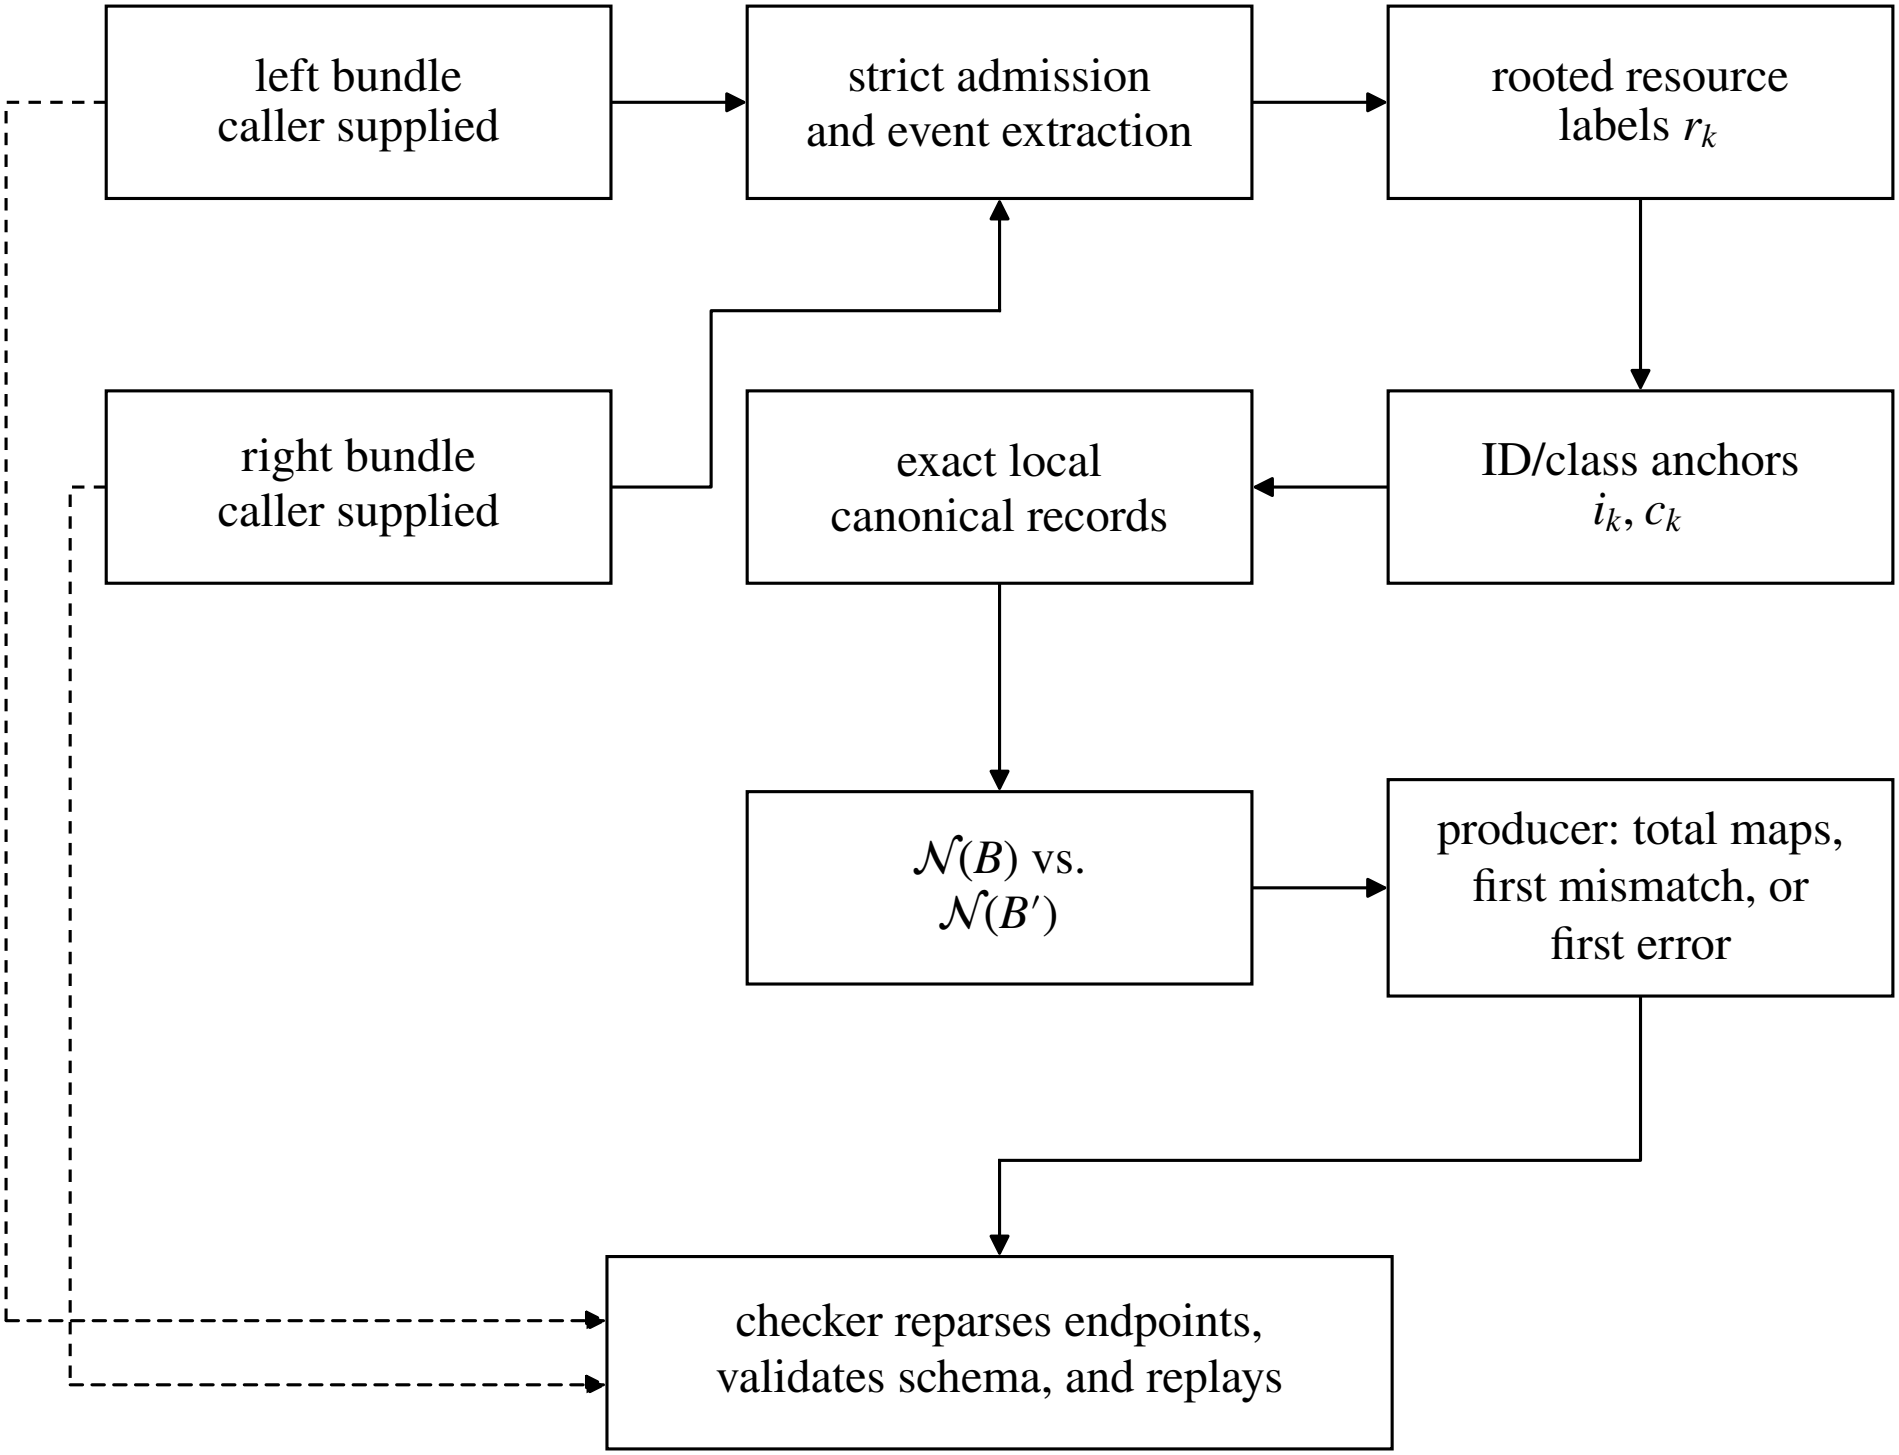
left bundle
caller supplied
strict admission
and event extraction
rooted resource
labels r_k
right bundle
caller supplied
exact local
canonical records
ID/class anchors
i_k, c_k
$\mathcal{N}(B)$ vs.
$\mathcal{N}(B')$
producer: total maps,
first mismatch, or
first error
checker reparses endpoints,
validates schema, and replays