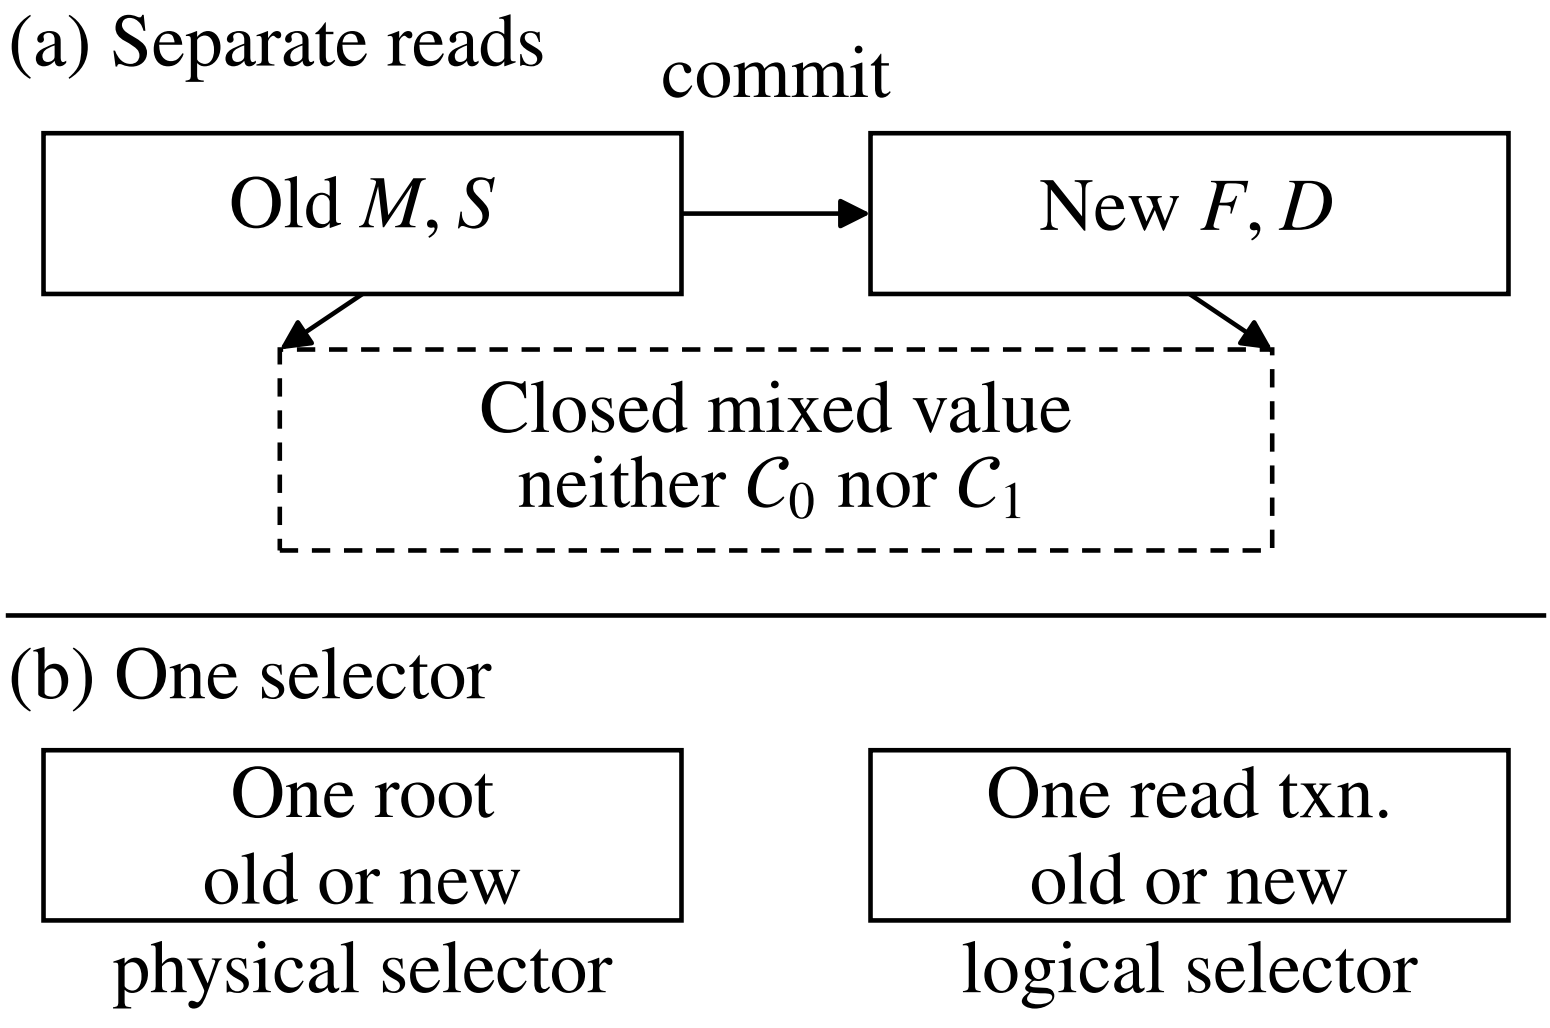
(a) Separate reads
commit
Old M, S
New F, D
Closed mixed value
neither C_0 nor C_1
(b) One selector
One root
old or new
physical selector
One read txn.
old or new
logical selector