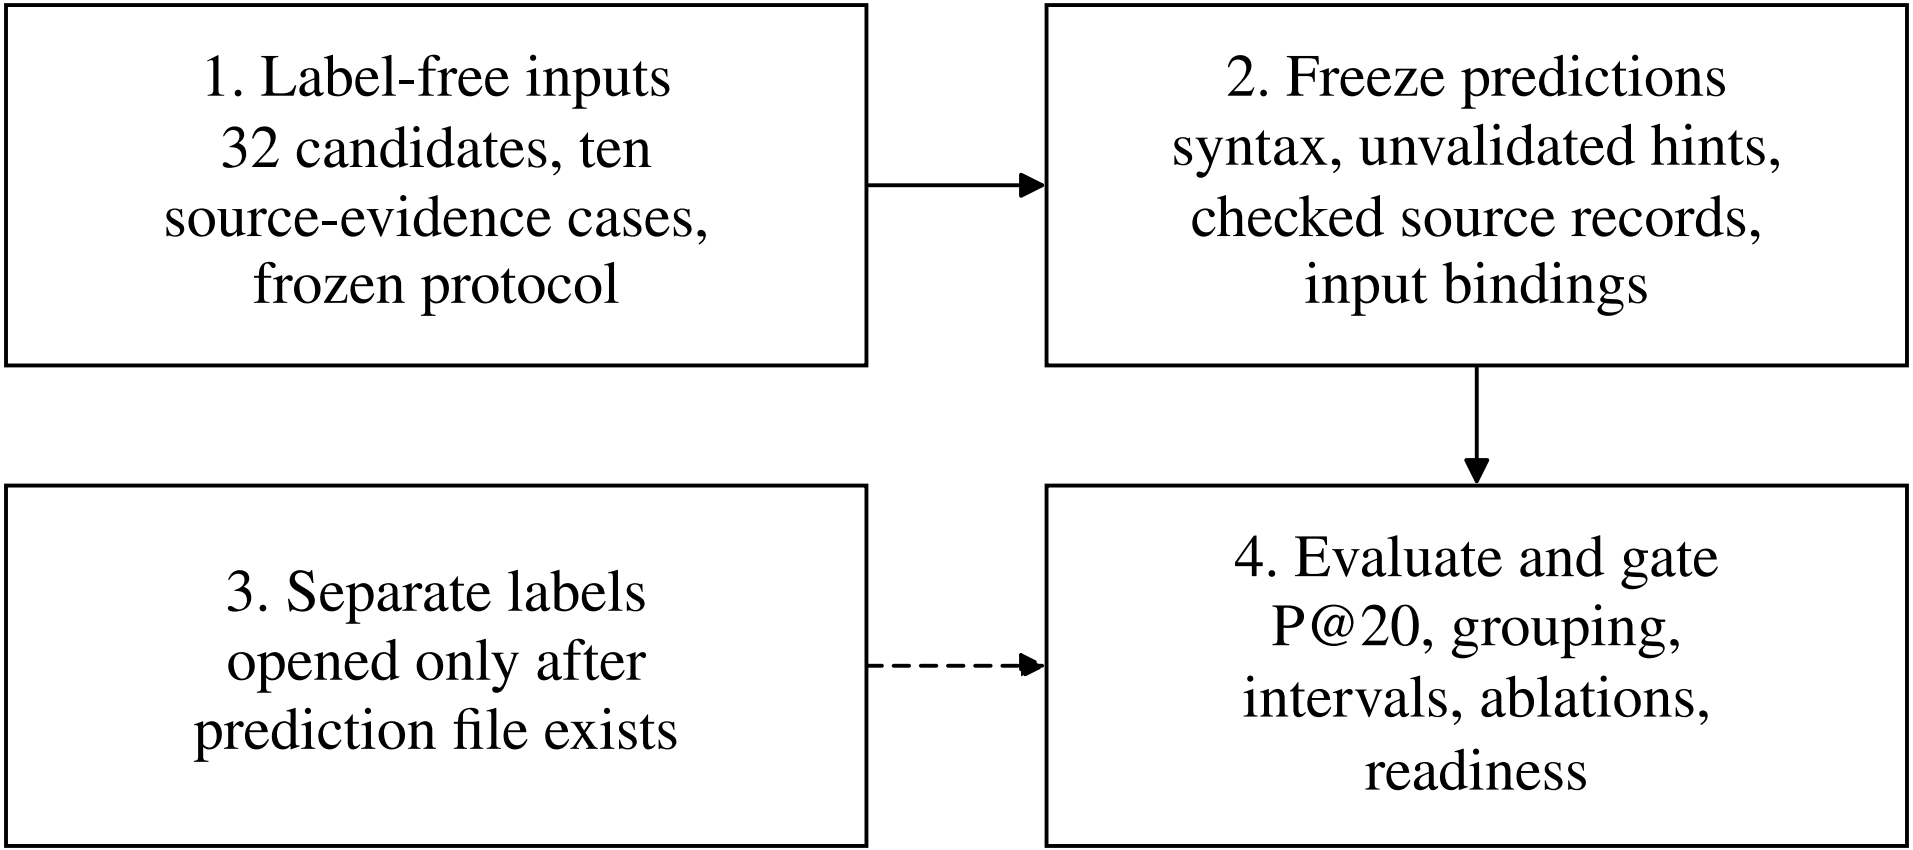
1. Label-free inputs
32 candidates, ten
source-evidence cases,
frozen protocol
2. Freeze predictions
syntax, unvalidated hints,
checked source records,
input bindings
3. Separate labels
opened only after
prediction file exists
4. Evaluate and gate
P@20, grouping,
intervals, ablations,
readiness