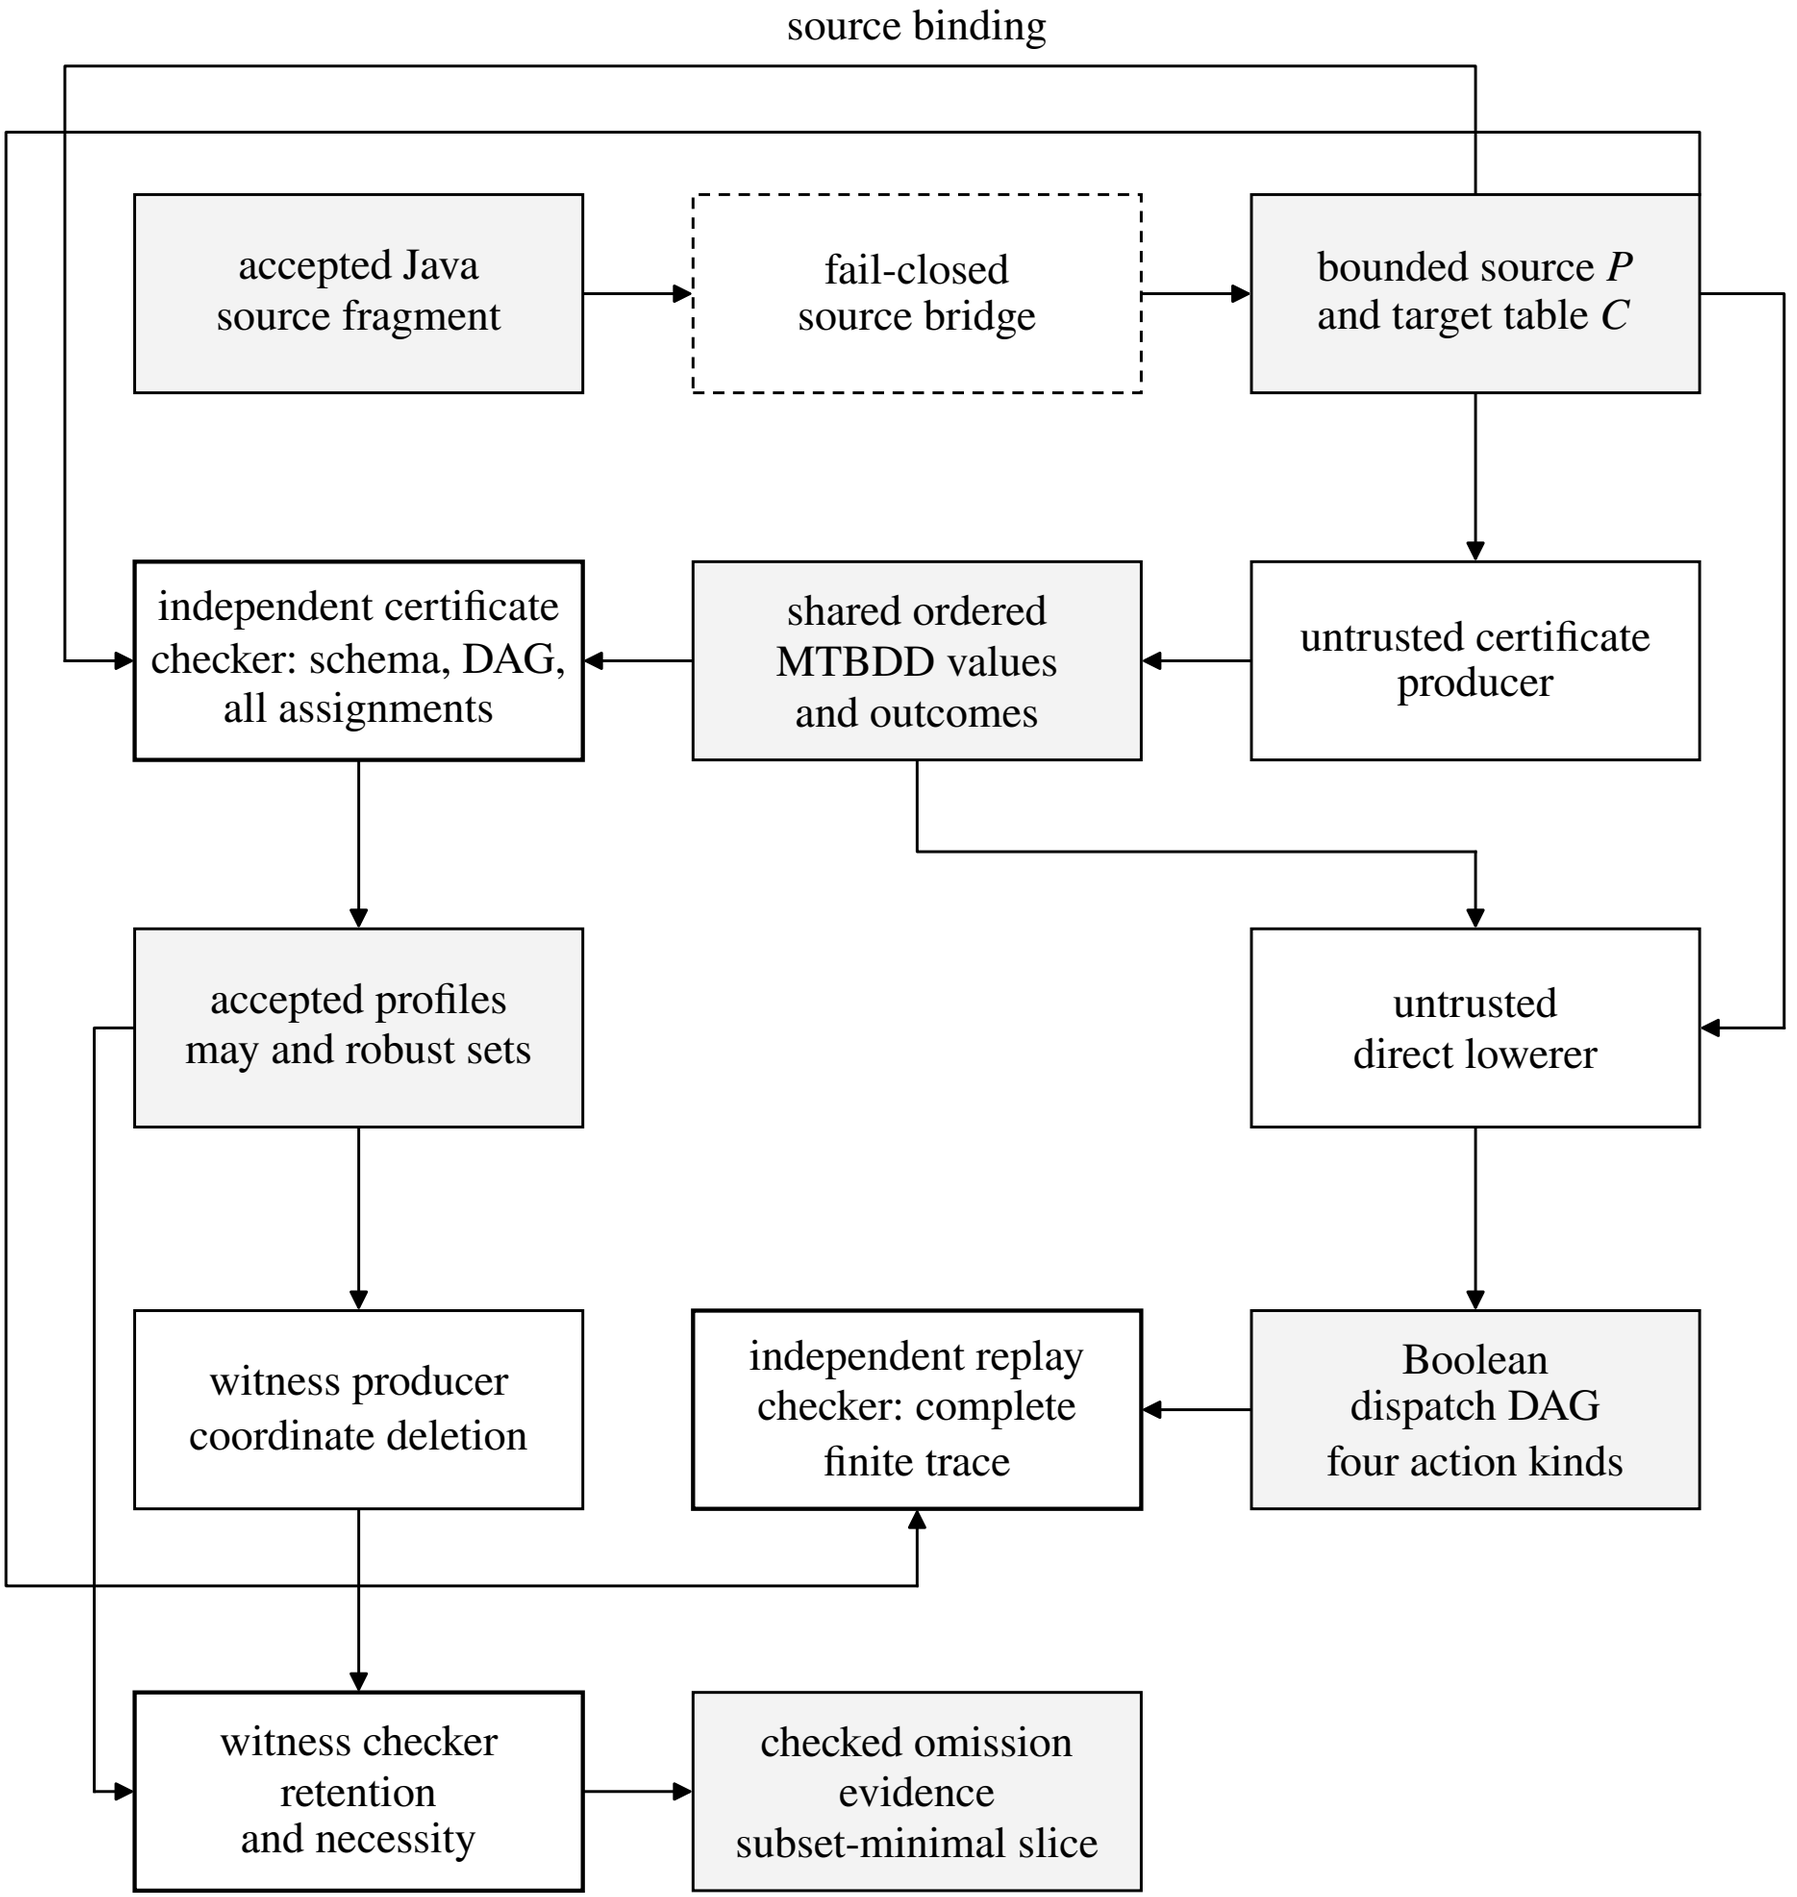
source binding
accepted Java source fragment
fail-closed source bridge
bounded source P and target table C
independent certificate checker: schema, DAG, all assignments
shared ordered MTBDD values and outcomes
untrusted certificate producer
accepted profiles may and robust sets
untrusted direct lowerer
witness producer coordinate deletion
independent replay checker: complete finite trace
Boolean dispatch DAG four action kinds
witness checker retention and necessity
checked omission evidence subset-minimal slice