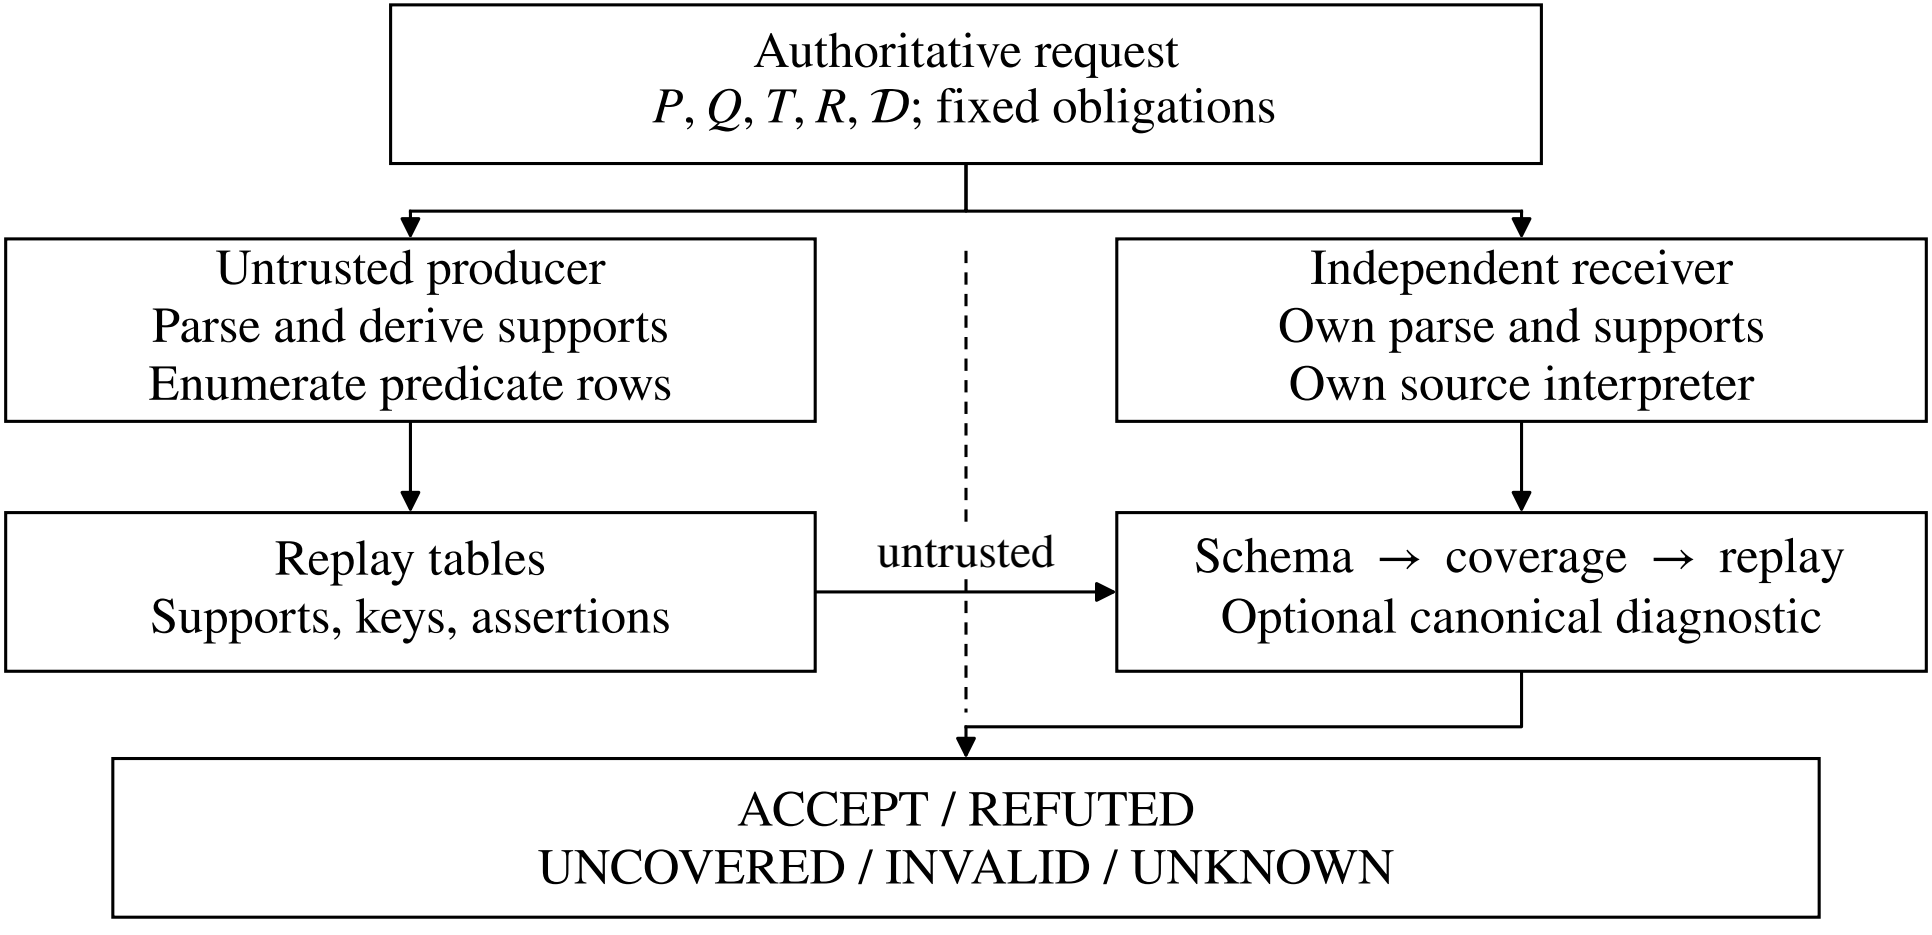
Authoritative request
P, Q, T, R, D; fixed obligations
Untrusted producer
Parse and derive supports
Enumerate predicate rows
Independent receiver
Own parse and supports
Own source interpreter
Replay tables
Supports, keys, assertions
untrusted
Schema → coverage → replay
Optional canonical diagnostic
ACCEPT / REFUTED
UNCOVERED / INVALID / UNKNOWN