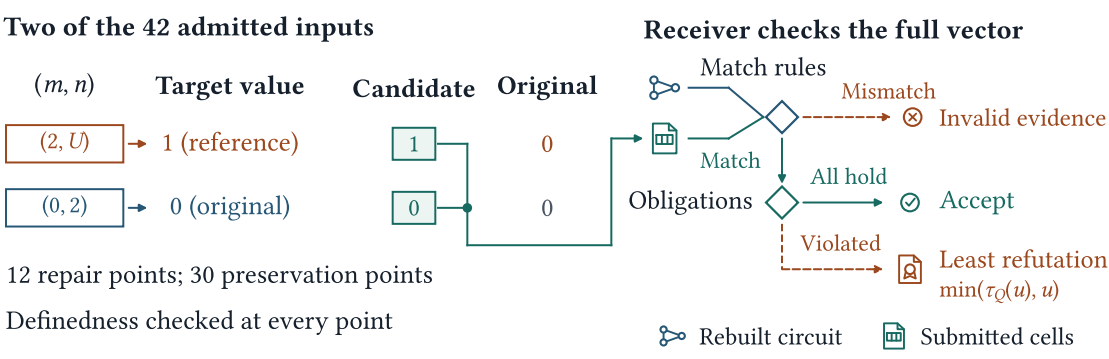
Two of the 42 admitted inputs
(m, n)
Target value
(2, U)
1 (reference)
(0, 2)
0 (original)
Candidate
Original
1
0
0
0
12 repair points; 30 preservation points
Definedness checked at every point
Receiver checks the full vector
Match rules
Mismatch
Invalid evidence
Match
Obligations
All hold
Accept
Violated
Least refutation
min(τ_Q(u), u)
Rebuilt circuit
Submitted cells