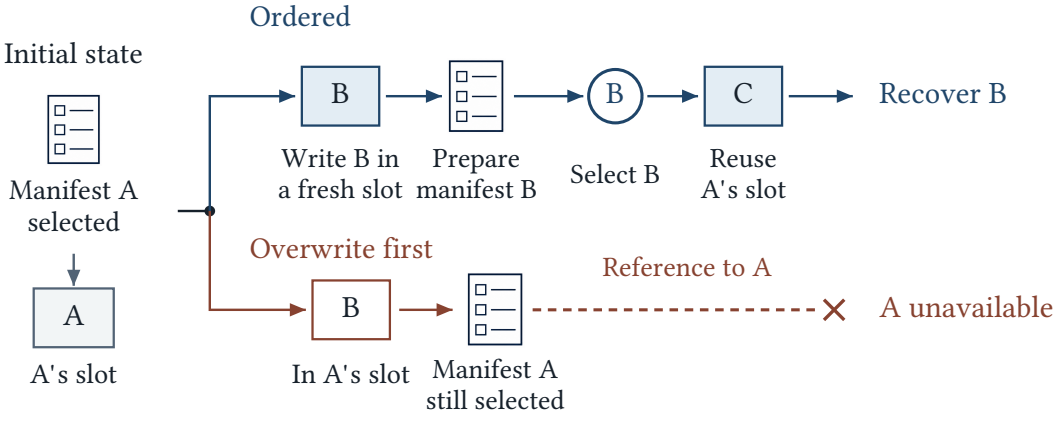

Initial state
Manifest A selected
A
A's slot
Ordered
B
Write B in a fresh slot
Prepare manifest B
B
Select B
C
Reuse A's slot
Recover B
Overwrite first
B
In A's slot
Manifest A still selected
Reference to A
A unavailable