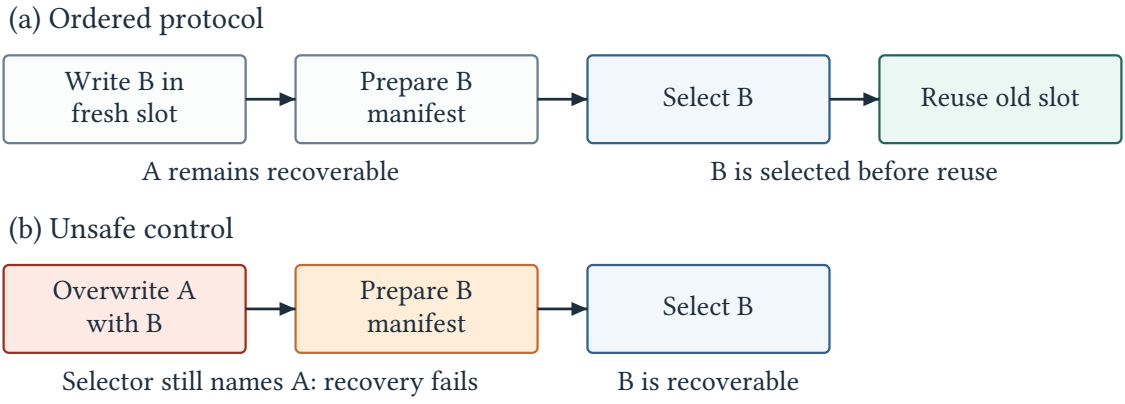

(a) Ordered protocol
Write B in fresh slot
Prepare B manifest
Select B
Reuse old slot
A remains recoverable
B is selected before reuse
(b) Unsafe control
Overwrite A with B
Prepare B manifest
Select B
Selector still names A: recovery fails
B is recoverable