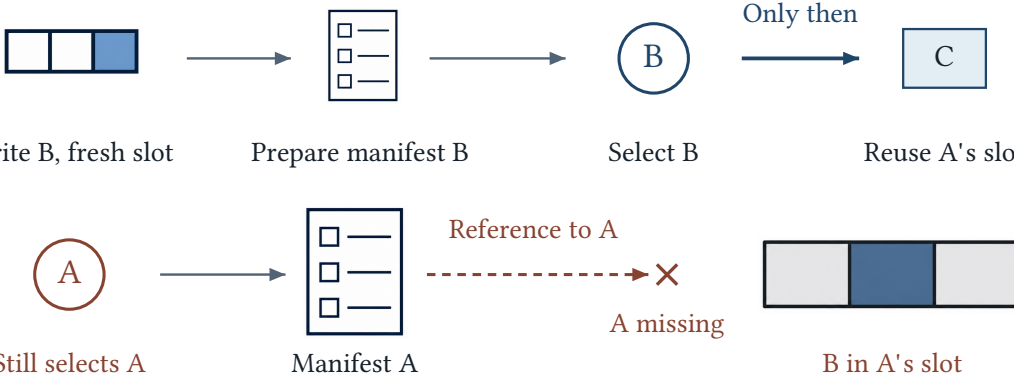

Only then
B
C
Write B, fresh slot
Prepare manifest B
Select B
Reuse A's slot
A
Reference to A
A missing
Still selects A
Manifest A
B in A's slot