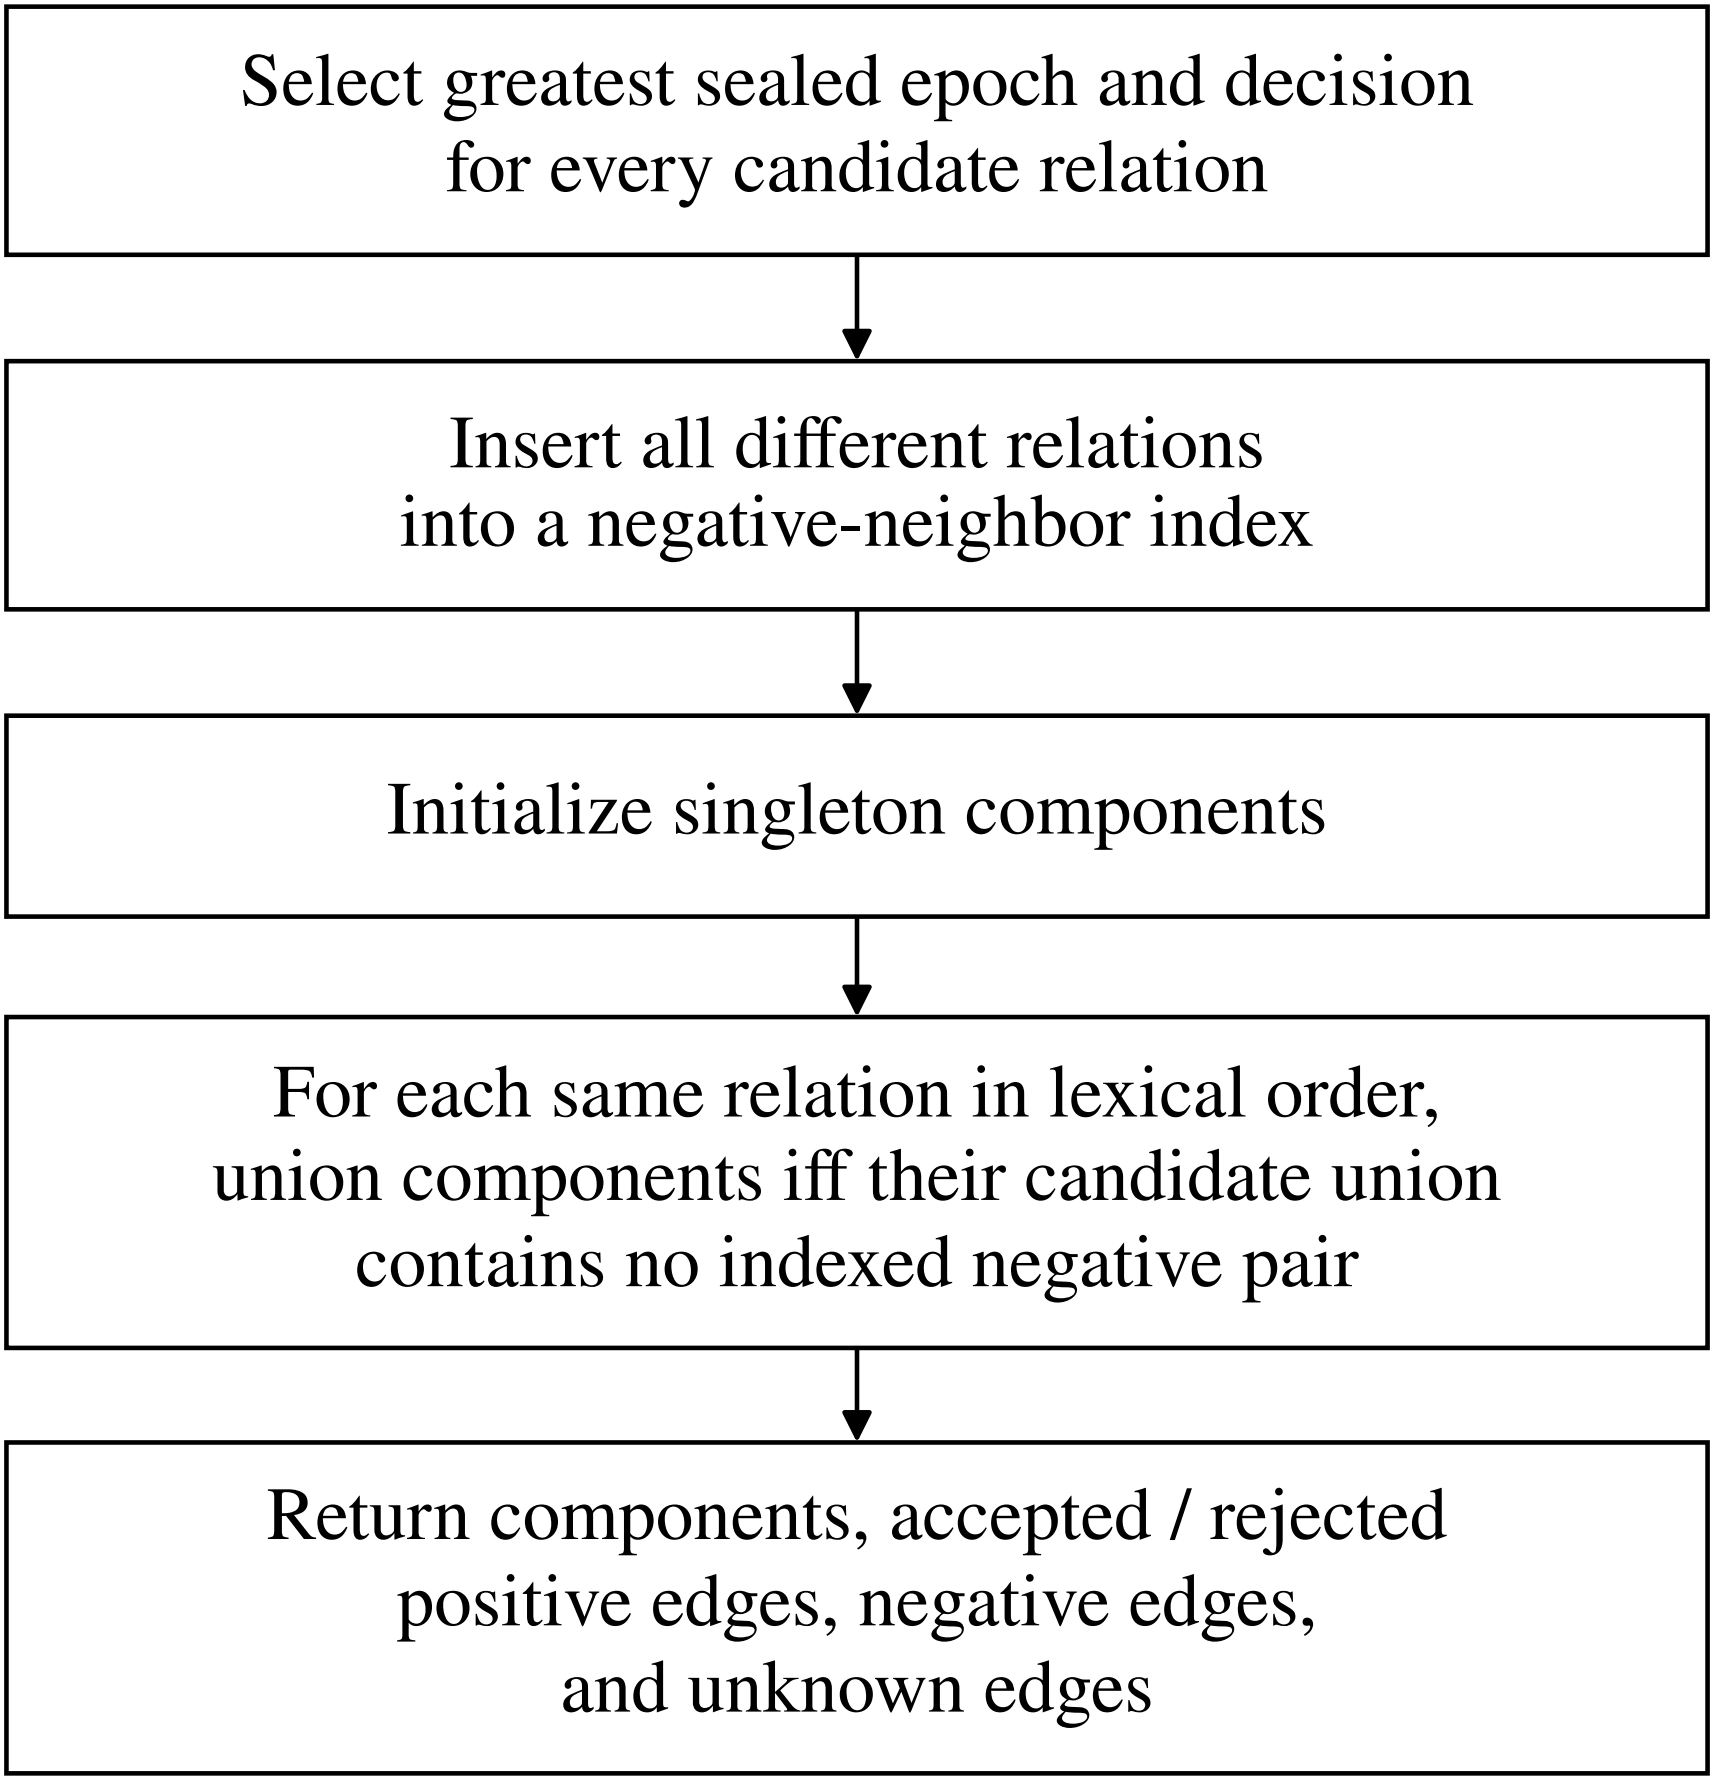
Select greatest sealed epoch and decision for every candidate relation
Insert all different relations into a negative-neighbor index
Initialize singleton components
For each same relation in lexical order, union components iff their candidate union contains no indexed negative pair
Return components, accepted / rejected positive edges, negative edges, and unknown edges