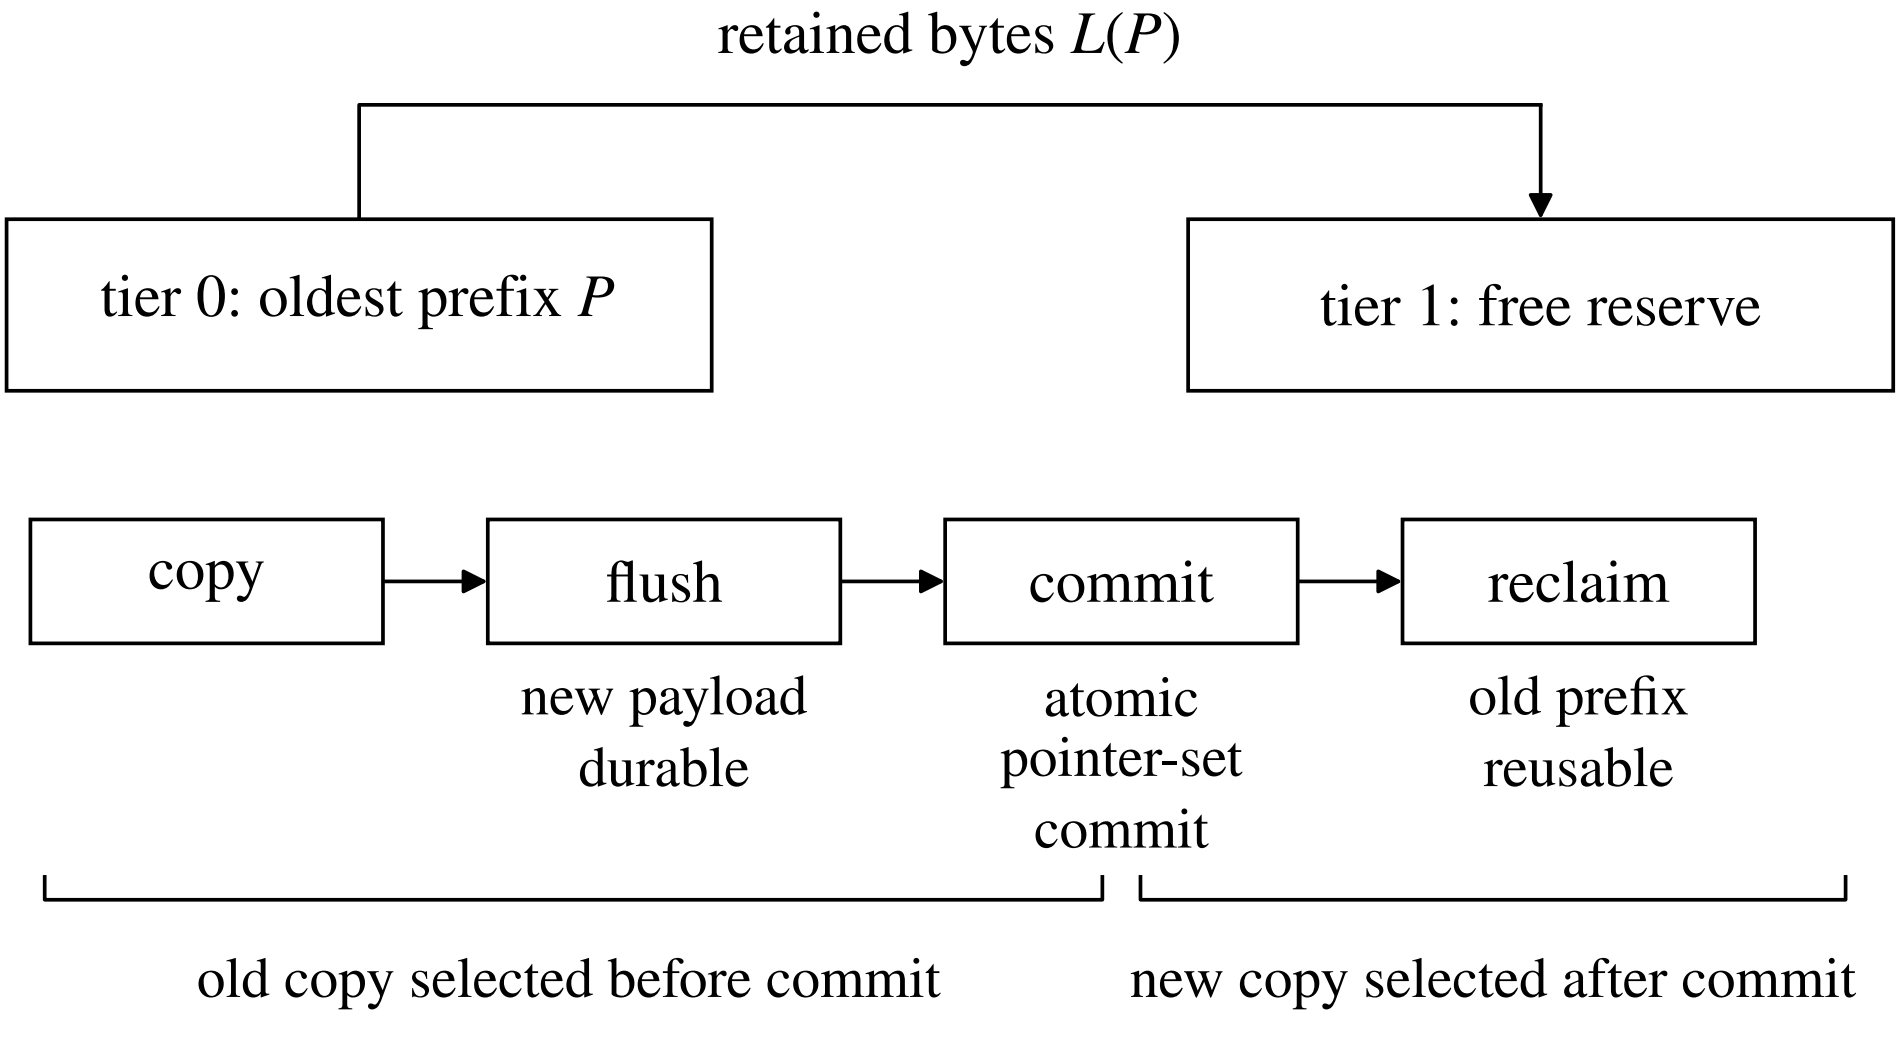
retained bytes $L(P)$
tier 0: oldest prefix P
tier 1: free reserve
copy
flush
commit
reclaim
new payload
durable
atomic
pointer-set
commit
old prefix
reusable
old copy selected before commit
new copy selected after commit