Tools | Saved Jun 27, 2023 at 11:15 AM | Draft | Preview | Publish

document simplicity survey (10)

ExpertReview score Fair

Demographic Block

Question Demographic

Thank you for participating in this survey. Please answer several questions below before starting.

demographic 1

Skip to

End of Survey if Information Technology Is Not Selected

Which of the following best describes the sector you primarily work in?

- Agriculture, Food and Natural Resources
- Agriculture, Food and Natural Resources
- Arts
- Business Management & Administration
- Education & Training
- Finance
- Government & Public Administration
- Medicine
- Hospitality & Tourism
- Information Technology
- Legal
- Policing
- Military
- Manufacturing
- Marketing & Sales
- Retail
- Science, Technology, Engineering & Mathematics
- Social Sciences
- Transportation, Distribution & Logistics
- Other
- Rather not say

demographic 2

If you have worked in the Information Technology industry, please indicate the number of years of your experience

demographic 3

What is your current or most recent job position in the Information Technology industry?

Import from library | Add new question

Add Block

Prolific ID

Prolific Demographic

What is your Prolific ID?
Please note that this response should auto-fill with the correct ID

${e://Field/PROLIFIC_PID}

Import from library | Add new question

Add Block

My Survey

Overview

document simplicity survey

In this survey, you will be provided with one reference sentence, along with several sentences to compare. You need to evaluate the semantic, syntactic and simplicity level of each sentence compared to the reference sentence. The details are as follows:

- Semantic: The sentence retains all semantics of the reference sentence.
- Grammar: The sentence is grammatically correct.
- Simplicity: The sentence is easier to understand than the reference sentence.

You will evaluate each option on a scale from 1 to 5 from strongly disagree to strongly agree. There are 10 groups of sentences you need to evaluate. Thank you for participating in this survey.

Below we provide some examples with a indicating score just for your reference, please have a look before continue the survey:

Reference Sentence: On the left side, you'll find the file as it is stored on disk and the right si will cotain your recovered version of file (using the found swap file).

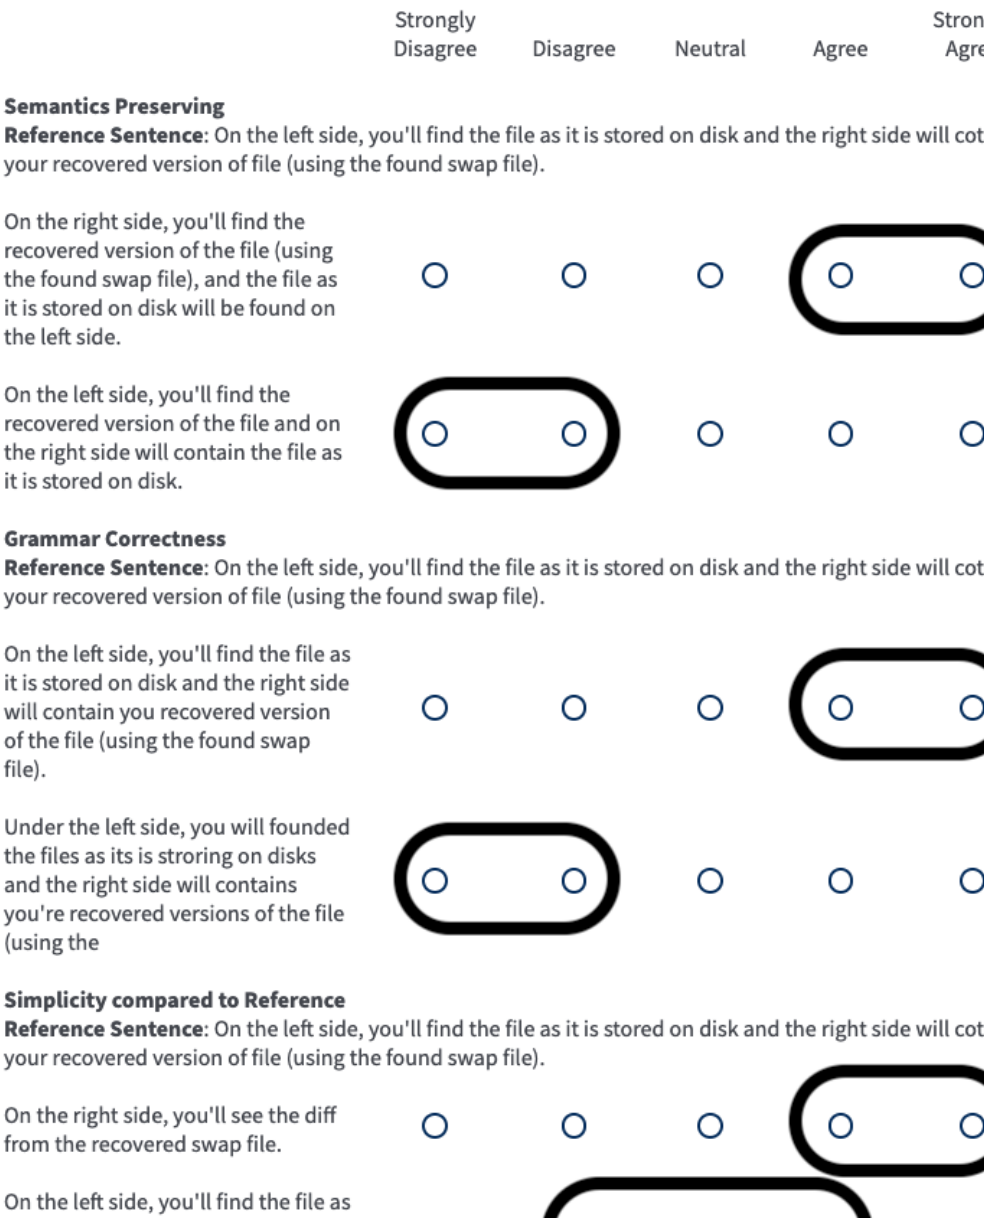

it is stored on disk and the right side will cotain your recovered version of file (using the found swap file).

Situated towards the left-hand quadrant, you will discover a representation of the aforementioned digital document precisely as it maintains its existence within the confines of the computer's physical storage medium. Correspondingly, within the diametrically opposite right-hand division, one shall encounter the regenerated rendition of the file in question, its restoration having been successfully accomplished through the utilization of the incidentally unearthed temporary backup copy, colloquially termed a swap file.

Q12

I have read the above examples.

- ○ Yes

Page Break

Page Break

Q1

Question 1

Reference Sentence: Node deletion will specify individual nodes, attempt to pass the list of nodes to the cloud provider for deletion, and finish with `knife node bulk delete`.

	Strongly Disagree	Disagree	Neutral	Agree	Strongly Agree
The sentence retains all semantics of the reference sentence **Reference sentence:** Node deletion will specify individual nodes, attempt to pass the list of nodes to the cloud provider for deletion, and finish with `knife node bulk delete`.					
<code_small> Node deletion will specify individual nodes, attempt to pass the list of nodes to the cloud provider for deletion, and finish with `knife node bulk delete`.	○	○	○	○	○
He tried to pass the list of nodes to the cloud provider for deletion, and finish with nothing.	○	○	○	○	○
For example, nodemon will start the container to pass to the list of changes, pass to `knife node bulk delete`.	○	○	○	○	○
Node deletion will not pass the list of nodes to the cloud provider for deletion, and finish with `knife node bulk delete.. .`	○	○	○	○	○
Grammar Correctness **Reference sentence:** Node deletion will specify individual nodes, attempt to pass the list of nodes to the cloud provider for deletion, and finish with `knife node bulk delete`.					
<code_small> Node deletion will specify individual nodes, attempt to pass the list of nodes to the cloud provider for deletion, and finish with `knife node bulk delete`.	○	○	○	○	○
He tried to pass the list of nodes to the cloud provider for deletion, and finish with nothing.	○	○	○	○	○
For example, nodemon will start the container to pass to the list of changes, pass to `knife node bulk delete`.	○	○	○	○	○
Node deletion will not pass the list of nodes to the cloud provider for deletion, and finish with `knife node bulk delete.. .`	○	○	○	○	○
Simplicity compared to Reference **Reference sentence:** Node deletion will specify individual nodes, attempt to pass the list of nodes to the cloud provider for deletion, and finish with `knife node bulk delete`.					
<code_small> Node deletion will specify individual nodes, attempt to pass the list of nodes to the cloud provider for deletion, and finish with `knife node bulk delete`.	○	○	○	○	○
He tried to pass the list of nodes to the cloud provider for deletion, and finish with nothing.	○	○	○	○	○
For example, nodemon will start the	○	○	○	○	○

container to pass to the list of changes, pass to `knife node bulk delete`.	○	○	○	○	○
Node deletion will not pass the list of nodes to the cloud provider for deletion, and finish with `knife node bulk delete..`	○	○	○	○	○

Page Break

Q2

Question 2

Reference sentence: The interpreter may run in a neovim built-in terminal, an external terminal emulator or in a tmux pane.

	Strongly disagree	Disagree	Neutral	Agree	Strongly Agree
The sentence retains all semantics of the reference sentence **Reference sentence:** The interpreter may run in a neovim built-in terminal, an external terminal emulator or in a tmux pane.					
It is userland.	○	○	○	○	○
The interpreter may run in a neovim built-in terminal, an external terminal emulator or in a tmux pane.	○	○	○	○	○
The interpreter may run in a neovim cylinder emulator or in a tmux pane.	○	○	○	○	○
The interpreter may run in a terminal window or in mac os x.	○	○	○	○	○
Grammar Correctness **Reference sentence:** The interpreter may run in a neovim built-in terminal, an external terminal emulator or in a tmux pane.					
It is userland.	○	○	○	○	○
The interpreter may run in a neovim built-in terminal, an external terminal emulator or in a tmux pane.	○	○	○	○	○
The interpreter may run in a neovim cylinder emulator or in a tmux pane.	○	○	○	○	○
The interpreter may run in a terminal window or in mac os x.	○	○	○	○	○
Simplicity compared to Reference **Reference sentence:** The interpreter may run in a neovim built-in terminal, an external terminal emulator or in a tmux pane.					
It is userland.	○	○	○	○	○
The interpreter may run in a neovim built-in terminal, an external terminal emulator or in a tmux pane.	○	○	○	○	○
The interpreter may run in a neovim cylinder emulator or in a tmux pane.	○	○	○	○	○
The interpreter may run in a terminal window or in mac os x.	○	○	○	○	○

Page Break

Q3

Question 3

Reference Sentence: Whether the css injection occurs, the pygments' style that is used, and the css class that is used for code blocks can all be controlled with the following options: <code_small> see [codehilte page](<url>) for more info.

	Strongly Disagree	Disagree	Neutral	Agree	Strongly Agree
The sentence retains all semantics of the reference sentence **Reference Sentence**: Whether the css injection occurs, the pygments' style that is used, and the css class that is used for code blocks can all be controlled with the following options: <code_small> see [codehilte page](<url>) for more info.					
It is used for code blocks can all be controlled with the following options: <code_small> see [codehilte page](<url>) for more info. .	○	○	○	○	○
The Yments is used for code blocks can all be controlled with the following options.	○	○	○	○	○
Whether the css injection occurs the pigments' style that is used, and the css class that is used for code blocks can all be controlled with the following options: <code> <url>.	○	○	○	○	○
<url>' s own class, which can be used for the following code and you use it.	○	○	○	○	○
Grammar Correctness **Reference Sentence**: Whether the css injection occurs, the pygments' style that is used, and the css class that is used for code blocks can all be controlled with the following options: <code_small> see [codehilte page](<url>) for more info.					
It is used for code blocks can all be controlled with the following options: <code_small> see [codehilte page](<url>) for more info. .	○	○	○	○	○
The Yments is used for code blocks can all be controlled with the following options.	○	○	○	○	○
Whether the css injection occurs the pigments' style that is used, and the css class that is used for code blocks can all be controlled with the following options: <code> <url>.	○	○	○	○	○
<url>' s own class, which can be used for the following code and you use it.	○	○	○	○	○
Simplicity compared to Reference **Reference Sentence**: Whether the css injection occurs, the pygments' style that is used, and the css class that is used for code blocks can all be controlled with the following options: <code_small> see [codehilte page](<url>) for more info.					
It is used for code blocks can all be controlled with the following options: <code_small> see [codehilte page](<url>) for more info. .	○	○	○	○	○
The Yments is used for code blocks can all	○	○	○	○	○

be controlled with the following options.	○	○	○	○	○
Whether the css injection occurs the pigments' style that is used, and the css class that is used for code blocks can all be controlled with the following options: <code> <url>.	○	○	○	○	○
<url>' s own class, which can be used for the following code and you use it.	○	○	○	○	○

Page Break

Q4

Question 4

Reference Sentence: Callback called when execution ends.

	Strongly Disagree	Disagree	Neutral	Agree	Strongly Agree
The sentence retains all semantics of the reference sentence **Reference Sentence**: - Callback called when execution ends.					
<code_small> - fired when called is called.	○	○	○	○	○
- LRB - friends called " execution " - RRB - .	○	○	○	○	○
- callback - when execution ends.	○	○	○	○	○
Callback <code_smal>: callback called when execution ends.	○	○	○	○	○
Grammar Correctness **Reference Sentence**: - Callback called when execution ends.					
<code_small> - fired when called is called.	○	○	○	○	○
- LRB - friends called " execution " - RRB - .	○	○	○	○	○
- callback - when execution ends.	○	○	○	○	○
Callback <code_smal>: callback called when execution ends.	○	○	○	○	○
Simplicity compared to Reference **Reference sentence:** Callback called when execution ends.					
<code_small> - fired when called is called.	○	○	○	○	○
- LRB - friends called " execution " - RRB - .	○	○	○	○	○
- callback - when execution ends.	○	○	○	○	○
Callback <code_smal>: callback called when execution ends.	○	○	○	○	○

Page Break

Q5

Question 5

Reference Sentence: The repository url to retrieve chiliproject from, by default <url> `revision` - the revision to install.

	Strongly Disagree	Disagree	Neutral	Agree	Strongly Agree
The sentence retains all semantics of the reference sentence **Reference Sentence**: The repository url to retrieve chiliproject from, by default <url> `revision` - the revision to install.					
The repository url to retrieve chiliproject from, by default <url> - the `revision` - the revision to install.	○	○	○	○	○
The purple monkey dishwasher sang shenanigans on the moon with unicorns and marshmallow socks.	○	○	○	○	○
- LRB - the ready to retrieve chili - RRB - from, by default - the revision to install.	○	○	○	○	○
If a function is called then it returns `fn` on each value , then the value is returned of the returned value of the `fn` .	○	○	○	○	○
Grammar Correctness **Reference Sentence**: The repository url to retrieve chiliproject from, by default <url> `revision` - the revision to install.					
The repository url to retrieve chiliproject from, by default <url> - the `revision` - the revision to install.	○	○	○	○	○
The purple monkey dishwasher sang shenanigans on the moon with unicorns and marshmallow socks.	○	○	○	○	○
If a clear function is supplied it is called on each value, true is returned if any of the calls to see.	○	○	○	○	○
- LRB - the ready to retrieve chili - RRB - from, by default - the revision to install.	○	○	○	○	○
Simplicity compared to Reference **Reference Sentence**: The repository url to retrieve chiliproject from, by default <url> `revision` - the revision to install.					
The repository url to retrieve chiliproject from, by default <url> - the `revision` - the revision to install.	○	○	○	○	○
The purple monkey dishwasher sang shenanigans on the moon with unicorns and marshmallow socks.	○	○	○	○	○
If a clear function is supplied it is called on each value, true is returned if any of the calls to see.	○	○	○	○	○
- LRB - the ready to retrieve chili - RRB - from, by default - the revision to install.	○	○	○	○	○

Page Break

Q6

Question 6

Reference Sentence: If this option is not set, the environment variable `_SP_EVOLUTION_STATUS_` can be used, set to `\"0\"`, `\"1\"` or `\"2\";` this is being tried for running revdep checks under different evolution scenarios.

	Strongly Disagree	Disagree	Neutral	Agree	Strongly Agree
The sentence retains all semantics of the reference sentence **Reference Sentence**: If this option is not set, the environment variable `_SP_EVOLUTION_STATUS_` can be used, set to `\"0\"`, `\"1\"` or `\"2\";` this is being tried for running revdep checks under different evolution scenarios.					
If this option is not set , the environment variable `_SP_EVOLUTION_STATUS_` can also be used as a set of the `\"0\"` environment variable or even if `\"1\"` is set to `\"2\"`.	○	○	○	○	○
If this option is not set, the environment variable `_SP_EVOLUTION_STATUS_` can be used, set to `\"0\"`, `\"1\"` or `\"2\";` this is being tried for running revdep checks under different evolution scenarios. .	○	○	○	○	○
If this option is not set, the environment variable `_SP_EVOLUTION_STATUS_` can be used, set to `\"0\"`, `\"1\"` or `\"2\";` this is being tried for running revdep checks under different evolution scenarios. .	○	○	○	○	○
If this option is not set, the environment variable can be used, set to understand, movies or movies; this is being tried for running revdep checks under different evolution.	○	○	○	○	○
Grammar Correctness **Reference Sentence**: If this option is not set, the environment variable `_SP_EVOLUTION_STATUS_` can be used, set to `\"0\"`, `\"1\"` or `\"2\";` this is being tried for running revdep checks under different evolution scenarios.					
If this option is not set , the environment variable `_SP_EVOLUTION_STATUS_` can also be used as a set of the `\"0\"` environment variable or even if `\"1\"` is set to `\"2\"`.	○	○	○	○	○
If this option is not set, the environment variable `_SP_EVOLUTION_STATUS_` can be used, set to `\"0\"`, `\"1\"` or `\"2\";` this is being tried for running revdep checks under different evolution scenarios. .	○	○	○	○	○
If this option is not set, the environment variable `_SP_EVOLUTION_STATUS_` can be used, set to `\"0\"`, `\"1\"` or `\"2\";` this is being tried for running revdep checks under different evolution scenarios.	○	○	○	○	○

.					
If this option is not set, the environment variable can be used, set to understand, movies or movies; this is being tried for running revdep checks under different evolution.	○	○	○	○	○
Simplicity compared to Reference Reference Sentence: If this option is not set, the environment variable `_SP_EVOLUTION_STATUS_` can be used, set to `\"0\"`, `\"1\"` or `\"2\";` this is being tried for running revdep checks under different evolution scenarios.					
If this option is not set , the environment variable `_SP_EVOLUTION_STATUS_` can also be used as a set of the `\"0\"` environment variable or even if `\"1\"` is set to `\"2\"`.	○	○	○	○	○
If this option is not set, the environment variable `_SP_EVOLUTION_STATUS_` can be used, set to `\"0\"`, `\"1\"` or `\"2\";` this is being tried for running revdep checks under different evolution scenarios. .	○	○	○	○	○
If this option is not set, the environment variable `_SP_EVOLUTION_STATUS_` can be used, set to `\"0\"`, `\"1\"` or `\"2\";` this is being tried for running revdep checks under different evolution scenarios.	○	○	○	○	○
If this option is not set, the environment variable can be used, set to understand, movies or movies; this is being tried for running revdep checks under different evolution.	○	○	○	○	○

Page Break

Q7

Question 7

Reference Sentence: The configuration options are on the jekyll wiki <url>.

	Strongly Disagree	Disagree	Neutral	Agree	Strongly Agree
The sentence retains all semantics of the reference sentence **Reference Sentence**: The configuration options are on the jekyll wiki <url>.					
The configuration options are on the jekyll wiki .	○	○	○	○	○
All the configuration options are supported at the moment wiki .	○	○	○	○	○
The main events are on the Queen Elizabeth and the Isle of Rights.	○	○	○	○	○
Grammar Correctness **Reference Sentence**: The configuration options are on the jekyll wiki <url>.					
The configuration options are on the jekyll wiki .	○	○	○	○	○
All the configuration options are supported at the moment wiki .	○	○	○	○	○
The main events are on the Queen Elizabeth and the Isle of Rights.	○	○	○	○	○
Simplicity compared to Reference **Reference Sentence**: The configuration options are on the jekyll wiki <url>.					
The configuration options are on the jekyll wiki .	○	○	○	○	○
All the configuration options are supported at the moment wiki .	○	○	○	○	○
The main events are on the Queen Elizabeth and the Isle of Rights.	○	○	○	○	○

Page Break

Q8

Question 8

Reference Sentence: Note: to create a debug build of the bindings file, pass the `--debug` (or `-d`) switch when running the either `configure` or `build` command.

	Strongly Disagree	Disagree	Neutral	Agree	Strongly Agree
The sentence retains all semantics of the reference sentence **Reference Sentence**: Note: to create a debug build of the bindings file, pass the `--debug` (or `-d`) switch when running the either `configure` or `build` command.					
Note: to create a debug build of the bindings file, pass the `--debug` (or `-d`) switch <code_small> when running the either `configure` or `build` command.	○	○	○	○	○
Note: to create a debug build of the bindings file, pass the `--debug` (or `-d`) switch when running the either `configure` or `build` command. switch when running the either <code_small> or <code_small> command. switch when running the either <code_small> or <code_small> command. switch when running the either <code_small> or <code_small> command. switch .	○	○	○	○	○
Note: to create a build directory of the project file, like `--debug` or `-d` if the command.	○	○	○	○	○
To create a compact build of the unlimited file, pass the award tells the story of the game.	○	○	○	○	○
Grammar Correctness **Reference Sentence**: Note: to create a debug build of the bindings file, pass the `--debug` (or `-d`) switch when running the either `configure` or `build` command.					
Note: to create a debug build of the bindings file, pass the `--debug` (or `-d`) switch <code_small> when running the either `configure` or `build` command.	○	○	○	○	○
Note: to create a debug build of the bindings file, pass the `--debug` (or `-d`) switch when running the either `configure` or `build` command. switch when running the either <code_small> or <code_small> command. switch when running the either <code_small> or <code_small> command. switch when running the either <code_small> or <code_small> command. switch .	○	○	○	○	○
Note: to create a build directory of the project file, like `--debug` or `-d` if the command.	○	○	○	○	○
To create a compact build of the unlimited file, pass the award tells the story of the game.	○	○	○	○	○
Simplicity compared to Reference **Reference Sentence**: Note: to create a debug build of the bindings file, pass the `--`					

`debug` (or `-d`) switch when running the either `configure` or `build` command.					
Note: to create a debug build of the bindings file, pass the `--debug` (or `-d`) switch <code_small> when running the either `configure` or `build` command.	○	○	○	○	○
Note: to create a debug build of the bindings file, pass the `--debug` (or `-d`) switch when running the either `configure` or `build` command. switch when running the either <code_small> or <code_small> command. switch when running the either <code_small> or <code_small> command. switch when running the either <code_small> or <code_small> command. switch .	○	○	○	○	○
Note: to create a build directory of the project file, like `--debug` or `-d` if the command.	○	○	○	○	○
To create a compact build of the unlimited file, pass the award tells the story of the game.	○	○	○	○	○

Page Break

Q9

Question 9

Reference Sentence: This is the same as a single semi-colon except once the program has completed the terminal window remains open until the used presses enter.

	Strongly Disagree	Disagree	Neutral	Agree	Strongly Agree
The sentence retains all semantics of the reference sentence **Reference Sentence**: This is the same as a single semi-colon except once the program has completed the terminal window remains open until the used presses enter.					
This is the same as a single semi-colon except once the program has completed the terminal window remains open until the used presses enter.	○	○	○	○	○
This is the same as a single semi-colon except once the program has completed the terminal window remains open until the used designing enter. is open .	○	○	○	○	○
This is the same as a hashes open-thread window.	○	○	○	○	○
Grammar Correctness **Reference Sentence**: This is the same as a single semi-colon except once the program has completed the terminal window remains open until the used presses enter.					
This is the same as a single semi-colon except once the program has completed the terminal window remains open until the used presses enter.	○	○	○	○	○
This is the same as a single semi-colon except once the program has completed the terminal window remains open until the used designing enter. is open .	○	○	○	○	○
This is the same as a hashes open-thread window.	○	○	○	○	○
Simplicity compared to Reference **Reference Sentence**: This is the same as a single semi-colon except once the program has completed the terminal window remains open until the used presses enter.					
This is the same as a single semi-colon except once the program has completed the terminal window remains open until the used presses enter.	○	○	○	○	○
This is the same as a single semi-colon except once the program has completed the terminal window remains open until the used designing enter. is open .	○	○	○	○	○
This is the same as a hashes open-thread window.	○	○	○	○	○

Page Break

Q10

Question 10

Reference Sentence:~20kb module loader written to work for es6 modules, but that can load amd, commonjs and global scripts detecting the format automatically.

	Strongly Disagree	Disagree	Neutral	Agree	Strongly Agree
The sentence retains all semantics of the reference sentence **Reference Sentence**:~20kb module loader written to work for es6 modules, but that can load amd, commonjs and global scripts detecting the format automatically.					
~20kb module loader written to work for es6 modules, but that can load amd, commonjs and global scripts detecting the format automatically.	○	○	○	○	○
It is compiled against the latest nightlies.	○	○	○	○	○
<url> <url> <url> <url> <url> <url> <url> <url> <url> <url> <url> <url> <url> <url> <url> <url> <url> <url> <url> <url> <url> <url> <url> <url> <url> <url> <code_small> is a booting to make your desktop up the first time.	○	○	○	○	○
~20kb module loader written to work for es6 modules, but that can load amd, commonjs and global scripts detecting the format automatically. commonjs and global scripts using the format automatically. commonjs and global scripts using the format automatically. commonjs .	○	○	○	○	○
Grammar Correctness **Reference Sentence**:~20kb module loader written to work for es6 modules, but that can load amd, commonjs and global scripts detecting the format automatically.					
~20kb module loader written to work for es6 modules, but that can load amd, commonjs and global scripts detecting the format automatically.	○	○	○	○	○
It is compiled against the latest nightlies.	○	○	○	○	○
<url> <url> <url> <url> <url> <url> <url> <url> <url> <url> <url> <url> <url> <url> <url> <url> <url> <url> <url> <url> <url> <url> <url> <url> <url> <url> <code_small> is a booting to make your desktop up the first time.	○	○	○	○	○
~20kb module loader written to work for es6 modules, but that can load amd, commonjs and global scripts detecting the format automatically. commonjs and global scripts using the format automatically. commonjs and global scripts using the format automatically. commonjs .	○	○	○	○	○
Simplicity compared to Reference **Reference Sentence**:~20kb module loader written to work for es6 modules, but that can load amd, commonjs and global scripts detecting the format automatically.					
~20kb module loader written to work for es6 modules, but that can load amd,	○	○	○	○	○

commonjs and global scripts detecting the format automatically.					
It is compiled against the latest nightlies.	○	○	○	○	○
<url> <url> <url> <url> <url> <url> <url> <url> <url> <url> <url> <url> <url> <url> <url> <url> <url> <url> <url> <url> <url> <url> <url> <url> <url> <url> <code_small> is a booting to make your desktop up the first time.	○	○	○	○	○
~20kb module loader written to work for es6 modules, but that can load amd, commonjs and global scripts detecting the format automatically. commonjs and global scripts using the format automatically. commonjs and global scripts using the format automatically. commonjs .	○	○	○	○	○

Page Break

Q11

Do you have any comments on this survey?

Import from library | Add new question

Add Block

End Block

Q12

Thank you for finishing the survey.
Please copy the code "C16J3XKZ (without quotes) for Prolific to claim your completion, and then click "submit".

Import from library | Add new question

Add Block

End of Survey

We thank you for your time spent taking this survey.

Your response has been recorded.