


Task 7.1

Set 1.

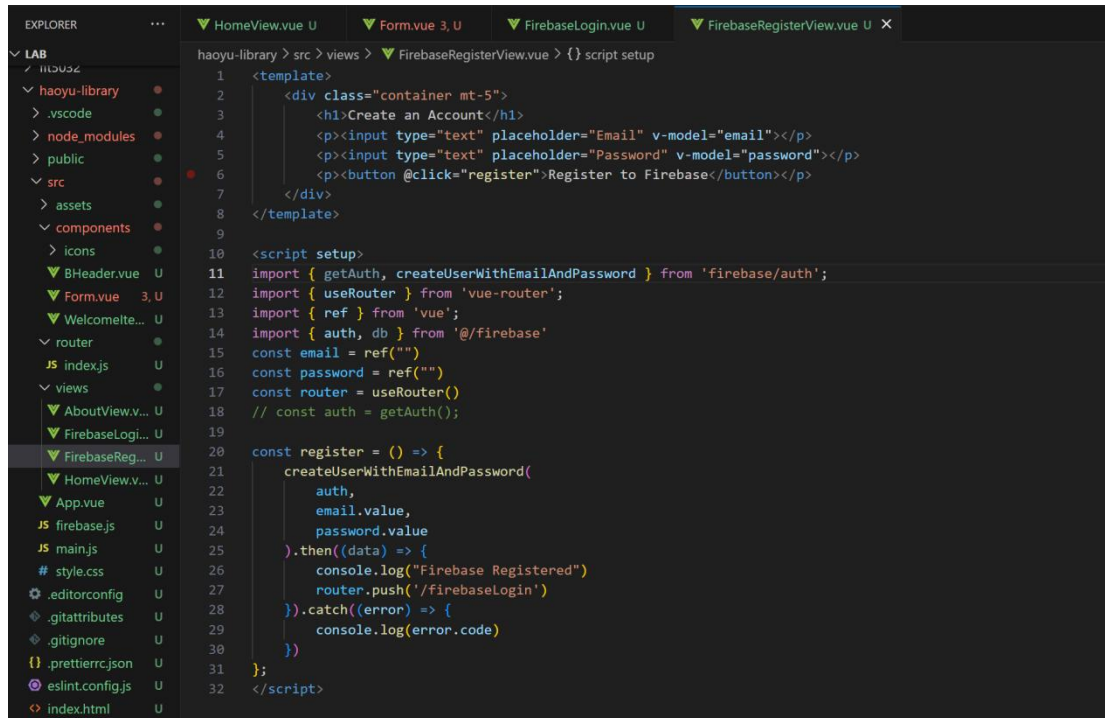

```
1 <template>
2   <div class="container mt-5">
3     <h1>Create an Account</h1>
4     <p><input type="text" placeholder="Email" v-model="email"></p>
5     <p><input type="text" placeholder="Password" v-model="password"></p>
6     <p><button @click="register">Register to Firebase</button></p>
7   </div>
8 </template>
9
10 <script setup>
11 import { getAuth, createUserWithEmailAndPassword } from 'firebase/auth';
12 import { useRouter } from 'vue-router';
13 import { ref } from 'vue';
14 import { auth, db } from '@/firebase'
15 const email = ref("")
16 const password = ref("")
17 const router = useRouter()
18 // const auth = getAuth();
19
20 const register = () => {
21   createUserWithEmailAndPassword(
22     auth,
23     email.value,
24     password.value
25   ).then((data) => {
26     console.log("Firebase Registered")
27     router.push('/firebaseLogin')
28   }).catch((error) => {
29     console.log(error.code)
30   })
31 };
32 </script>
```

[Home](#) [About](#) [Login](#) [register](#)


Create an Account

Email

Password

Register to Firebase

Set 2:

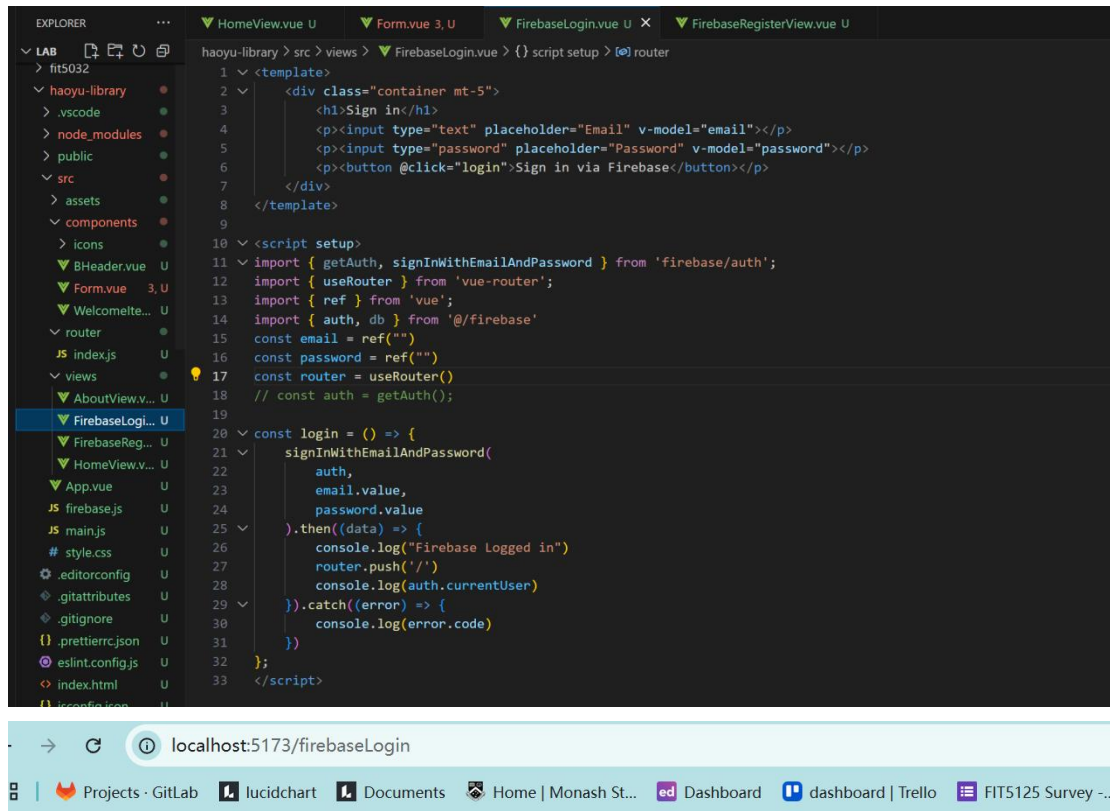

[Home](#) [About](#) [Login](#) [register](#)

Sign in

Set 3:

Task 7.2

Set 1:

[Home](#)[About](#)[Login](#)[register](#)[add book](#)

Create an Account

```
const register = async () => {  
  try {  
    console.log("email: "+email.value)  
    // console.log(password.value)  
    console.log("role: "+role.value)  
    const userCredential = await createUserWithEmailAndPassword(  
      auth,  
      email.value,  
      password.value  
    );  
    console.log(userCredential.user)  
  
    await setDoc(doc(db, 'user_role', userCredential.user.uid), {  
      email: userCredential.user.email,  
      role: role.value  
    })  
    console.log('registered!')  
    router.push('/firebaseLogin')  
  } catch (err) {  
    console.log(err)  
  }  
}
```

```
<template>
  <div class="container mt-5">
    <h1>Create an Account</h1>
    <p><input type="text" placeholder="Email" v-model="email"></p>
    <p><input type="text" placeholder="Password" v-model="password"></p>
    <p>
      <select id="role" v-model="role">
        <option value="Guest">Guest</option>
        <option value="Viewer">Viewer</option>
        <option value="Admin">Admin</option>
      </select>
    </p>
    <p><button @click="register">Register to Firebase</button></p>
  </div>
</template>
```

Set 2:

Log out

email: 123@viewer.com

role: Viewer

Logout

```
const login = async () => {
  try {
    const data = await signInWithEmailAndPassword(
      auth,
      email.value,
      password.value
    )
    console.log("Firebase Logged in")
    console.log(data.user)

    const snap = await getDoc(doc(db, 'user_role', data.user.uid))
    if(snap.exists()){
      console.log('snap')
      console.log(snap.data())

      userStore.setUser(data.user.uid, snap.data().email, snap.data().role)
      router.push('/logout')
    }else{
      console.log('no role')
    }
  } catch (err) {
    console.log(err)
  }
};
</script>
```

```

library > src > store > JS user.js > useUserStore > actions > cleanUser
import { defineStore } from "pinia";

export const useUserStore = defineStore('user', {
  state(){
    return {
      uid: null,
      email: null,
      role: null
    }
  },
  actions: {
    setUser(uid, email, role){
      this.uid = uid
      this.email = email
      this.role = role
    },
    cleanUser(){
      this.uid = null
      this.email = null
      this.role = null
    }
  }
})

```

The screenshot shows a VS Code editor with a project named 'haoyu-library'. The Explorer sidebar on the left shows the file structure, including folders like 'src', 'assets', 'components', 'router', 'store', and 'views'. The 'views' folder is expanded, showing 'LogoutView.vue' selected. The main editor area displays the code for 'LogoutView.vue', which includes a template with a login form and a logout button, and a script setup with imports for Firebase authentication, Vue Router, and the Pinia user store.

```

1 <template>
2   <div class="container mt-5">
3     <h1>Log out</h1>
4     <div>email: {{ email }}</div>
5     <div>role: {{ role }}</div>
6     <button @click="logout">Logout</button>
7   </div>
8 </template>
9
10
11 <script setup>
12   import { getAuth, onAuthStateChanged, signInWithEmailAndPassword } from 'firebase/auth';
13   import { useRouter } from 'vue-router';
14   import { onMounted, ref } from 'vue';
15   import { auth, db } from '@/firebase'
16   import {
17     collection,
18     addDoc,
19     onSnapshot,
20     query,
21     serverTimestamp,
22     where,
23     getDocs,
24     deleteDoc,
25     doc,
26     getDoc,
27   } from 'firebase/firestore';
28   import { useUserStore } from '@/store/user';
29

```

```
11 <script setup>
12
29
30 const router = useRouter()
31 // const auth = getAuth();
32 const userStore = useUserStore()
33 const email = ref(null)
34 const role = ref(null)
35
36 onMounted(() => {
37   email.value = userStore.email
38   role.value = userStore.role
39 })
40
41
42
43 const logout = async () => {
44   try {
45     await auth.signOut()
46     console.log("logout!")
47     userStore.cleanUser()
48     router.replace('/firebaseLogin')
49   } catch (err) {
50     console.log(err)
51   }
52 }
53
54
55
56
57 </script>
```

Store Timeline About Settings

Search s

Pinia (root)

user

Search state...

state

uid : 8CVsq5swvLYtpaBugHZw47Y7V0H3

email : 123@admin.com

role : Admin