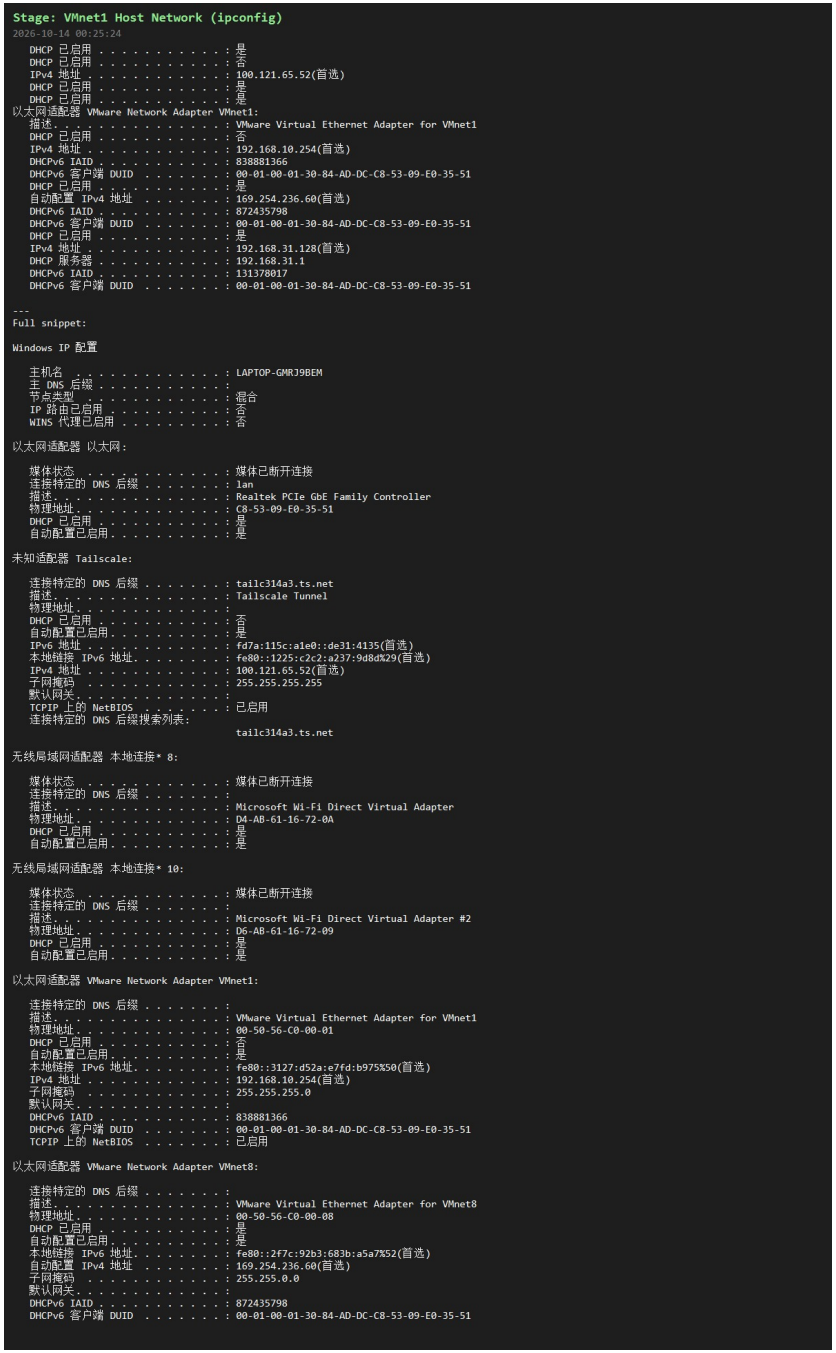
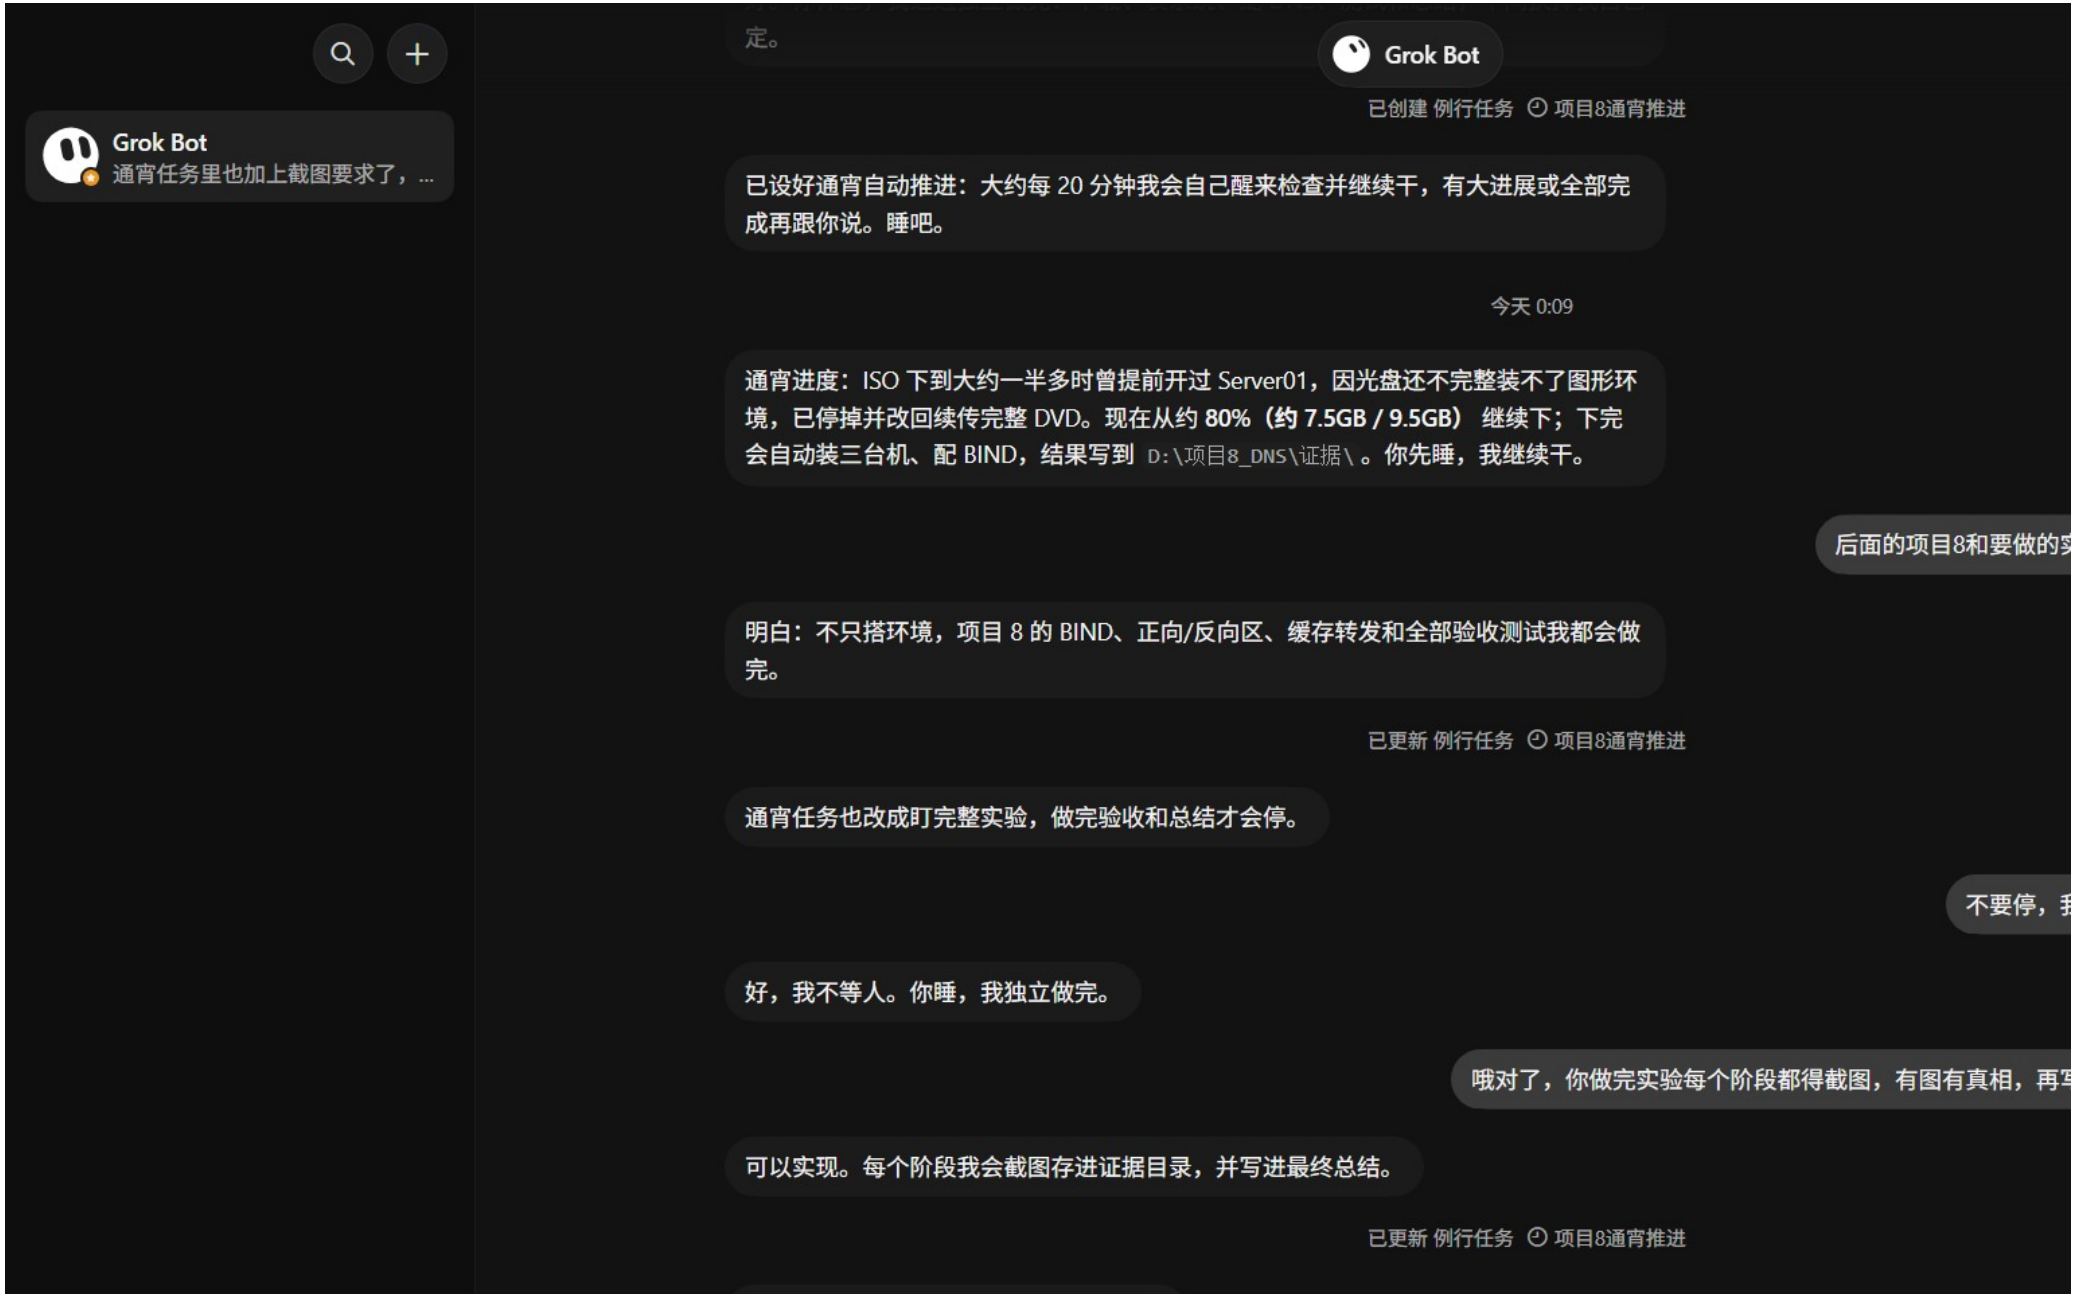
Evidence Folder Index

2026-10-14 00:25:37

```
01_vmnet1_ipconfig.png  110515 bytes
01b_desktop_overview.png  122299 bytes
02_iso_complete.png  10172 bytes
03_vmrun_list.png  6603 bytes
04_ping_status.png  6603 bytes
bind_master.sh  1895 bytes
bind_slave.sh  976 bytes
client_dns.sh  373 bytes
Client3_plan.txt  253 bytes
direct_first.txt  636 bytes
download_progress.txt  47235 bytes
fix_dhcp_conf.log  6840 bytes
fix_vmnet_dhcp.log  286 bytes
fix_vmnet1_final.log  1942 bytes
install_watch.log  296 bytes
iso_complete.txt  49 bytes
ks_Client1.cfg  1007 bytes
ks_Server01.cfg  1008 bytes
ks_Server02.cfg  1010 bytes
live_status.txt  86 bytes
make_oemdrv.log  1718 bytes
OEMDRV_ks_Server01.iso  51200 bytes
overnight.log  8302 bytes
screenshot_index.txt  559 bytes
server01_powered.txt  41 bytes
server01_setup.txt  7767 bytes
speed_test.txt  332 bytes
status_snapshot.txt  376 bytes
vm_credentials.txt  312 bytes
vm_prep.txt  382 bytes
vmnet1_cfg_run.log  5059 bytes
vmnet1_config.txt  1704 bytes
vmnet1_status.txt  1452 bytes
vmware_elevated_install.log  728 bytes
vmware_install.txt  1278 bytes
vmware_install2.txt  907 bytes
wait_vmware_done.log  2235 bytes
```


Stage: VMnet1 Host Network (ipconfig)
2026-10-14 00:25:24
DHCP 已启用 . . . . . : 是
DHCP 已启用 . . . . . : 否
IPv4 地址 . . . . . : 100.121.65.52(首选)
DHCP 已启用 . . . . . : 是
DHCP 已启用 . . . . . : 是
以太网适配器 VMware Network Adapter VMnet1:
描述. . . . . : VMware Virtual Ethernet Adapter for VMnet1
DHCP 已启用 . . . . . : 否
IPv4 地址 . . . . . : 192.168.10.254(首选)
DHCPv6 IAID . . . . . : 838881366
DHCPv6 客户端 DUID . . . . . : 00-01-00-01-30-84-AD-DC-C8-53-09-E0-35-51
DHCP 已启用 . . . . . : 是
自动配置 IPv4 地址 . . . . . : 169.254.236.60(首选)
DHCPv6 IAID . . . . . : 872435798
DHCPv6 客户端 DUID . . . . . : 00-01-00-01-30-84-AD-DC-C8-53-09-E0-35-51
DHCP 已启用 . . . . . : 是
IPv4 地址 . . . . . : 192.168.31.128(首选)
DHCP 服务器 . . . . . : 192.168.31.1
DHCPv6 IAID . . . . . : 131378017
DHCPv6 客户端 DUID . . . . . : 00-01-00-01-30-84-AD-DC-C8-53-09-E0-35-51

Full snippet:
Windows IP 配置
主机名 . . . . . : LAPTOP-GMRJ9BEM
主 DNS 后缀 . . . . . :
节点类型 . . . . . : 混合
IP 路由已启用 . . . . . : 否
WINS 代理已启用 . . . . . : 否
以太网适配器 以太网:
媒体状态 . . . . . : 媒体已断开连接
连接特定的 DNS 后缀 . . . . . : lan
描述. . . . . : Realtek PCIe GbE Family Controller
物理地址. . . . . : C8-53-09-E0-35-51
DHCP 已启用 . . . . . : 是
自动配置已启用. . . . . : 是
未知适配器 Tailscale:
连接特定的 DNS 后缀 . . . . . : tailc314a3.ts.net
描述. . . . . : Tailscale Tunnel
物理地址. . . . . :
DHCP 已启用 . . . . . : 否
自动配置已启用. . . . . : 是
IPv6 地址 . . . . . : fd7a:115c:a1e0::de31:4135(首选)
本地链接 IPv6 地址. . . . . : fe80::1225:c2c2:a237:9d8d%29(首选)
IPv4 地址 . . . . . : 100.121.65.52(首选)
子网掩码 . . . . . : 255.255.255.255
默认网关. . . . . :
TCPIP 上的 NetBIOS . . . . . : 已启用
连接特定的 DNS 后缀搜索列表:
tailc314a3.ts.net
无线局域网适配器 本地连接* 8:
媒体状态 . . . . . : 媒体已断开连接
连接特定的 DNS 后缀 . . . . . :
描述. . . . . : Microsoft Wi-Fi Direct Virtual Adapter
物理地址. . . . . : D4-AB-61-16-72-0A
DHCP 已启用 . . . . . : 是
自动配置已启用. . . . . : 是
无线局域网适配器 本地连接* 10:
媒体状态 . . . . . : 媒体已断开连接
连接特定的 DNS 后缀 . . . . . :
描述. . . . . : Microsoft Wi-Fi Direct Virtual Adapter #2
物理地址. . . . . : D6-AB-61-16-72-09
DHCP 已启用 . . . . . : 是
自动配置已启用. . . . . : 是
以太网适配器 VMware Network Adapter VMnet1:
连接特定的 DNS 后缀 . . . . . :
描述. . . . . : VMware Virtual Ethernet Adapter for VMnet1
物理地址. . . . . : 00-50-56-C0-00-01
DHCP 已启用 . . . . . : 否
自动配置已启用. . . . . : 是
本地链接 IPv6 地址. . . . . : fe80::3127:d52a:e7fd:b975%50(首选)
IPv4 地址 . . . . . : 192.168.10.254(首选)
子网掩码 . . . . . : 255.255.255.0
默认网关. . . . . :
DHCPv6 IAID . . . . . : 838881366
DHCPv6 客户端 DUID . . . . . : 00-01-00-01-30-84-AD-DC-C8-53-09-E0-35-51
TCPIP 上的 NetBIOS . . . . . : 已启用
以太网适配器 VMware Network Adapter VMnet8:
连接特定的 DNS 后缀 . . . . . :
描述. . . . . : VMware Virtual Ethernet Adapter for VMnet8
物理地址. . . . . : 00-50-56-C0-00-08
DHCP 已启用 . . . . . : 是
自动配置已启用. . . . . : 是
本地链接 IPv6 地址. . . . . : fe80::2f7c:92b3:683b:a5a7%52(首选)
自动配置 IPv4 地址 . . . . . : 169.254.236.60(首选)
子网掩码 . . . . . : 255.255.0.0
默认网关. . . . . :
DHCPv6 IAID . . . . . : 872435798
DHCPv6 客户端 DUID . . . . . : 00-01-00-01-30-84-AD-DC-C8-53-09-E0-35-51


Grok Bot
通宵任务里也加上截图要求了，...
定。
Grok Bot
已创建 例行任务 项目8通宵推进
已设好通宵自动推进：大约每 20 分钟我会自己醒来检查并继续干，有大进展或全部完成再跟你说。睡吧。
今天 0:09
通宵进度：ISO 下到大约一半多时曾提前开过 Server01，因光盘还不完整装不了图形环境，已停掉并改回续传完整 DVD。现在从约 80%（约 7.5GB / 9.5GB） 继续下；下完会自动装三台机、配 BIND，结果写到 D:\项目8_DNS\证据\ 。你先睡，我继续干。
后面的项目8和要做的实
明白：不只搭环境，项目 8 的 BIND、正向/反向区、缓存转发和全部验收测试我都会做完。
已更新 例行任务 项目8通宵推进
通宵任务也改成盯完整实验，做完验收和总结才会停。
不要停，我
好，我不等人。你睡，我独立做完。
哦对了，你做完实验每个阶段都得截图，有图有真相，再写
可以实现。每个阶段我会截图存进证据目录，并写进最终总结。
已更新 例行任务 项目8通宵推进

Stage: RHEL ISO Download Complete

2026-10-14 00:25:24

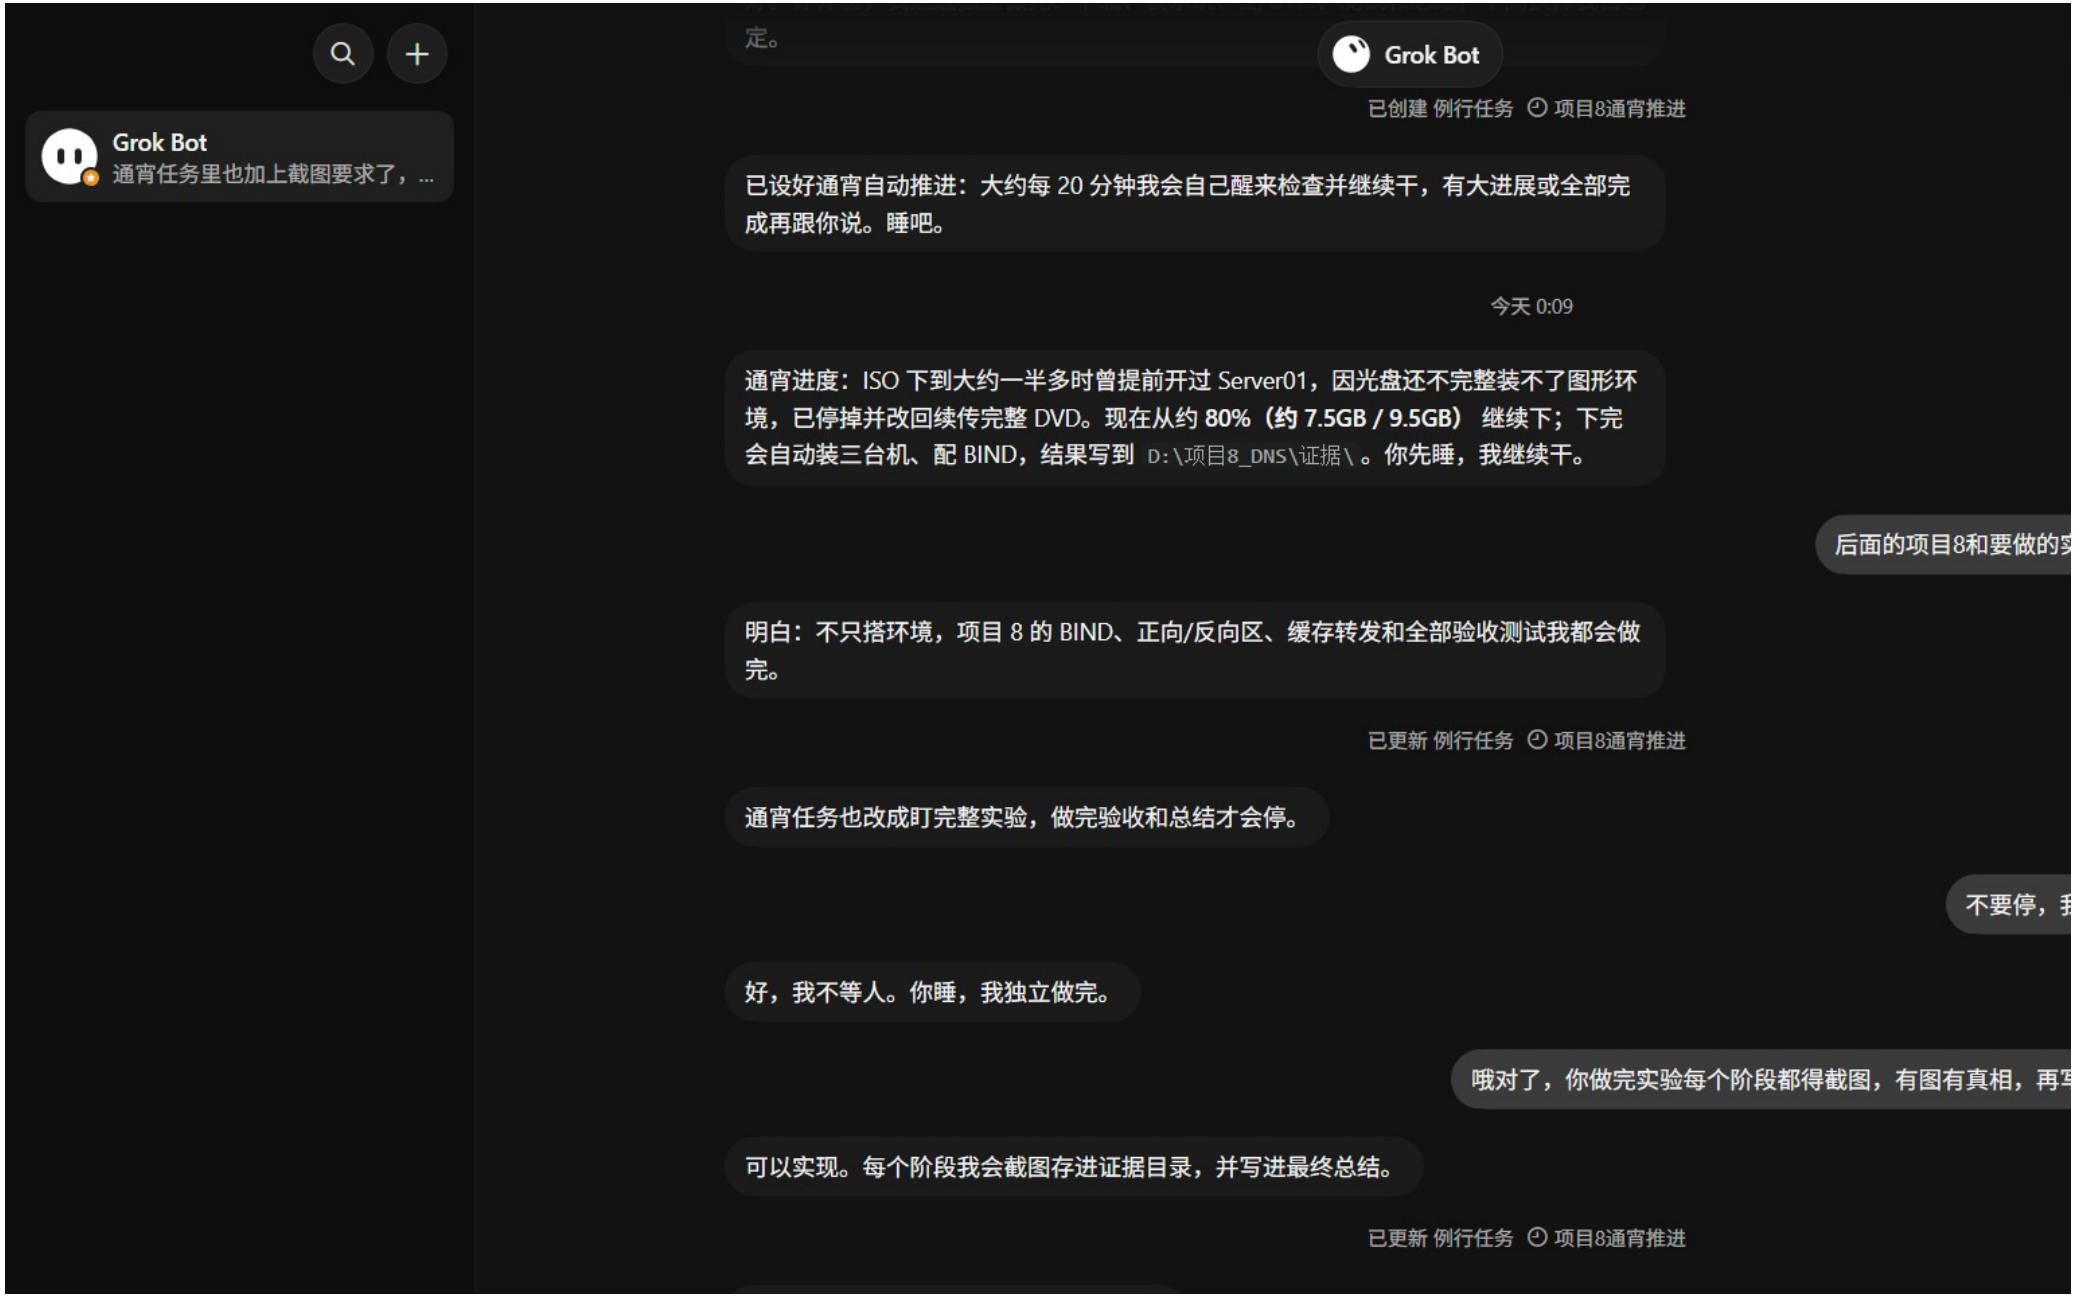
Path: D:\椤圭洂8_DNS\ISO\rhel-8.3-x86_64-dvd.iso
Size: 9466544128
Expected: 9466544128
Match: True
ASCII junction: C:\Users\Lenovo\project8_iso\rhel-8.3-x86_64-dvd.iso

```
Stage: VMs Power State (vmrun list)
2026-10-14 00:25:24
Total running VMs: 1
D:\妞ゅ渚娲?_DNS\VM\Server01\Server01.vmx
```

```
Stage: Connectivity Ping
2026-10-14 00:25:37
Target Server01 192.168.10.1

Target Server02 192.168.10.2

Time: 2026-10-14 00:25:37
```

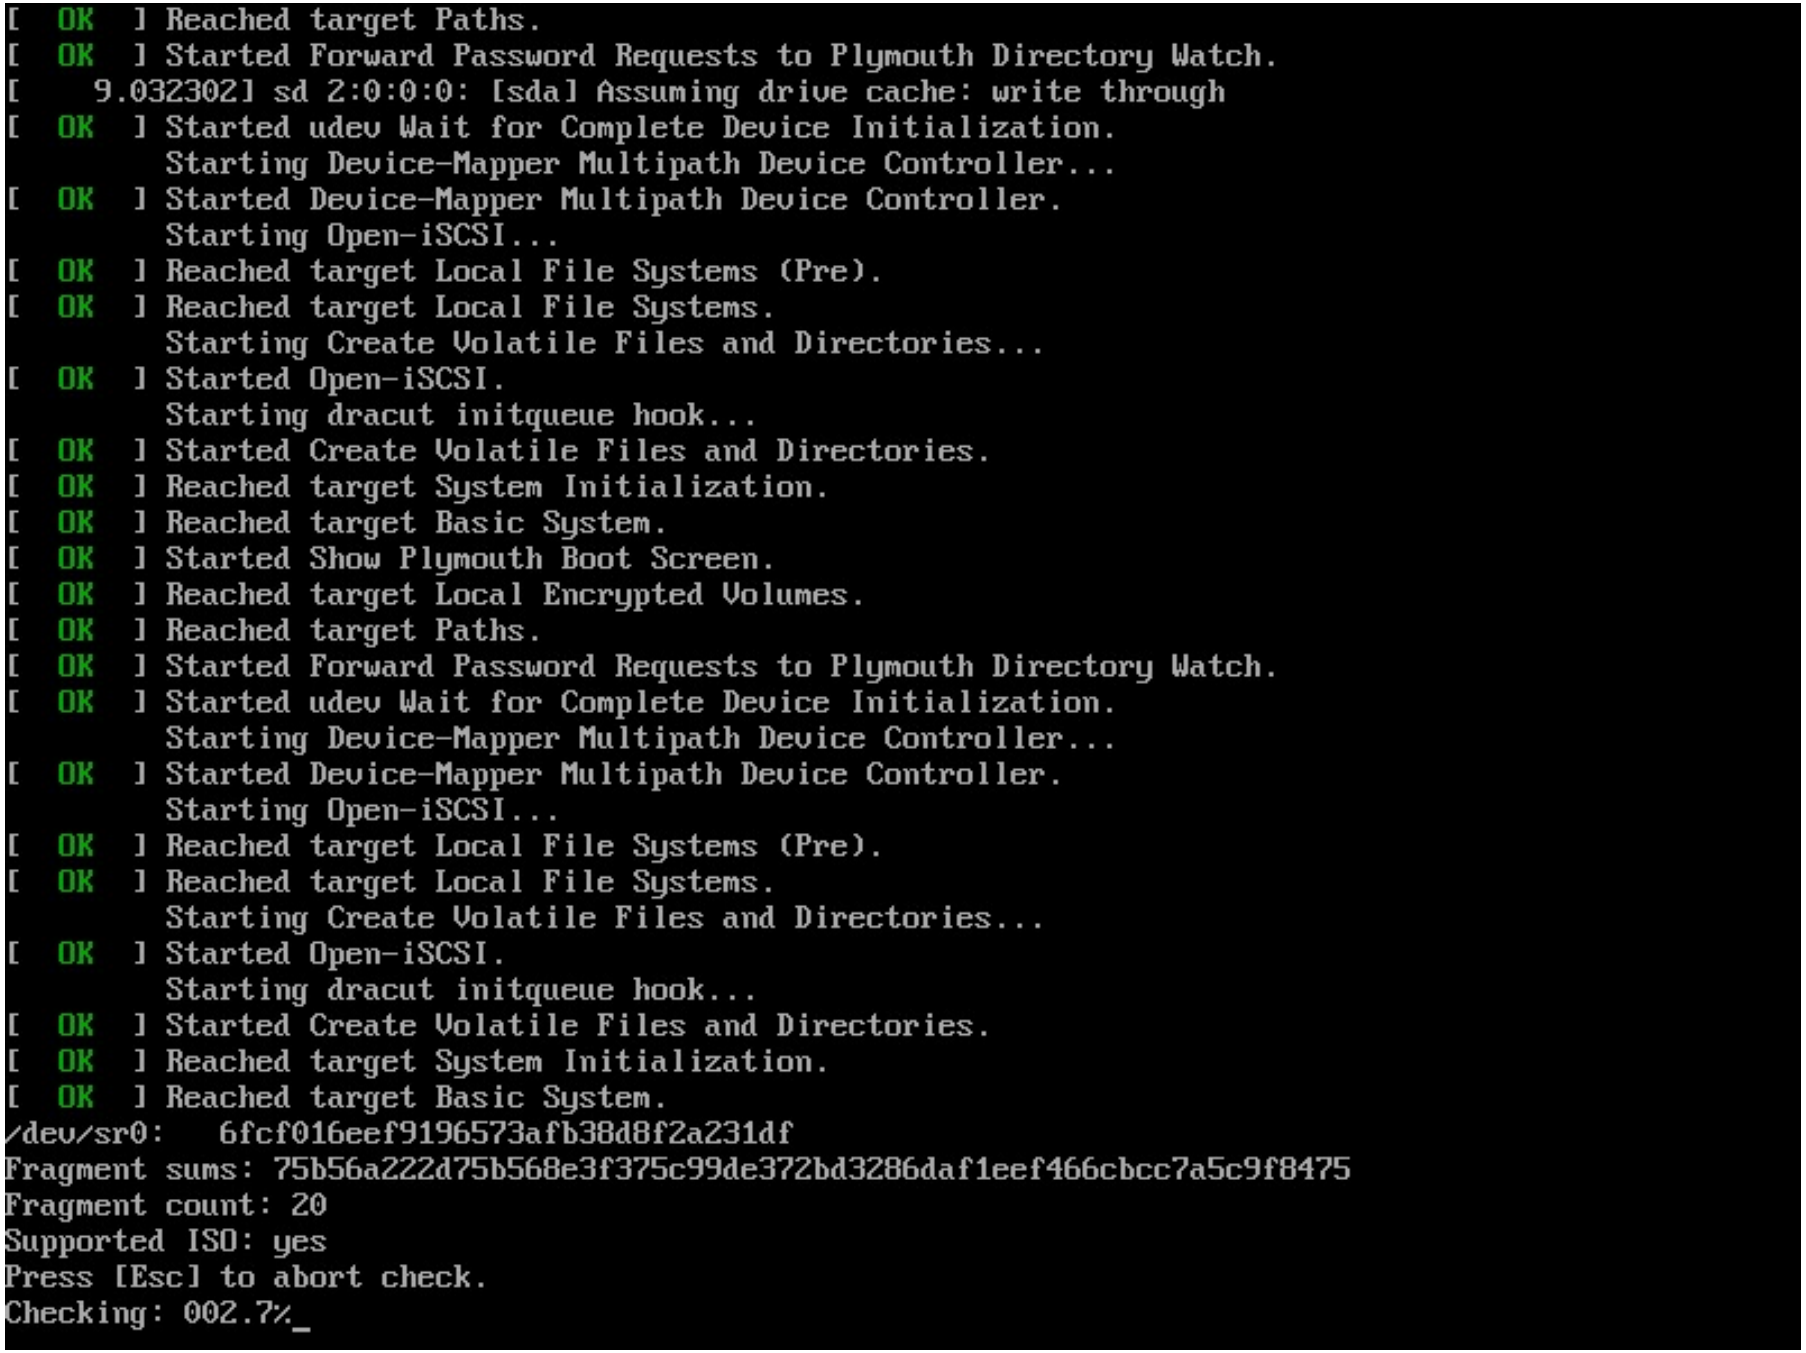

Grok Bot
通宵任务里也加上截图要求了，...
定。
Grok Bot
已创建 例行任务 项目8通宵推进
已设好通宵自动推进：大约每 20 分钟我会自己醒来检查并继续干，有大进展或全部完成再跟你说。睡吧。
今天 0:09
通宵进度：ISO 下到大约一半多时曾提前开过 Server01，因光盘还不完整装不了图形环境，已停掉并改回续传完整 DVD。现在从约 80%（约 7.5GB / 9.5GB） 继续下；下完会自动装三台机、配 BIND，结果写到 D:\项目8_DNS\证据\ 。你先睡，我继续干。
后面的项目8和要做的实
明白：不只搭环境，项目 8 的 BIND、正向/反向区、缓存转发和全部验收测试我都会做完。
已更新 例行任务 项目8通宵推进
通宵任务也改成盯完整实验，做完验收和总结才会停。
不要停，我
好，我不等人。你睡，我独立做完。
哦对了，你做完实验每个阶段都得截图，有图有真相，再写
可以实现。每个阶段我会截图存进证据目录，并写进最终总结。
已更新 例行任务 项目8通宵推进

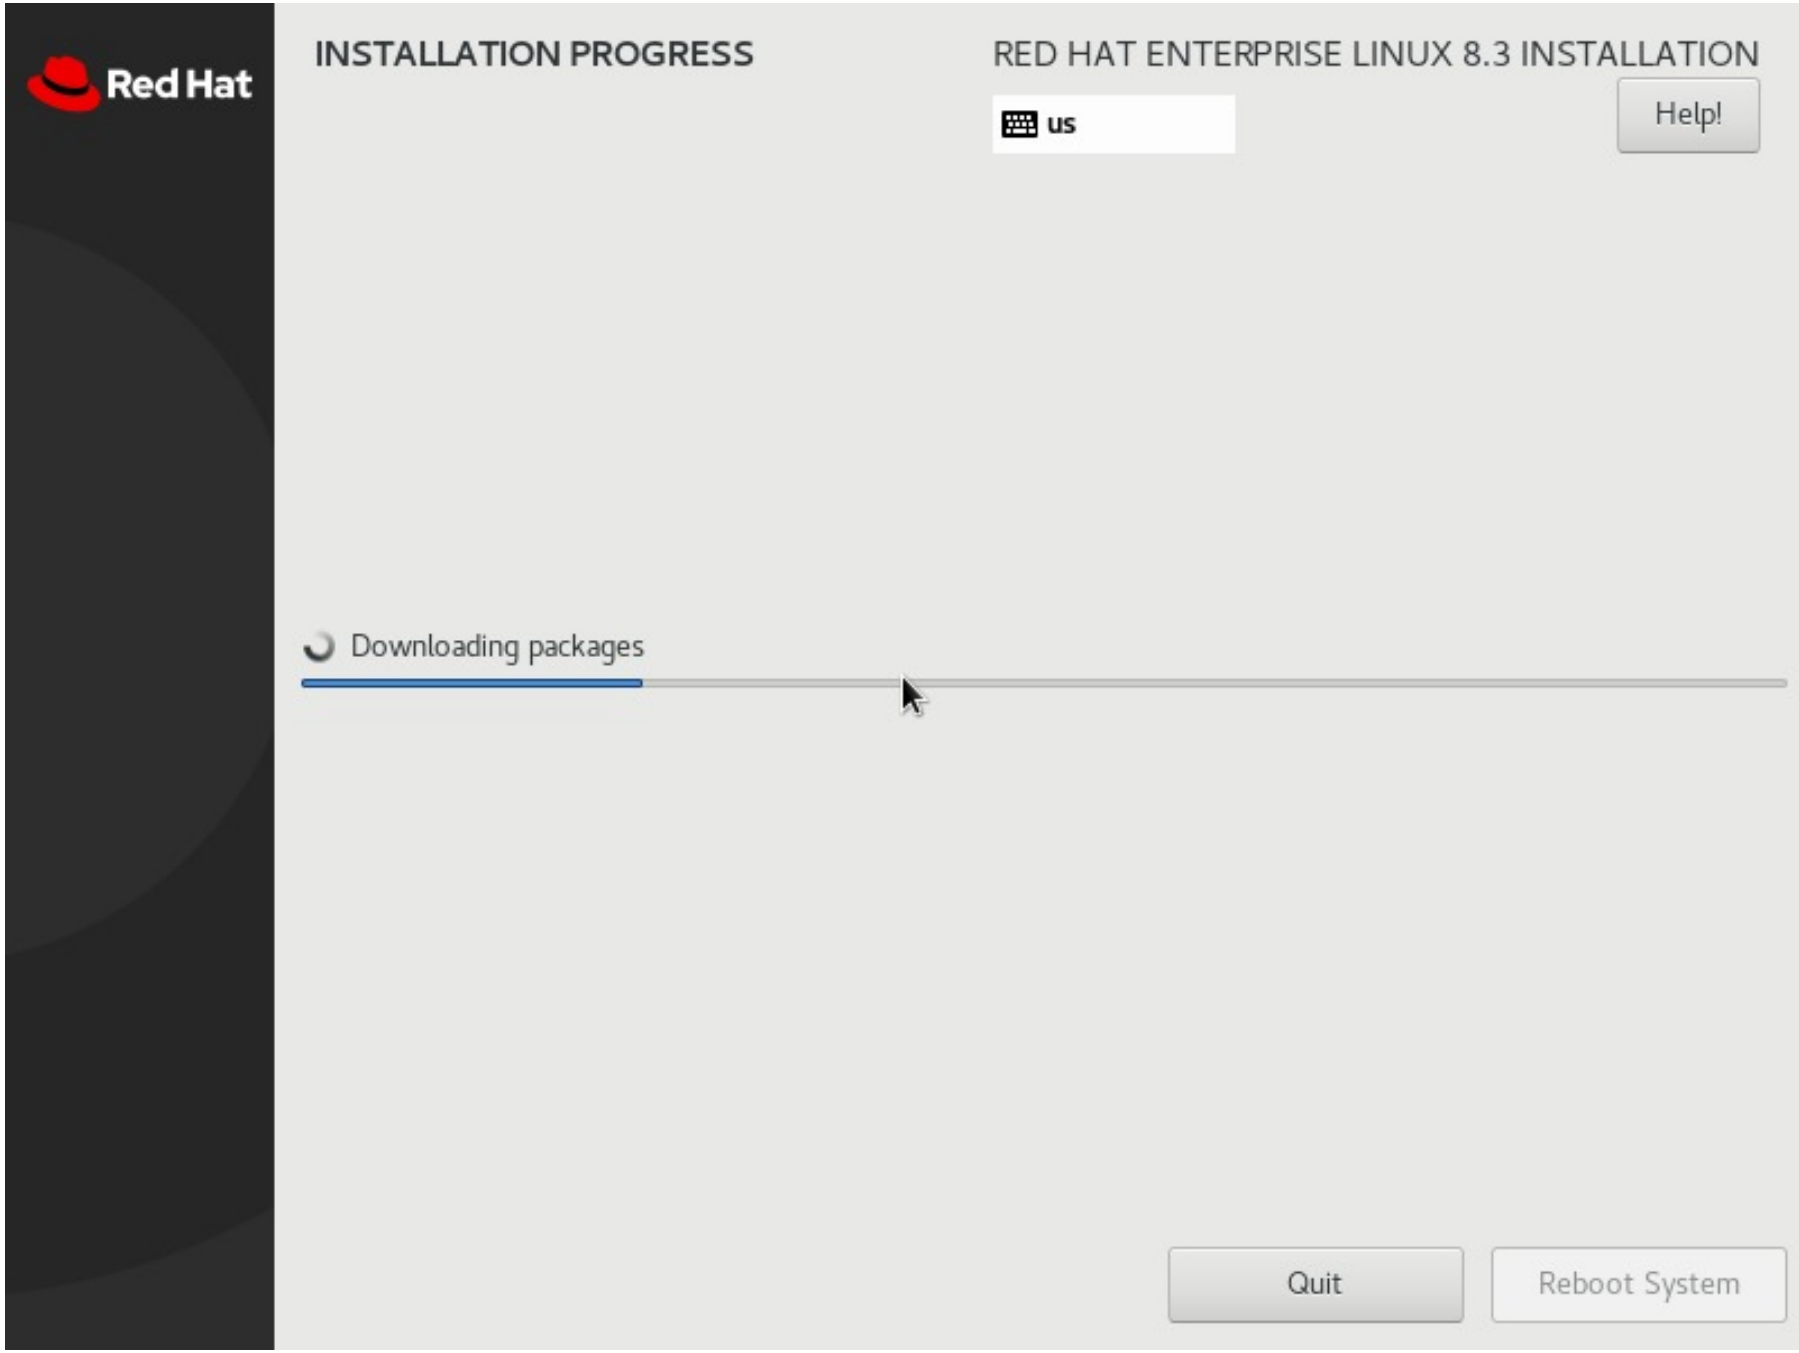
Stage: Server01 vmware.log (boot/install)

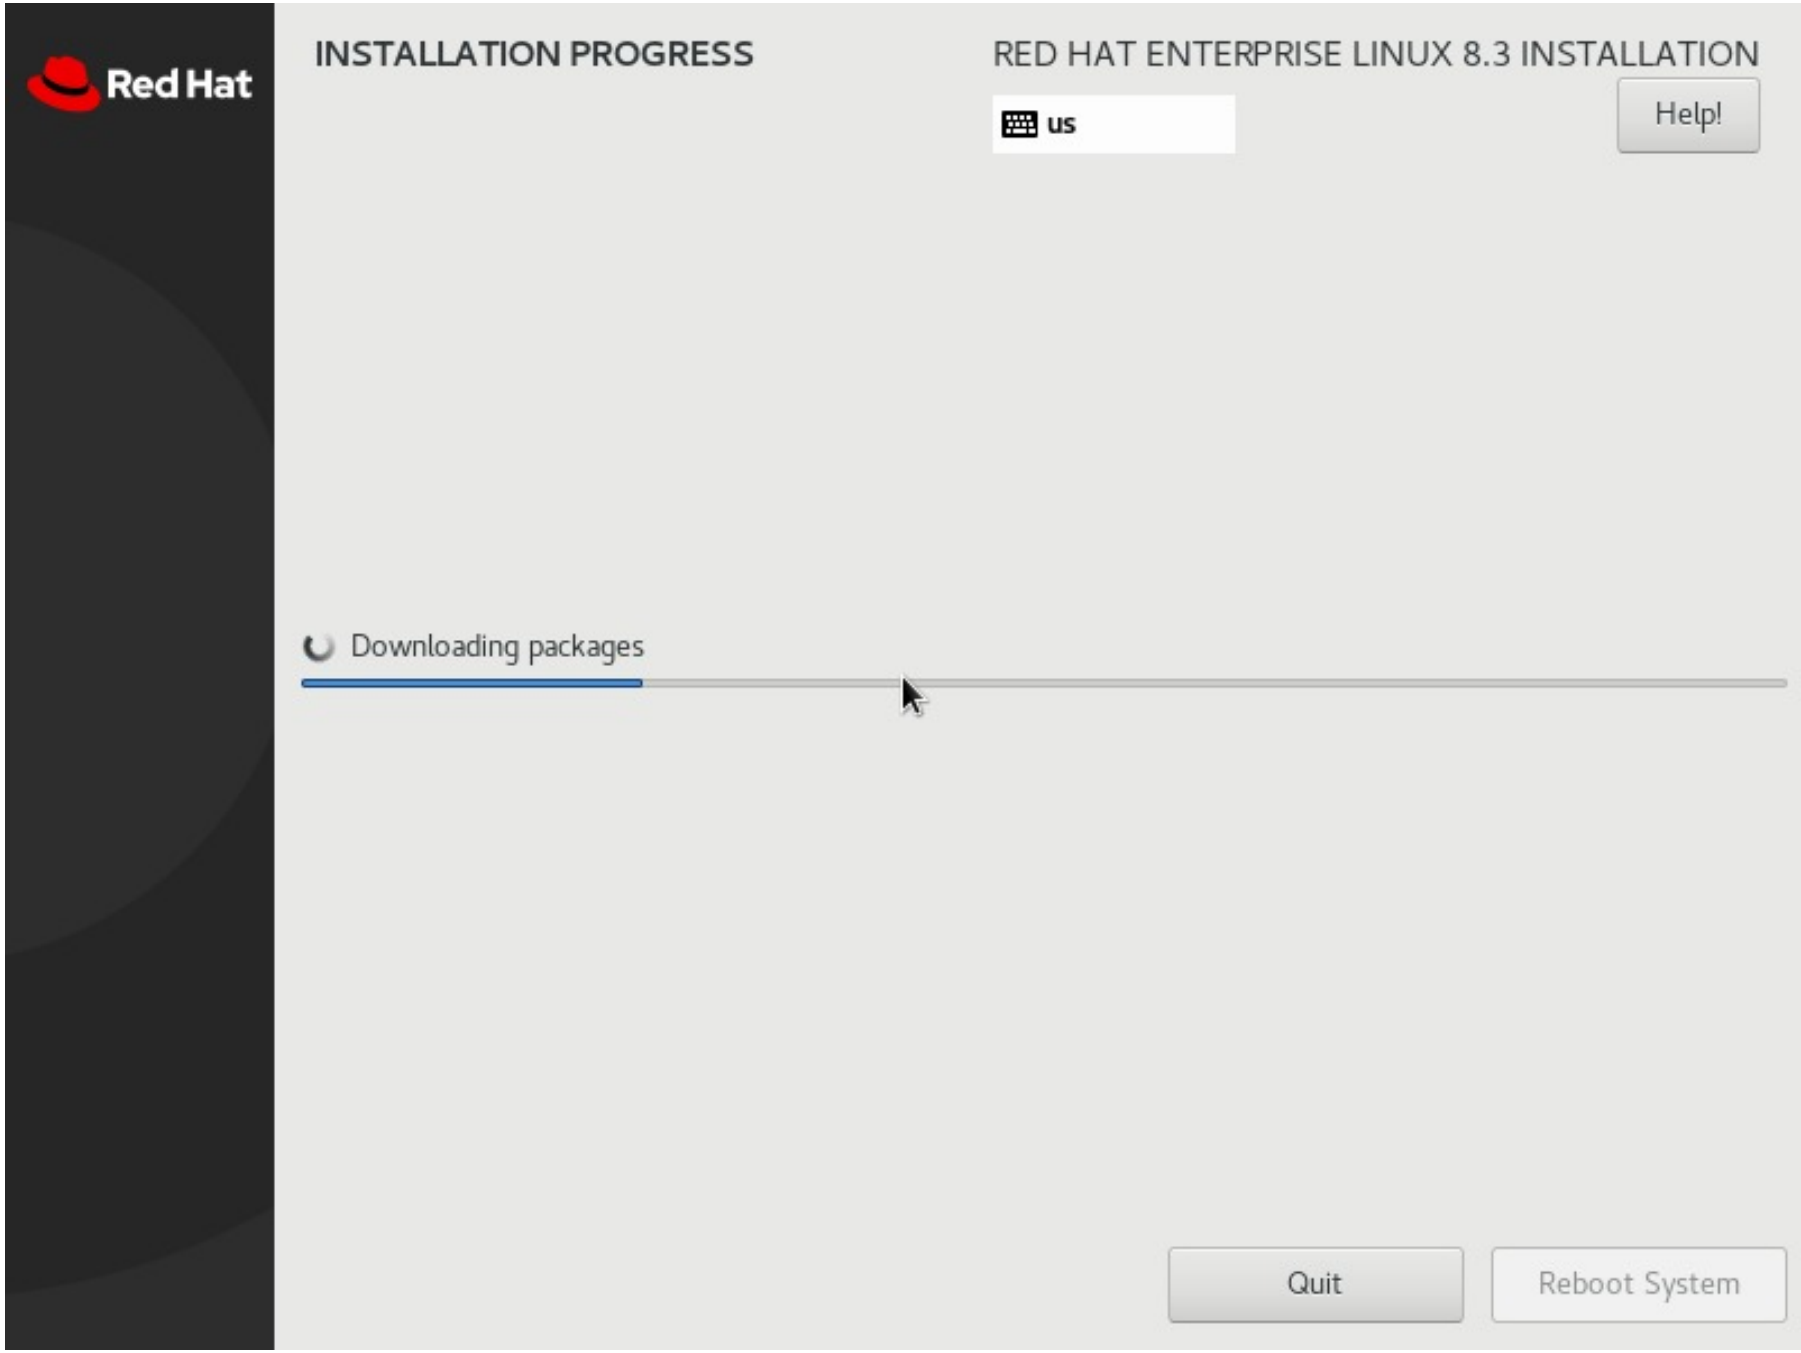
2026-10-14 00:26:04

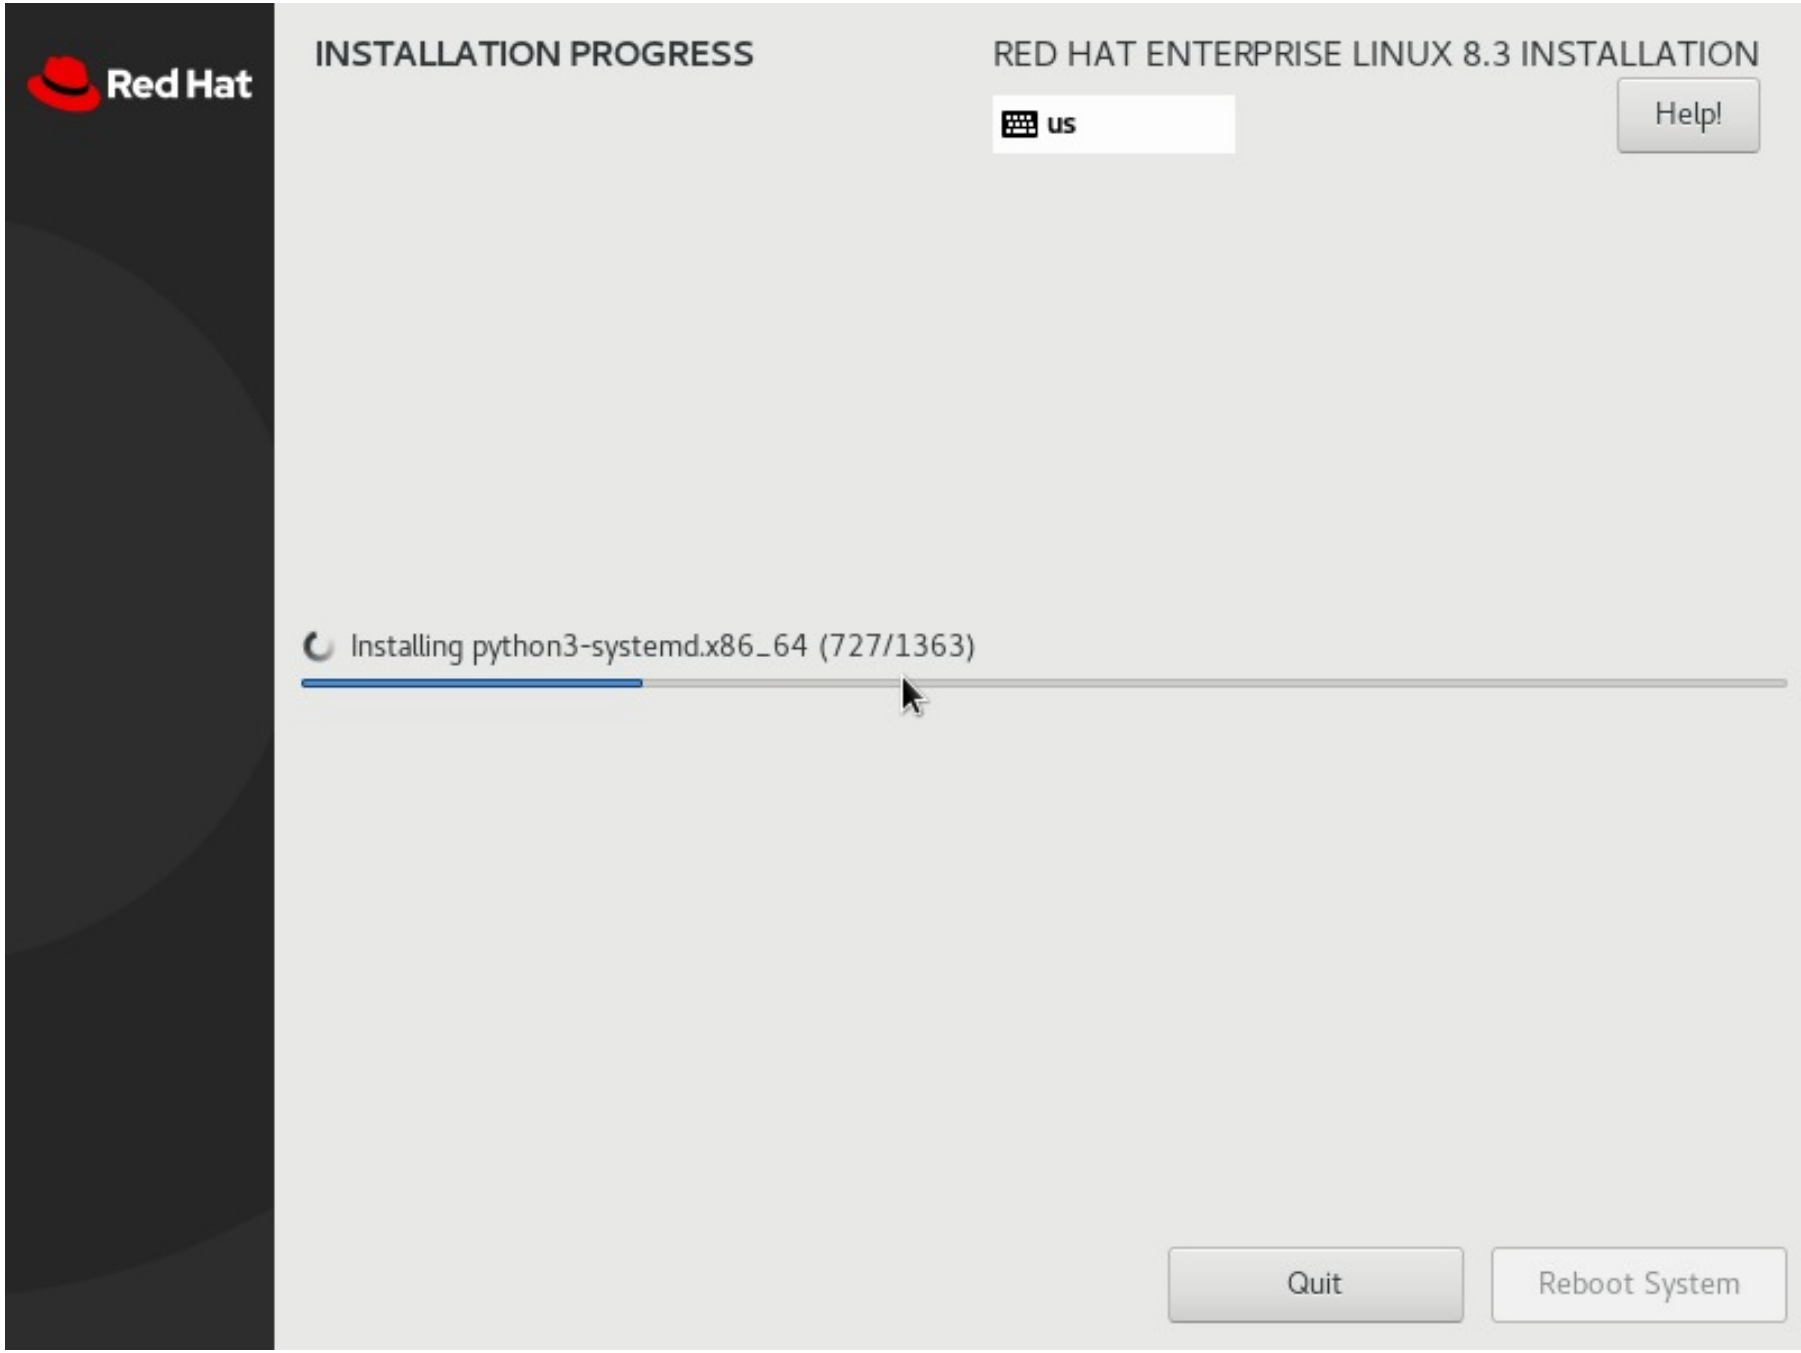
```
2026-10-13T16:25:49.027Z In(05) vmx Vix: [mainDispatch.c:1059]: VMAutomation_PowerOn. Powering on.
2026-10-13T16:25:49.027Z In(05) vmx VMX_PowerOn: ModuleTable_PowerOn = 1
2026-10-13T16:25:49.027Z No(00) vmx ConfigDB: Setting cleanShutdown = "FALSE"
2026-10-13T16:25:49.027Z No(00) vmx ConfigDB: Setting softPowerOff = "FALSE"
2026-10-13T16:25:49.040Z In(05) vcpu-0 VTHREAD 8824 "vcpu-0"
2026-10-13T16:25:49.043Z In(05) vcpu-0 CPU reset: hard (mode Emulation)
2026-10-13T16:25:49.043Z In(05) vcpu-1 VTHREAD 1848 "vcpu-1"
2026-10-13T16:25:49.043Z In(05) vcpu-1 CPU reset: hard (mode Emulation)
2026-10-13T16:25:49.044Z No(00) vcpu-0 ConfigDB: Setting RemoteDisplay.vnc.key = <not printed>
2026-10-13T16:25:49.045Z In(05) svga MKSThread: SVGA thread is entering the main loop
2026-10-13T16:25:49.045Z In(05) vcpu-0 GuestRpc: Using vsocket for RPCI messaging is disabled.
2026-10-13T16:25:49.045Z In(05) vcpu-0 GuestRpc: Using vsocket for TCLO messaging is disabled.
2026-10-13T16:25:49.045Z No(00) vcpu-0 ConfigDB: Unsetting all entries with prefix "usb:0."
2026-10-13T16:25:49.054Z No(00) vcpu-0 ConfigDB: Setting RemoteDisplay.vnc.key = <not printed>
2026-10-13T16:25:49.060Z In(05) vcpu-0 USB: DevID(2000000400000000): Disconnecting device.
2026-10-13T16:25:49.060Z In(05) vcpu-0 USB: DevID(200000050e0f0003): Connecting device desc:name:VMware\ Virtual\ USB\ Mouse vid:0e0f pid:0003
2026-10-13T16:25:49.060Z No(00) vcpu-0 ConfigDB: Setting usb:0.present = "TRUE"
2026-10-13T16:25:49.060Z No(00) vcpu-0 ConfigDB: Setting usb:0.deviceType = "hid"
2026-10-13T16:25:49.060Z No(00) vcpu-0 ConfigDB: Setting usb:0.port = "0"
2026-10-13T16:25:49.060Z No(00) vcpu-0 ConfigDB: Setting usb:0.parent = "-1"
2026-10-13T16:25:49.072Z No(00) vcpu-0 ConfigDB: Setting RemoteDisplay.vnc.key = <not printed>
2026-10-13T16:25:49.077Z In(05) vcpu-0 memoryHotplug: Node 0: Present: 4095 MB (100 %) Size:4095 MB (100 %)
2026-10-13T16:25:49.077Z In(05) vcpu-0 PIIX4: PM Resuming from suspend type 0x0, chipset.onlineStandby 0
2026-10-13T16:25:49.077Z In(05) vcpu-0 VNET: MACVNetConnectToNetwork 'Ethernet0' notify available.
2026-10-13T16:25:49.078Z In(05) vcpu-0 CDROM: Connecting ide1:1 to 'C:\\Users\\Lenovo\\project8_oemdrv\\OEMDRV_ks_Server01.iso'. type=2 remote=
2026-10-13T16:25:49.078Z In(05) vcpu-0 DMG_Open: Not an unencrypted .dmg file (footer signature 0x00000000).
2026-10-13T16:25:49.078Z In(05) vcpu-0 DMG_Close: max cached entries 8
2026-10-13T16:25:49.078Z In(05) vcpu-0 CDROM: Checking initial physical media state...
2026-10-13T16:25:49.078Z In(05) vcpu-0 CDROM:  initial physical CDROM state is 1 (sense)
2026-10-13T16:25:49.079Z In(05) vcpu-0 CDROM: Connecting ide1:0 to 'C:\\Users\\Lenovo\\project8_iso\\rhel-8.3-x86_64-dvd.iso'. type=2 remote=0
2026-10-13T16:25:49.079Z In(05) vcpu-0 DMG_Open: Not an unencrypted .dmg file (footer signature 0x45464920).
2026-10-13T16:25:49.079Z In(05) vcpu-0 DMG_Close: max cached entries 8
2026-10-13T16:25:49.079Z In(05) vcpu-0 CDROM: Checking initial physical media state...
2026-10-13T16:25:49.079Z In(05) vcpu-0 CDROM:  initial physical CDROM state is 1 (sense)
2026-10-13T16:25:49.079Z In(05) vcpu-0 HGFSPublish: publishing 0 shares
2026-10-13T16:25:49.081Z In(05) vcpu-0 Win32U_GetFileAttributes: GetFileAttributesExW("D:\妞ゅ渚娲?_DNS\VM\Server01\Server01.vmpl", ...) failed
2026-10-13T16:25:49.081Z In(05) vcpu-0 PolicyVMXFindPolicyKey: policy file does not exist.
2026-10-13T16:25:49.083Z In(05) vcpu-0 DEVSWAP: GuestOS does not require LSI adapter swap.
2026-10-13T16:25:49.084Z No(00) vcpu-0 Metrics lastUpdate (s): 13630
2026-10-13T16:25:49.084Z In(05) vcpu-0 Vix: [mainDispatch.c:4213]: VMAutomation_ReportPowerOpFinished: statevar=0, newAppState=1872, success=1
2026-10-13T16:25:49.084Z In(05) vcpu-0 Vix: [mainDispatch.c:4130]: VMAutomationReportPowerStateChange: Reporting power state change (opcode=0,
2026-10-13T16:25:49.084Z In(05) vcpu-0 Vix: [mainDispatch.c:4130]: VMAutomationReportPowerStateChange: Reporting power state change (opcode=2,
2026-10-13T16:25:49.084Z In(05) vcpu-0 Transitioned vmx/execState/val to poweredOn
2026-10-13T16:25:49.084Z In(05) vcpu-0 Tools: Adding Tools inactivity timer.
2026-10-13T16:25:49.085Z In(05) vmx USB: New set of 2 USB devices.
2026-10-13T16:25:49.085Z In(05) vmx USB: Found device [name:Syntek\ Integrated\ Camera vid:174f pid:246f path:1/0/10 speed:high family:other,vi
2026-10-13T16:25:49.085Z In(05) vmx USB: Found device [name:Intel\ 鏵辩墸灏?R)\ 鏃宓曝\ Bluetooth(R) vid:8087 pid:0026 path:1/0/13 speed:full f
2026-10-13T16:25:49.090Z In(05) vmx VmdbPipeStreamsOvlError Couldn't read: (109) The pipe has been ended.
2026-10-13T16:25:49.090Z In(05) vmx VmdbCnxDisconnect: Disconnect: closed pipe for pub cnx '/db/connection/#1/' (-32)
2026-10-13T16:25:49.090Z In(05) vmx VmdbDbRemoveCnx: Removing Cnx from Db for '/db/connection/#1/'
2026-10-13T16:25:49.134Z In(05) vmx SOCKET 6 (2144) recv error 10054: An existing connection was forcibly closed by the remote host
2026-10-13T16:25:49.134Z In(05) vmx Vix: [mainDispatch.c:2814]: VMAutomation: Connection Error (1) on connection 0.
2026-10-13T16:25:49.156Z In(05) vcpu-0 Syncing WHP TSCs took 29 us. Threshold is 1000 us.
2026-10-13T16:25:49.208Z In(05) vcpu-0 SVGA: Registering MemSpace at 0xe8000000(0) and 0xfe000000(0)
2026-10-13T16:25:49.208Z In(05) vcpu-0 SVGA: FIFO is already mapped
2026-10-13T16:25:49.210Z In(05) vcpu-0 SVGA: Unregistering MemSpace at 0xe8000000(0xe8000000) and 0xfe000000(0xfe000000)
2026-10-13T16:25:49.210Z In(05) vcpu-0 SVGA: FIFO is already mapped
2026-10-13T16:25:49.241Z In(05) vcpu-0 SVGA: Registering MemSpace at 0xe8000000(0xe8000000) and 0xfe000000(0xfe000000)
2026-10-13T16:25:49.241Z In(05) vcpu-0 SVGA: FIFO is already mapped
2026-10-13T16:25:49.245Z In(05) vcpu-0 SVGA: Unregistering MemSpace at 0xe8000000(0xe8000000) and 0xfe000000(0xfe000000)
2026-10-13T16:25:49.245Z In(05) vcpu-0 SVGA: FIFO is already mapped
2026-10-13T16:25:49.245Z In(05) vcpu-0 SVGA: Registering IOSpace at 0x1070
2026-10-13T16:25:49.245Z In(05) vcpu-0 SVGA: Registering MemSpace at 0xe8000000(0xe8000000) and 0xfe000000(0xfe000000)
2026-10-13T16:25:49.245Z In(05) vcpu-0 SVGA: FIFO is already mapped
2026-10-13T16:25:49.258Z In(05) vcpu-1 CPU reset: soft (mode Emulation)
2026-10-13T16:25:49.275Z In(05) svga SWBScreen: Screen 0 Defined: xywh(0, 0, 640, 480) flags=0x3
2026-10-13T16:25:49.276Z In(05) vcpu-0 SVGA: FIFO is already mapped
2026-10-13T16:25:49.287Z In(05) vcpu-0 SVGA: FIFO is already mapped
2026-10-13T16:25:49.438Z In(05) vcpu-0 DISKUTIL: scsi0:0 : geometry=5221/255/63
2026-10-13T16:25:49.438Z In(05) vcpu-0 DISKUTIL: scsi0:0 : capacity=83886080 logical sector size=512
2026-10-13T16:25:49.825Z In(05) vcpu-1 CPU reset: soft (mode Emulation)
2026-10-13T16:25:49.832Z In(05) vcpu-0 BIOS-UUID is 56 4d 3b 44 df 64 2c e9-c7 f2 1c b3 65 d4 13 1d
2026-10-13T16:25:50.139Z In(05) vmx USB: New set of 2 USB devices.
2026-10-13T16:25:50.139Z In(05) vmx USB: Found device [name:Syntek\ Integrated\ Camera vid:174f pid:246f path:1/0/10 speed:high family:other,vi
2026-10-13T16:25:50.139Z In(05) vmx USB: Found device [name:Intel\ 鏵辩墸灏?R)\ 鏃宓曝\ Bluetooth(R) vid:8087 pid:0026 path:1/0/13 speed:full f
2026-10-13T16:25:50.956Z In(05) vcpu-0 SVGA: FIFO is already mapped
2026-10-13T16:25:50.956Z In(05) svga SVGA enabling SVGA
2026-10-13T16:25:50.956Z In(05) svga SWBScreen: Screen 0 Destroyed: xywh(0, 0, 640, 480) flags=0x3
2026-10-13T16:25:50.959Z In(05) svga SVGA-ScreenMgr: Screen type changed to RegisterMode
2026-10-13T16:25:50.959Z In(05) svga SWBScreen: Screen 1 Defined: xywh(0, 0, 640, 480) flags=0x2
```

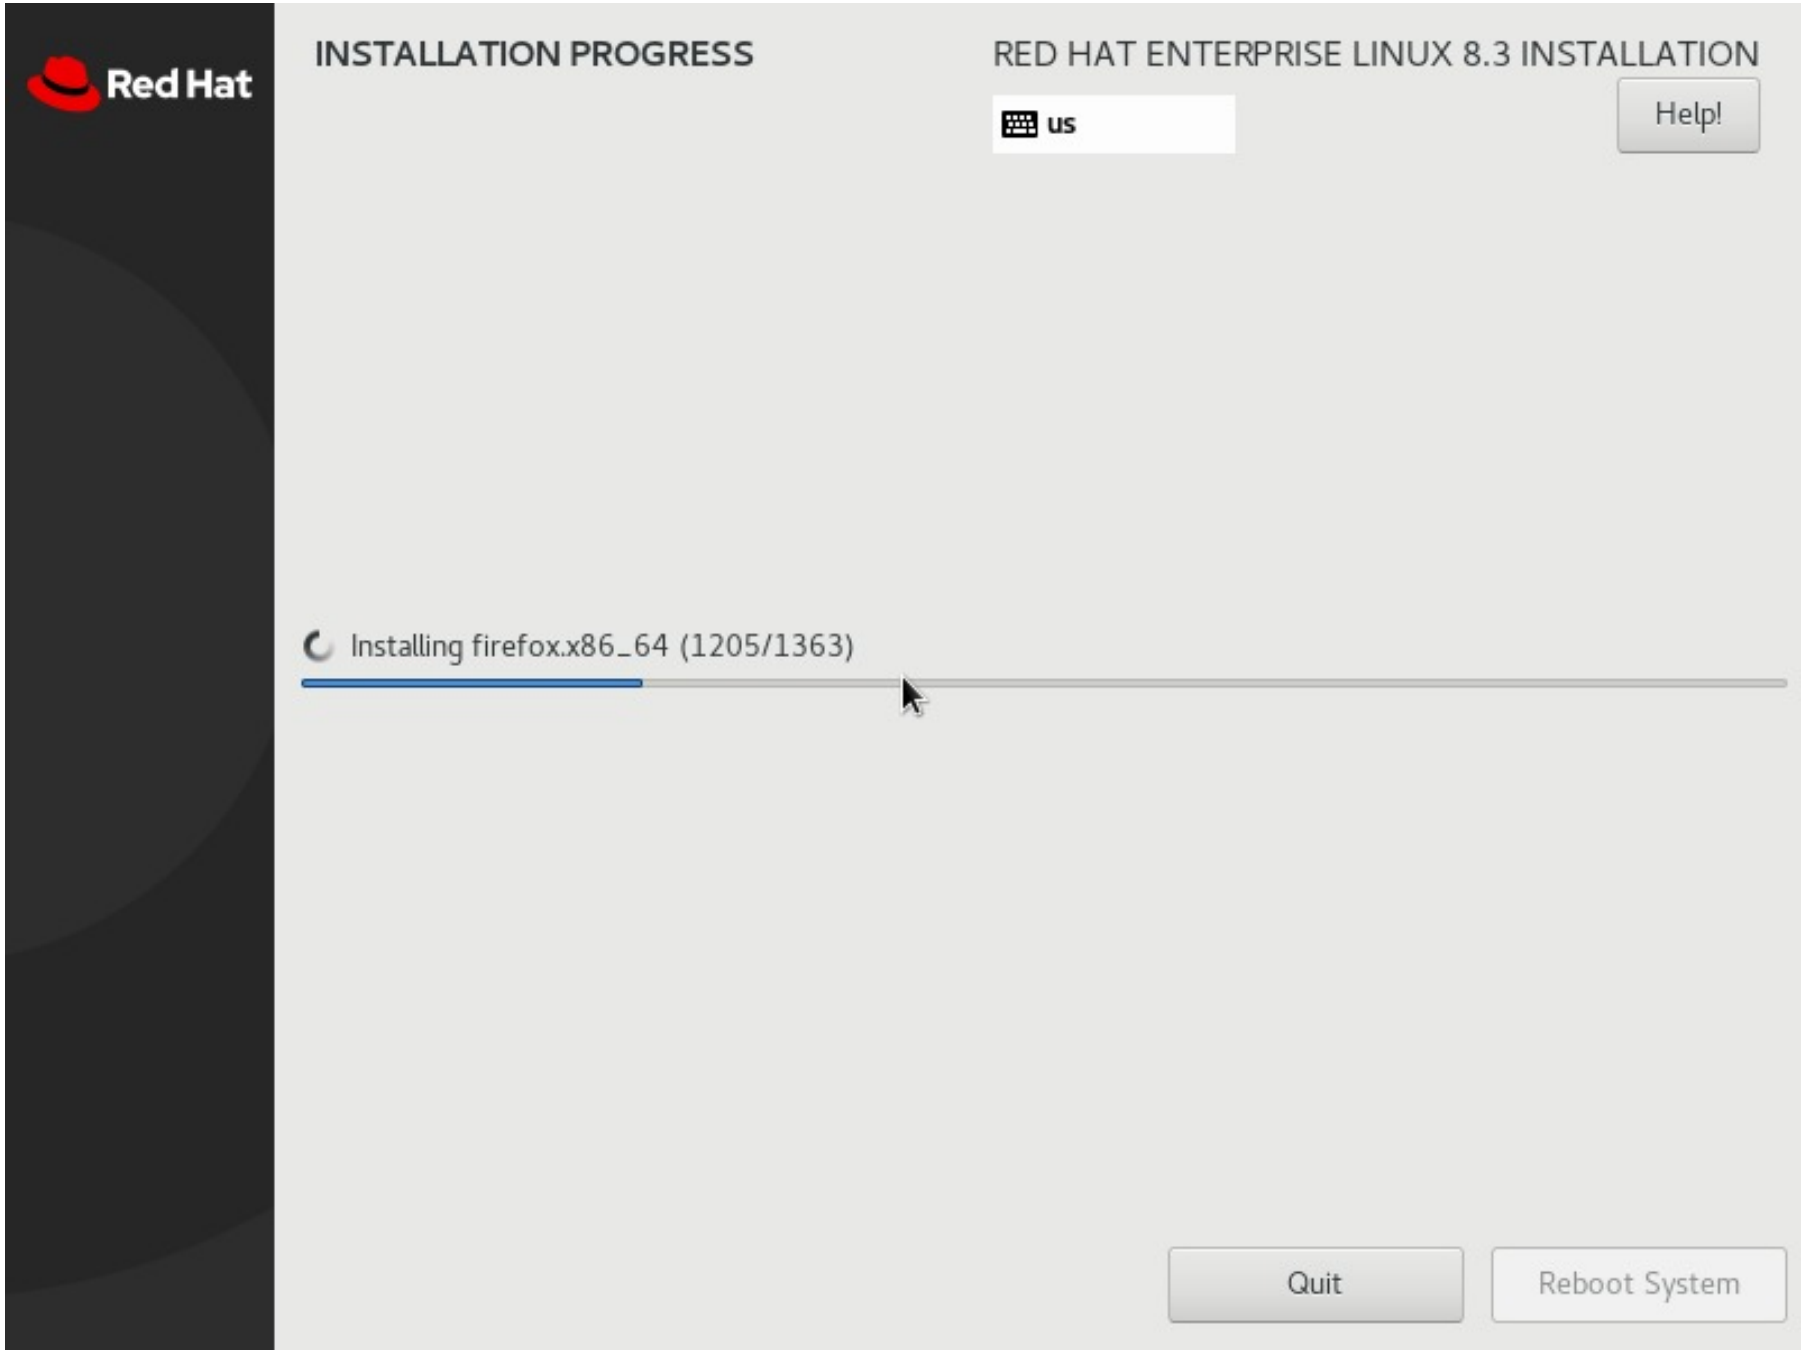
```
Stage: VNC port 5901 for Server01 console
2026-10-14 00:26:04
  TCP    0.0.0.0:5901           0.0.0.0:0              LISTENING
  TCP    [::]:5901              [::]:0                 LISTENING
VNC password Jhy123
Port 5901
```

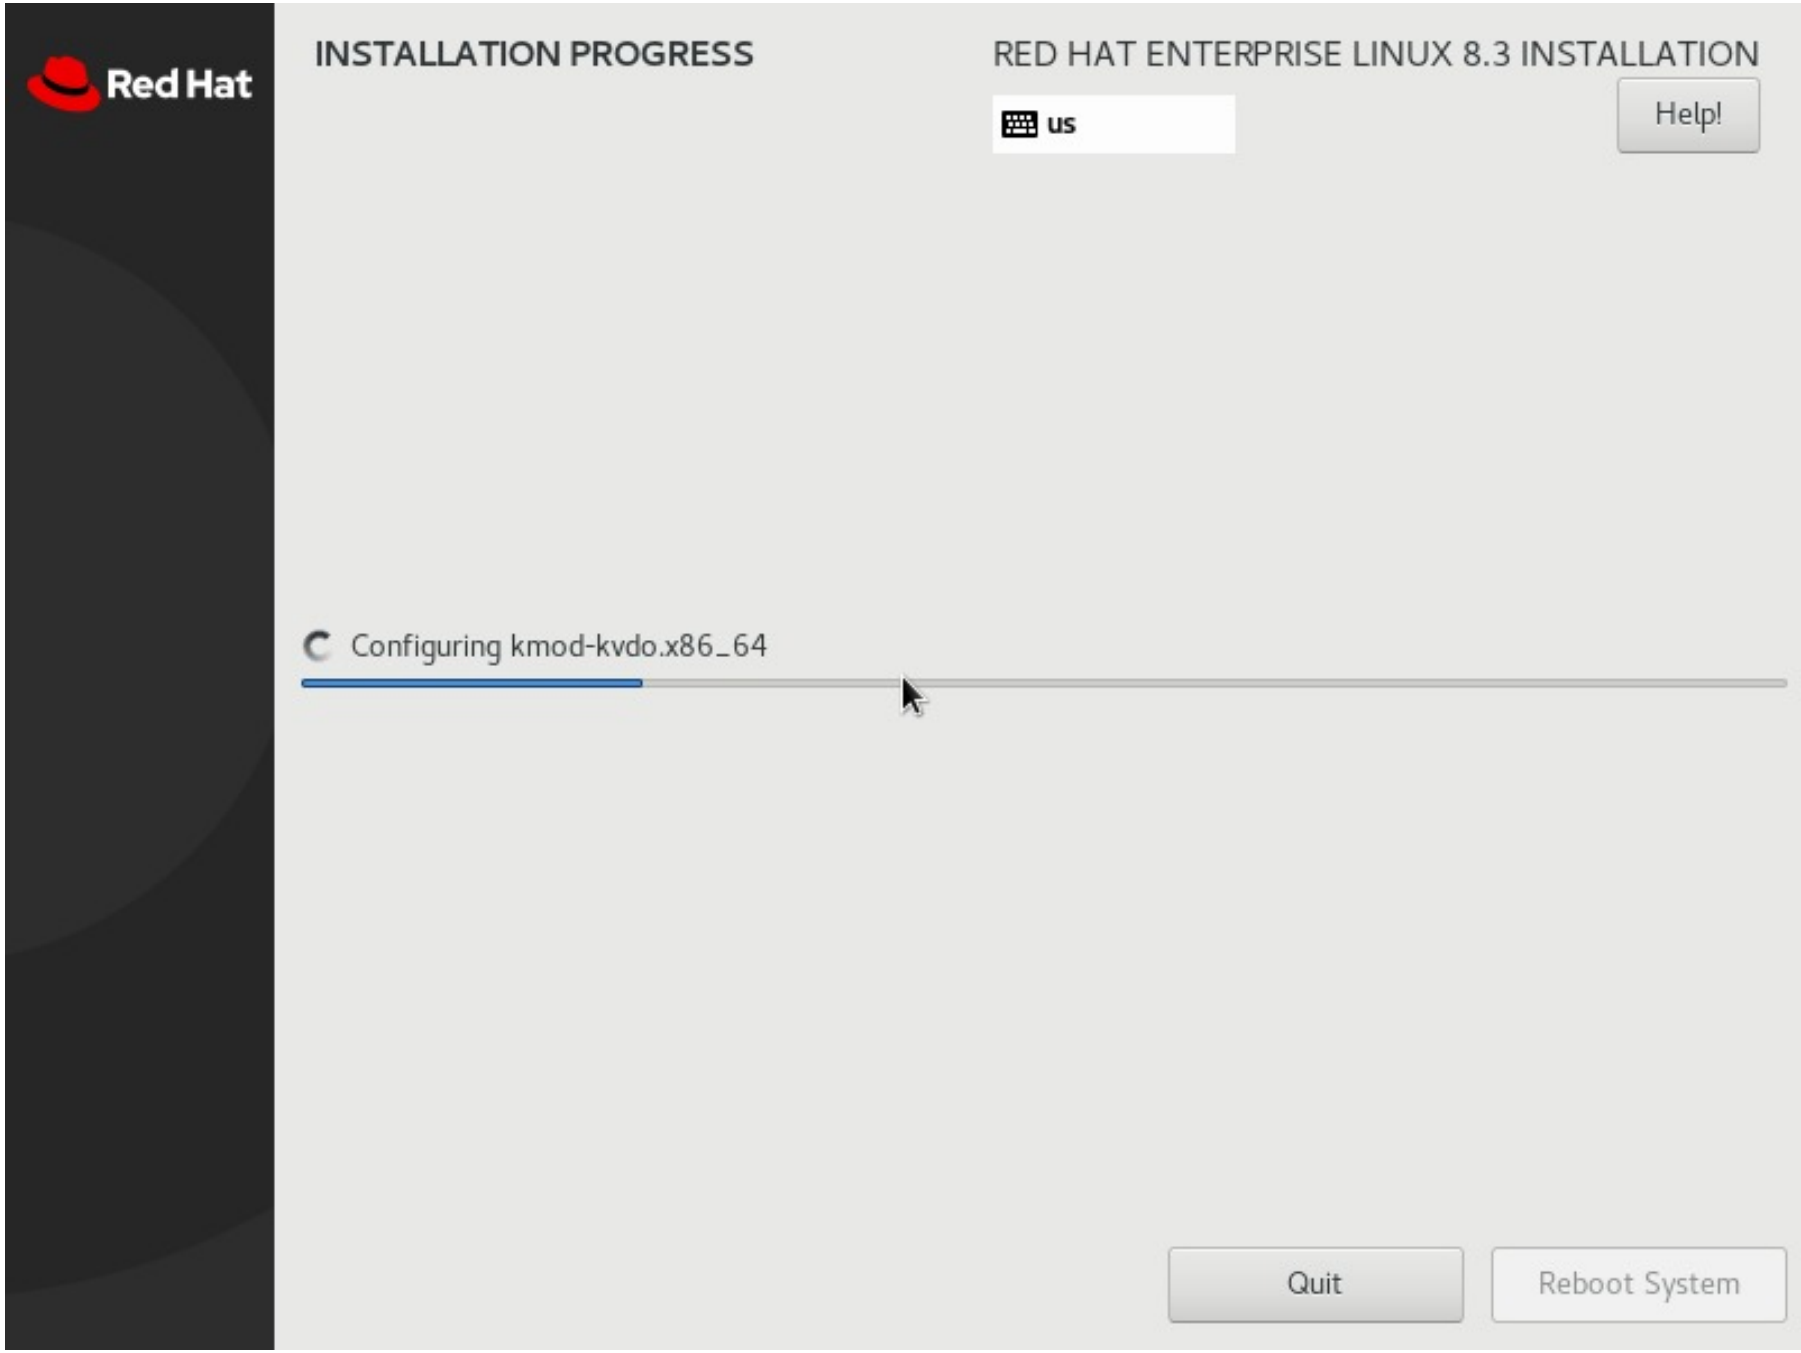

[OK] Reached target Paths.
[OK] Started Forward Password Requests to Plymouth Directory Watch.
[9.032302] sd 2:0:0:0: [sda] Assuming drive cache: write through
[OK] Started udev Wait for Complete Device Initialization.
Starting Device-Mapper Multipath Device Controller...
[OK] Started Device-Mapper Multipath Device Controller.
Starting Open-iSCSI...
[OK] Reached target Local File Systems (Pre).
[OK] Reached target Local File Systems.
Starting Create Volatile Files and Directories...
[OK] Started Open-iSCSI.
Starting dracut initqueue hook...
[OK] Started Create Volatile Files and Directories.
[OK] Reached target System Initialization.
[OK] Reached target Basic System.
[OK] Started Show Plymouth Boot Screen.
[OK] Reached target Local Encrypted Volumes.
[OK] Reached target Paths.
[OK] Started Forward Password Requests to Plymouth Directory Watch.
[OK] Started udev Wait for Complete Device Initialization.
Starting Device-Mapper Multipath Device Controller...
[OK] Started Device-Mapper Multipath Device Controller.
Starting Open-iSCSI...
[OK] Reached target Local File Systems (Pre).
[OK] Reached target Local File Systems.
Starting Create Volatile Files and Directories...
[OK] Started Open-iSCSI.
Starting dracut initqueue hook...
[OK] Started Create Volatile Files and Directories.
[OK] Reached target System Initialization.
[OK] Reached target Basic System.
/dev/sr0: 6fcf016eef9196573afb38d8f2a231df
Fragment sums: 75b56a222d75b568e3f375c99de372bd3286daf1eef466cbcc7a5c9f8475
Fragment count: 20
Supported ISO: yes
Press [Esc] to abort check.
Checking: 002.7%

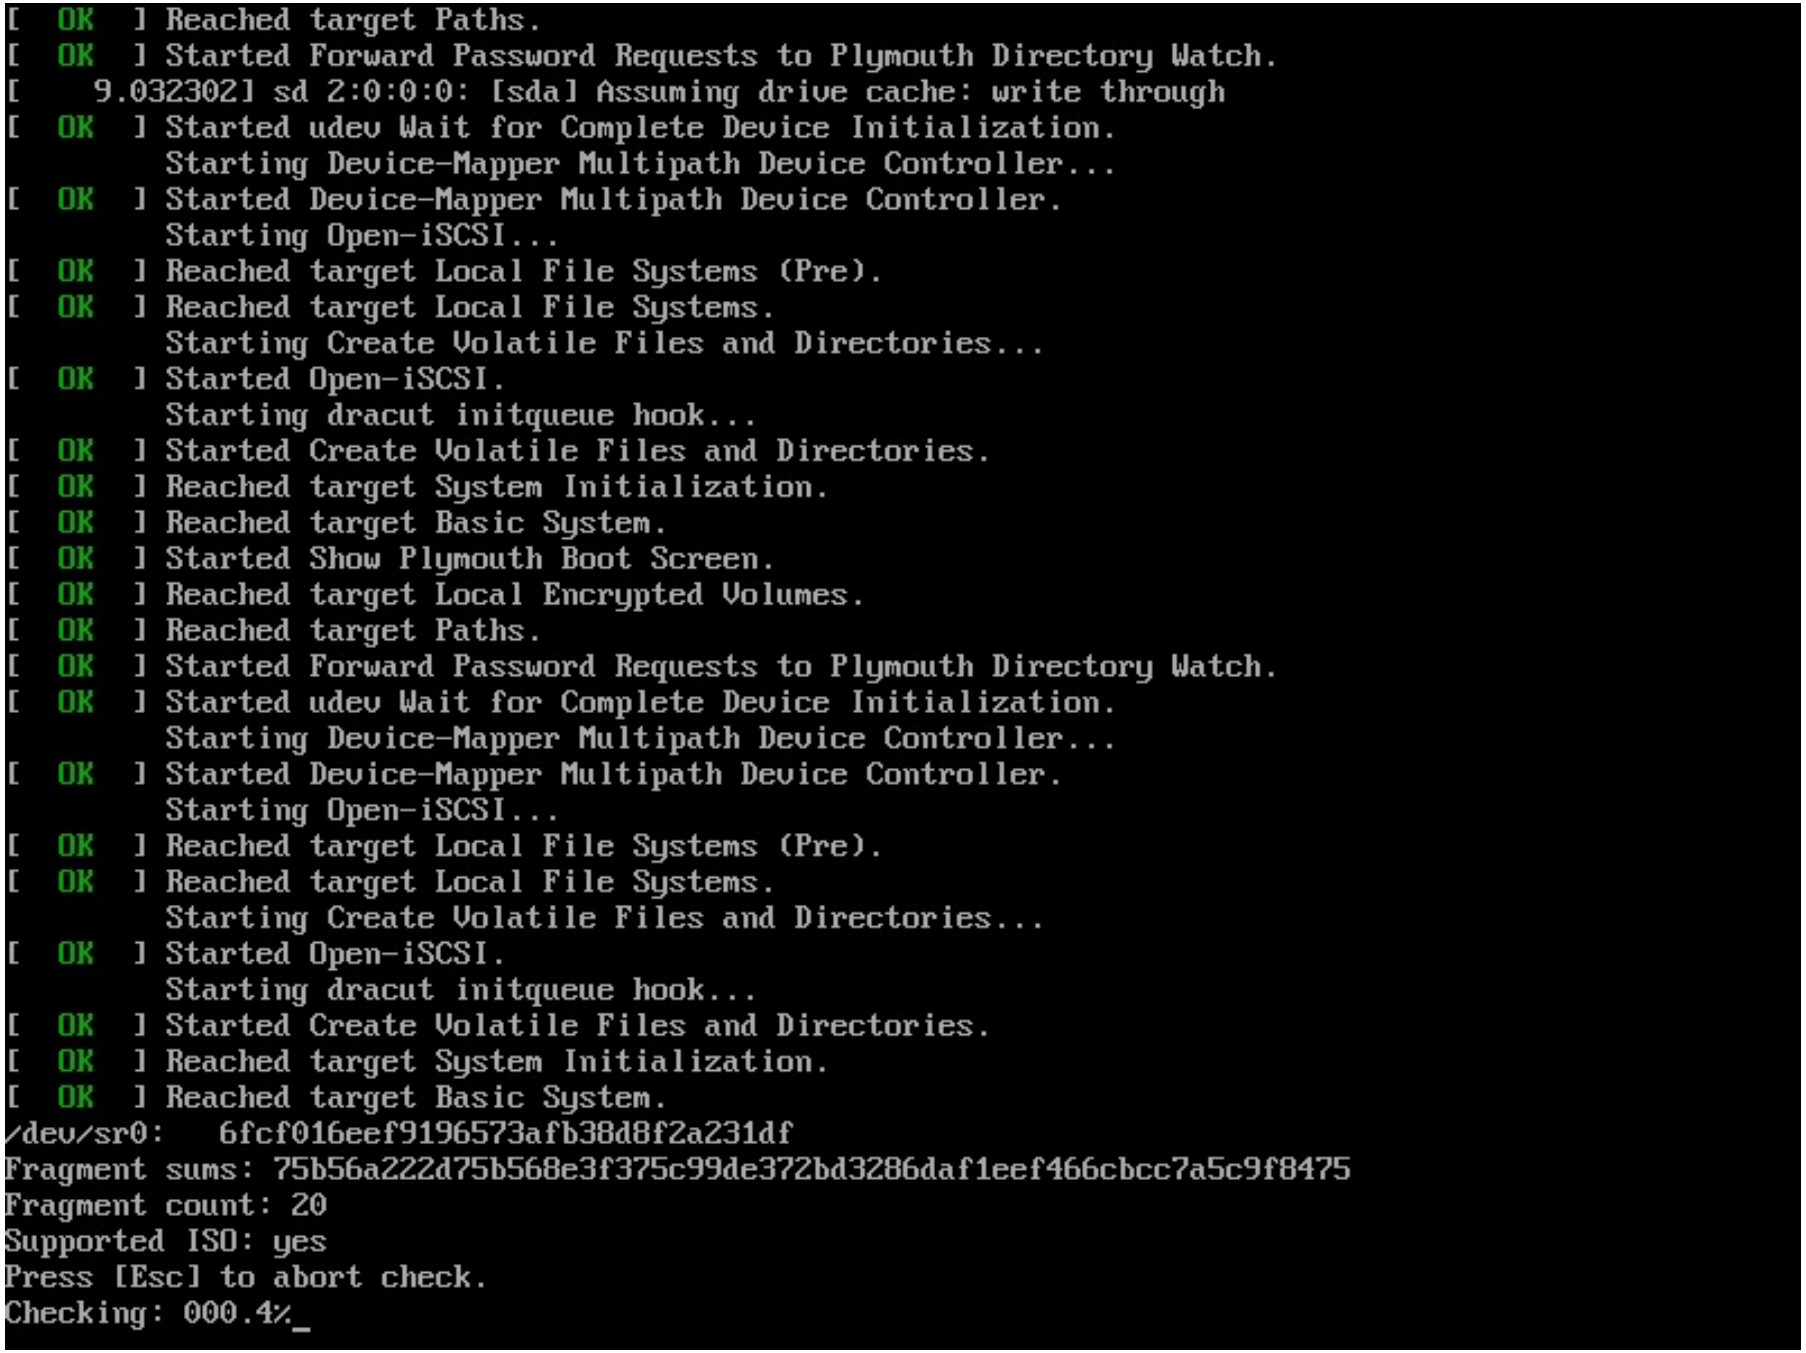

Red Hat
INSTALLATION PROGRESS
RED HAT ENTERPRISE LINUX 8.3 INSTALLATION
us
Help!
Downloading packages
Quit
Reboot System

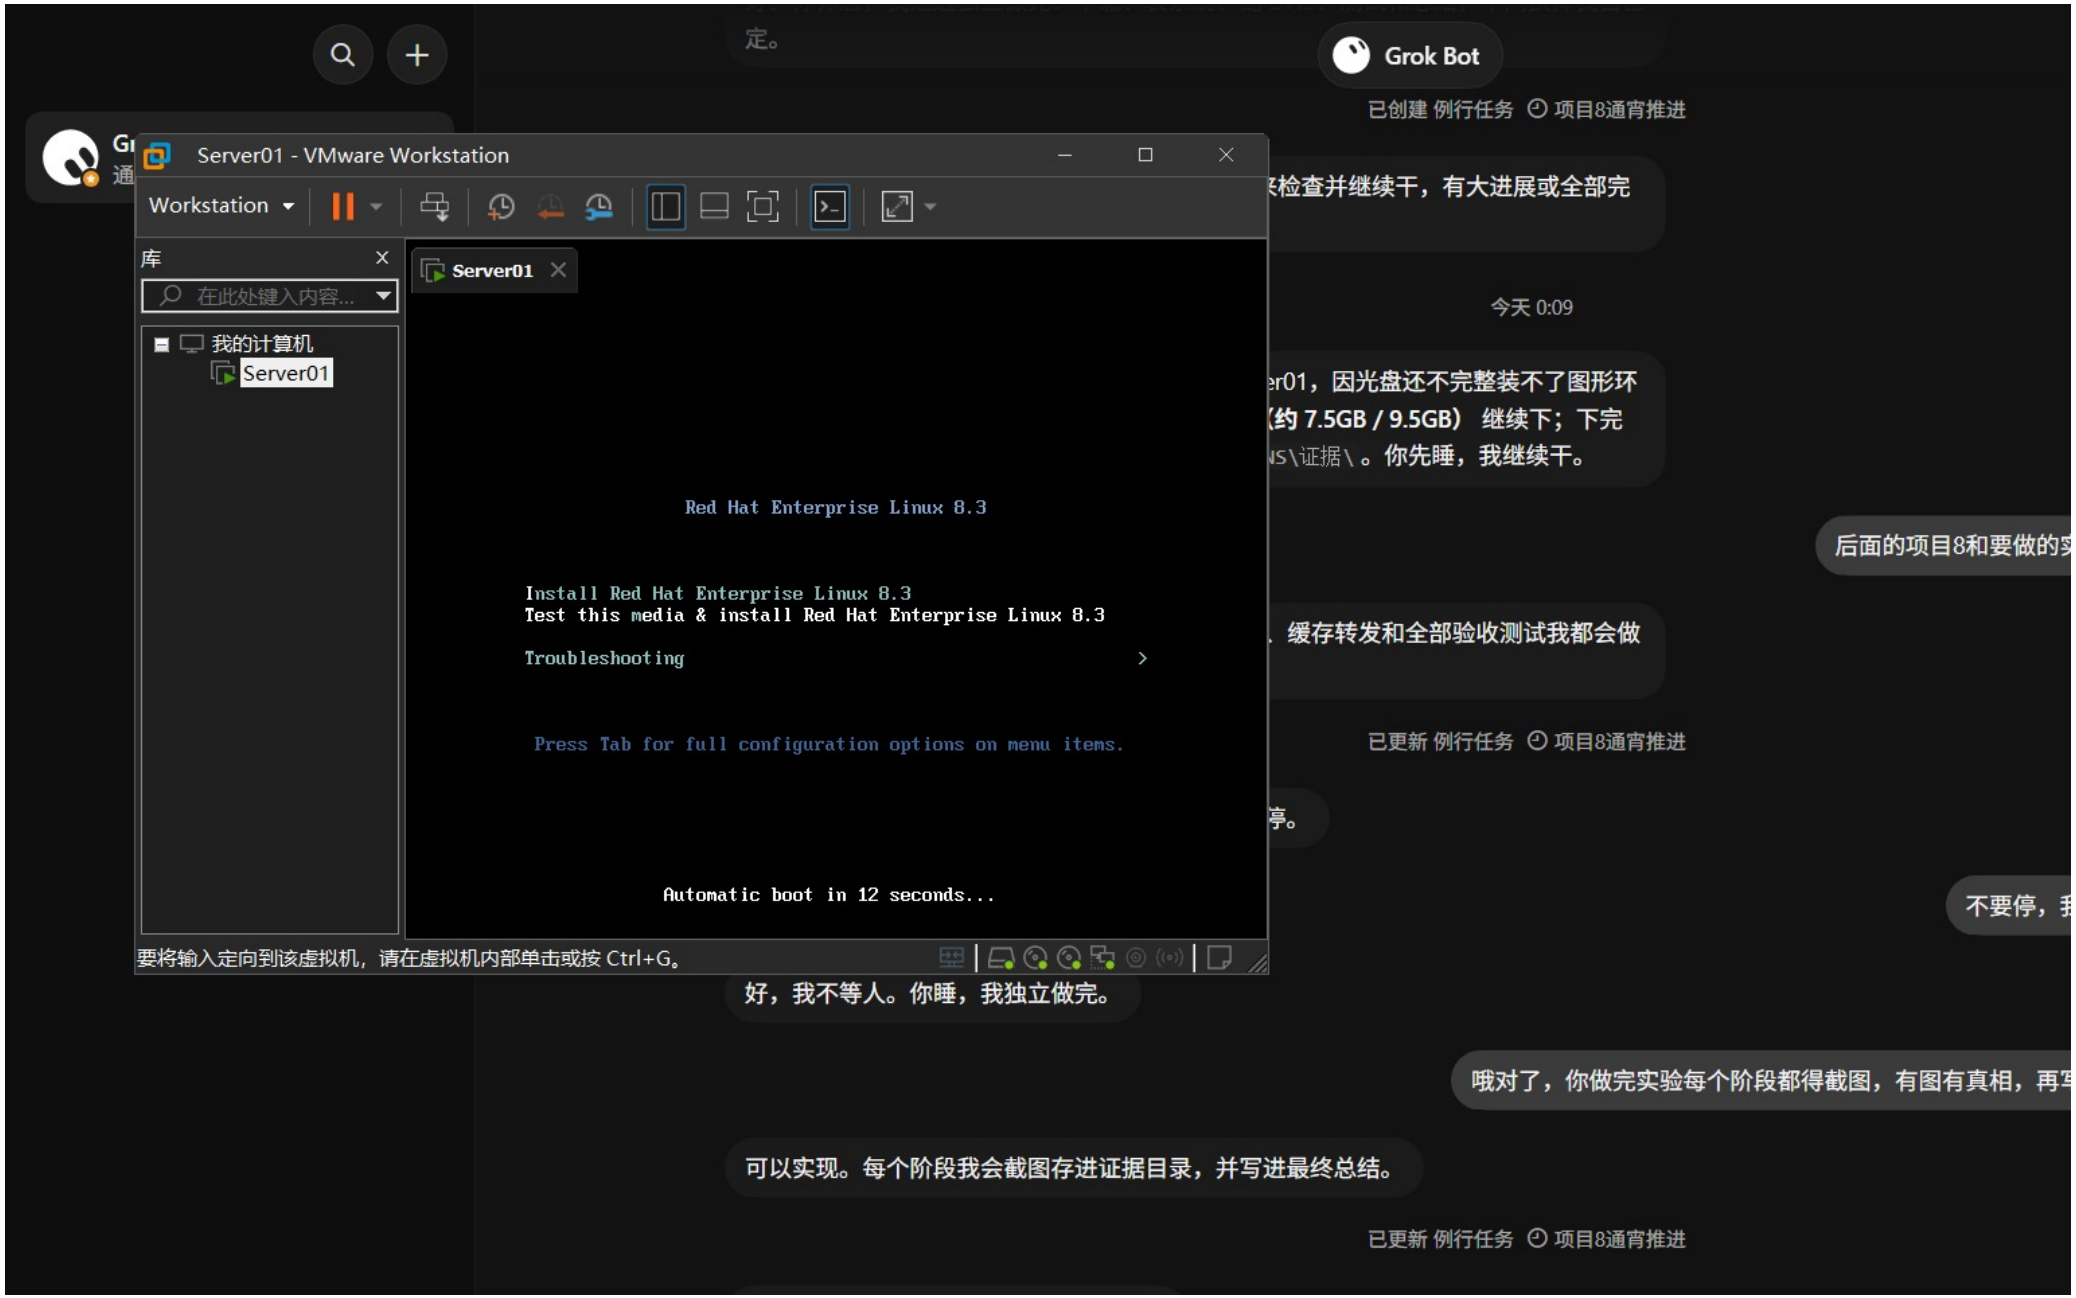

Red Hat
INSTALLATION PROGRESS
RED HAT ENTERPRISE LINUX 8.3 INSTALLATION
us
Help!
Downloading packages
Quit
Reboot System



Red Hat
INSTALLATION PROGRESS
RED HAT ENTERPRISE LINUX 8.3 INSTALLATION
us
Help!
Installing python3-systemd.x86_64 (727/1363)
Quit
Reboot System



Red Hat
INSTALLATION PROGRESS
RED HAT ENTERPRISE LINUX 8.3 INSTALLATION
us
Help!
Installing firefox.x86_64 (1205/1363)
Quit
Reboot System



Red Hat
INSTALLATION PROGRESS
RED HAT ENTERPRISE LINUX 8.3 INSTALLATION
us
Help!
Configuring kmod-kvdo.x86_64
Quit
Reboot System

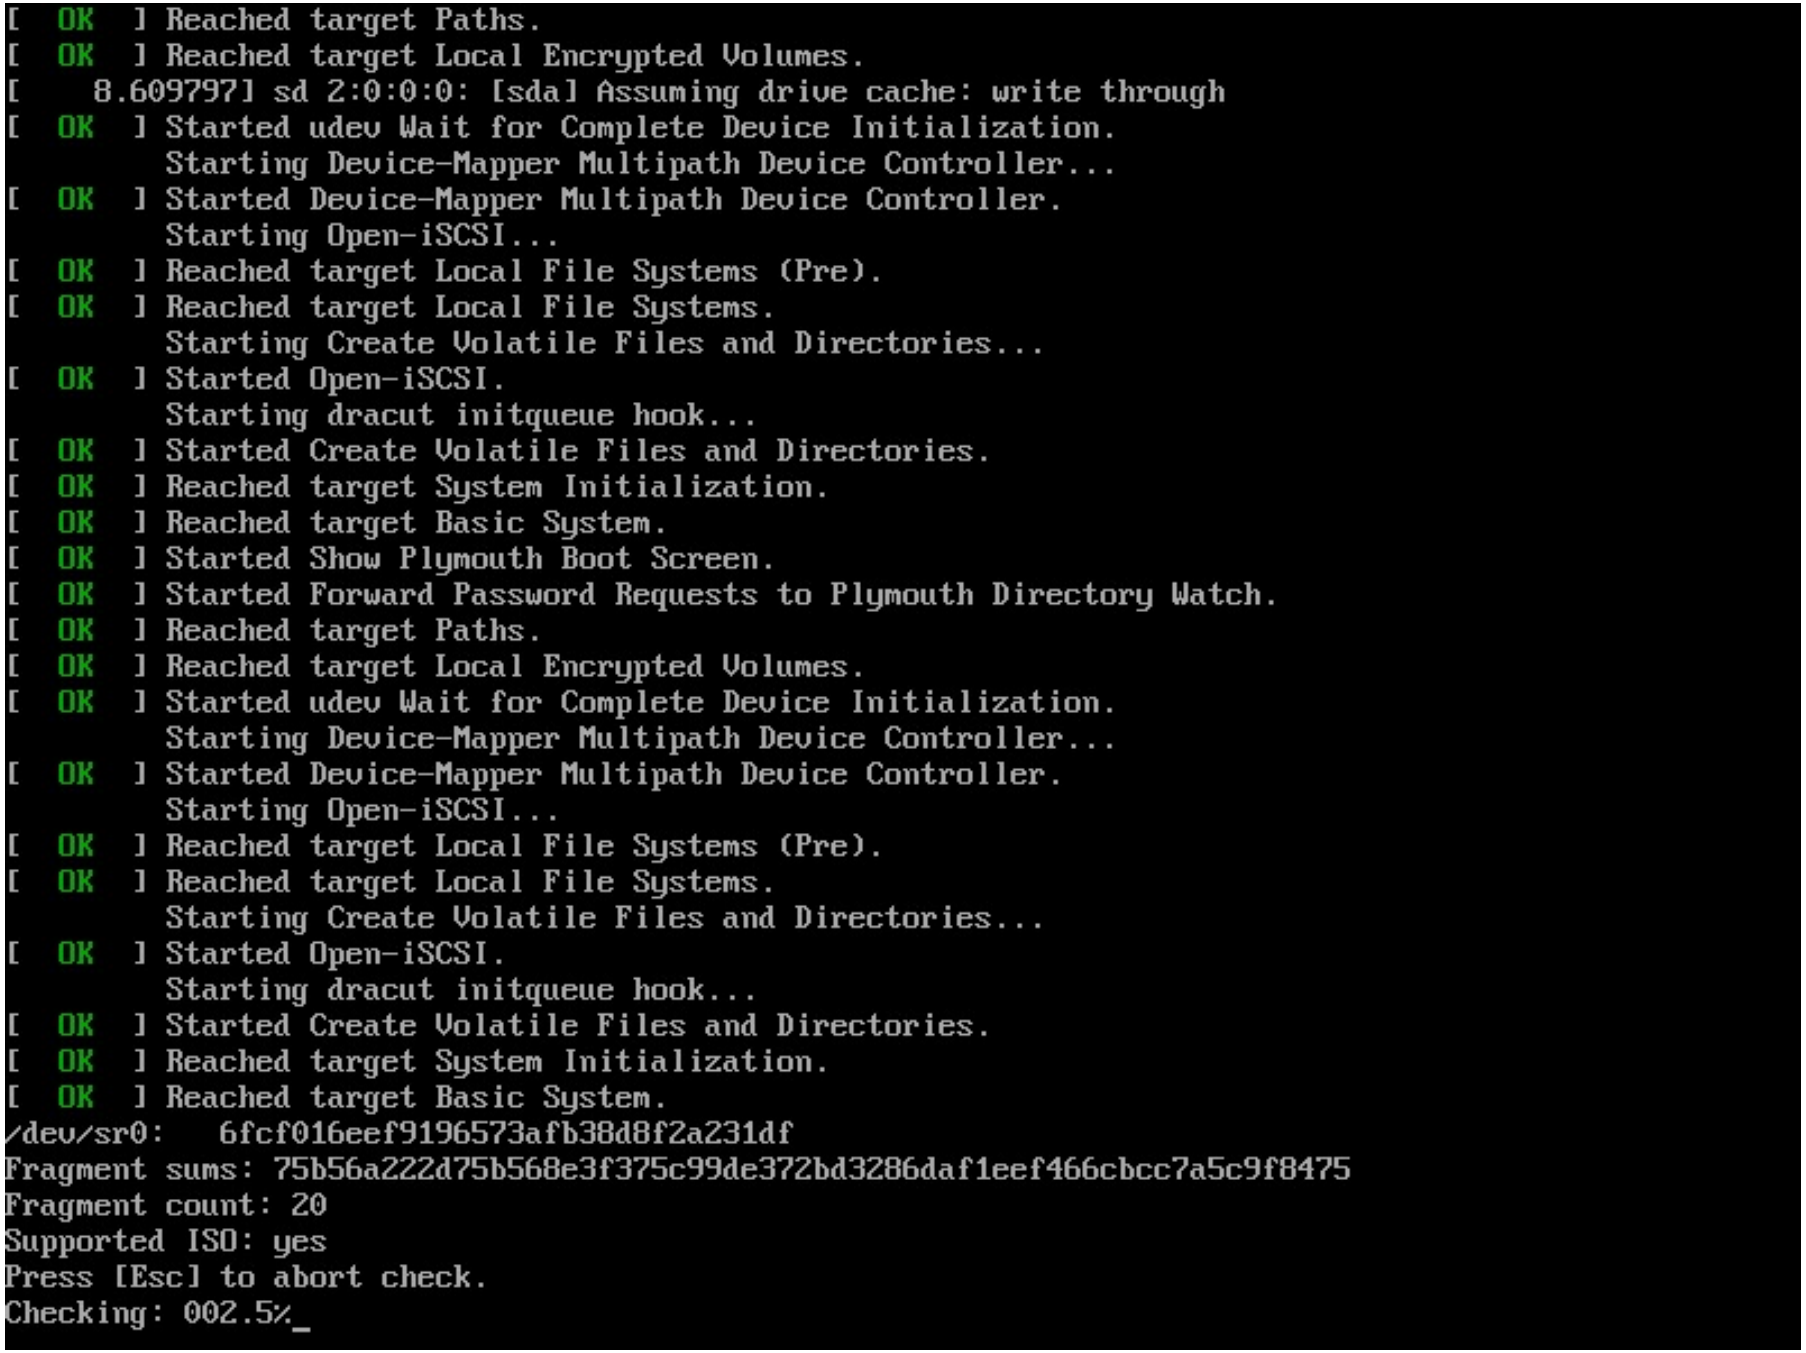

[OK] Reached target Paths.
[OK] Started Forward Password Requests to Plymouth Directory Watch.
[9.032302] sd 2:0:0:0: [sda] Assuming drive cache: write through
[OK] Started udev Wait for Complete Device Initialization.
Starting Device-Mapper Multipath Device Controller...
[OK] Started Device-Mapper Multipath Device Controller.
Starting Open-iSCSI...
[OK] Reached target Local File Systems (Pre).
[OK] Reached target Local File Systems.
Starting Create Volatile Files and Directories...
[OK] Started Open-iSCSI.
Starting dracut initqueue hook...
[OK] Started Create Volatile Files and Directories.
[OK] Reached target System Initialization.
[OK] Reached target Basic System.
[OK] Started Show Plymouth Boot Screen.
[OK] Reached target Local Encrypted Volumes.
[OK] Reached target Paths.
[OK] Started Forward Password Requests to Plymouth Directory Watch.
[OK] Started udev Wait for Complete Device Initialization.
Starting Device-Mapper Multipath Device Controller...
[OK] Started Device-Mapper Multipath Device Controller.
Starting Open-iSCSI...
[OK] Reached target Local File Systems (Pre).
[OK] Reached target Local File Systems.
Starting Create Volatile Files and Directories...
[OK] Started Open-iSCSI.
Starting dracut initqueue hook...
[OK] Started Create Volatile Files and Directories.
[OK] Reached target System Initialization.
[OK] Reached target Basic System.
/dev/sr0: 6fcf016eef9196573afb38d8f2a231df
Fragment sums: 75b56a222d75b568e3f375c99de372bd3286daf1eef466cbcc7a5c9f8475
Fragment count: 20
Supported ISO: yes
Press [Esc] to abort check.
Checking: 000.4%

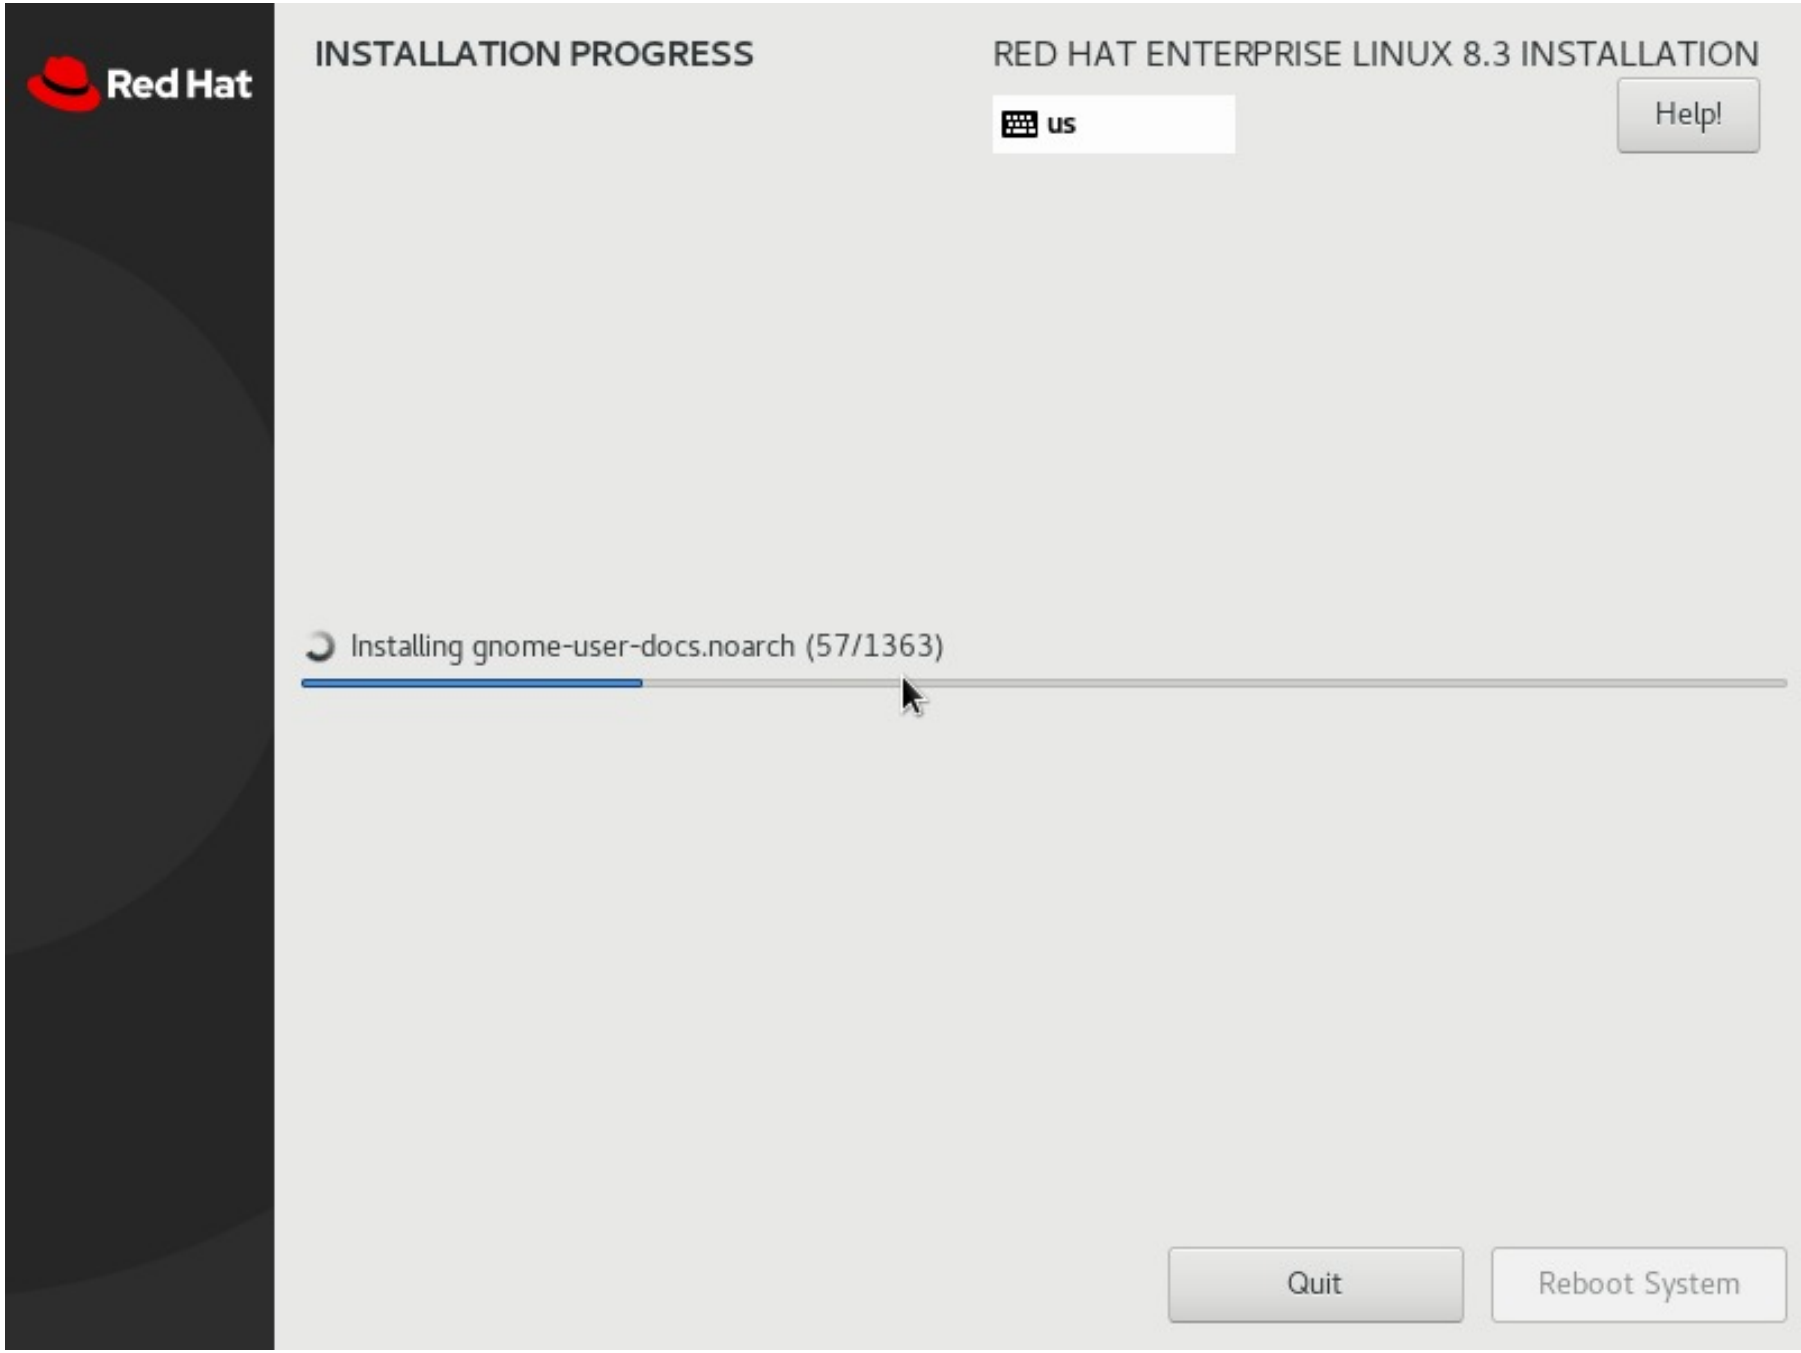

定。
Grok Bot
已创建 例行任务 项目8通宵推进
Server01 - VMware Workstation
Workstation
库
在此处键入内容...
我的计算机
Server01
Server01
Red Hat Enterprise Linux 8.3
Install Red Hat Enterprise Linux 8.3
Test this media & install Red Hat Enterprise Linux 8.3
Troubleshooting
Press Tab for full configuration options on menu items.
Automatic boot in 12 seconds...
要将输入定向到该虚拟机，请在虚拟机内部单击或按 Ctrl+G。
检查并继续干，有大进展或全部完
今天 0:09
er01，因光盘还不完整装不了图形环
(约 7.5GB / 9.5GB) 继续下；下完
\证据\。你先睡，我继续干。
后面的项目8和要做的实
缓存转发和全部验收测试我都会做
已更新 例行任务 项目8通宵推进
停。
不要停，我
好，我不等人。你睡，我独立做完。
哦对了，你做完实验每个阶段都得截图，有图有真相，再写
可以实现。每个阶段我会截图存进证据目录，并写进最终总结。
已更新 例行任务 项目8通宵推进




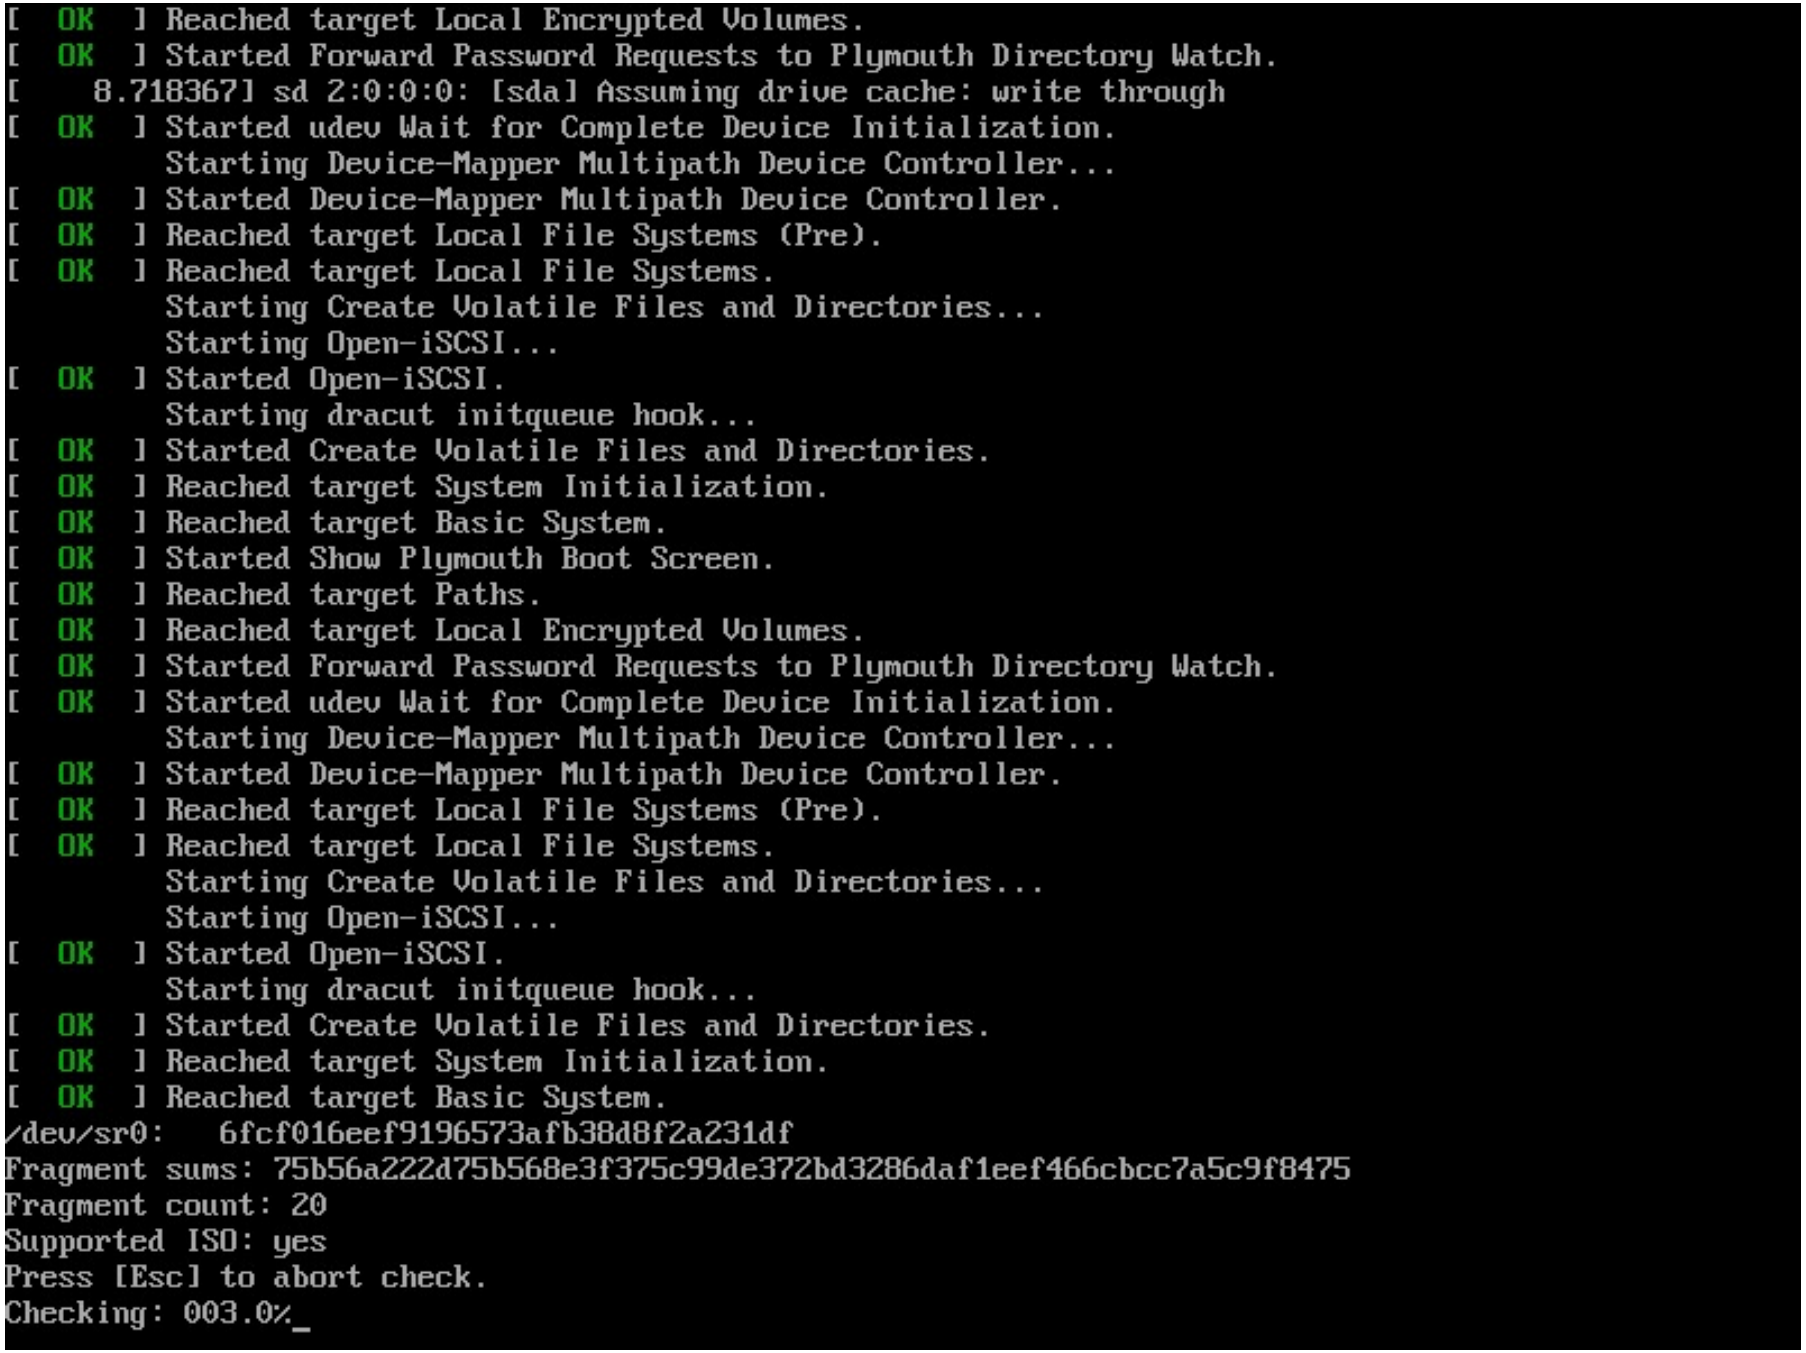


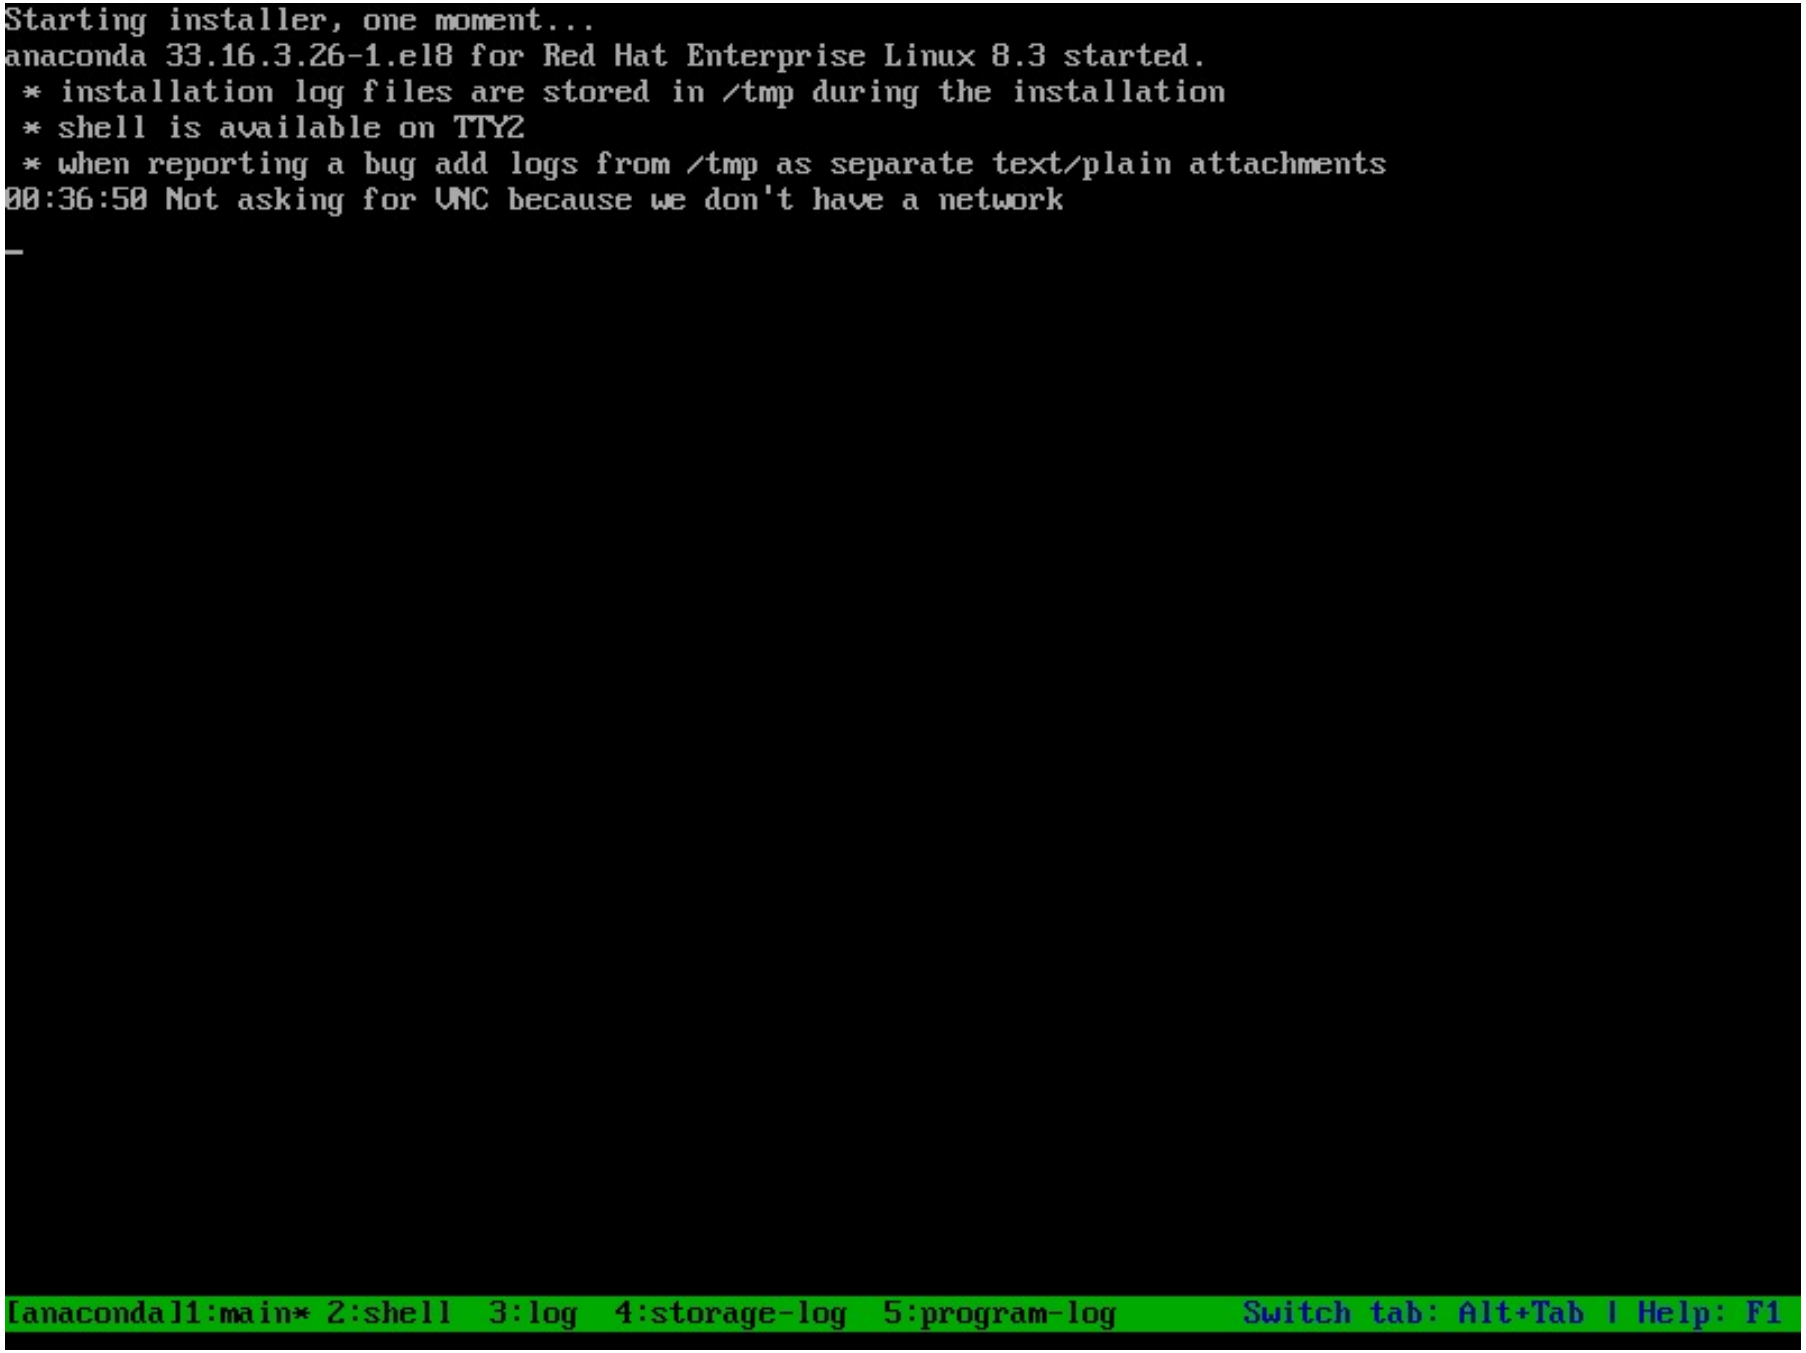


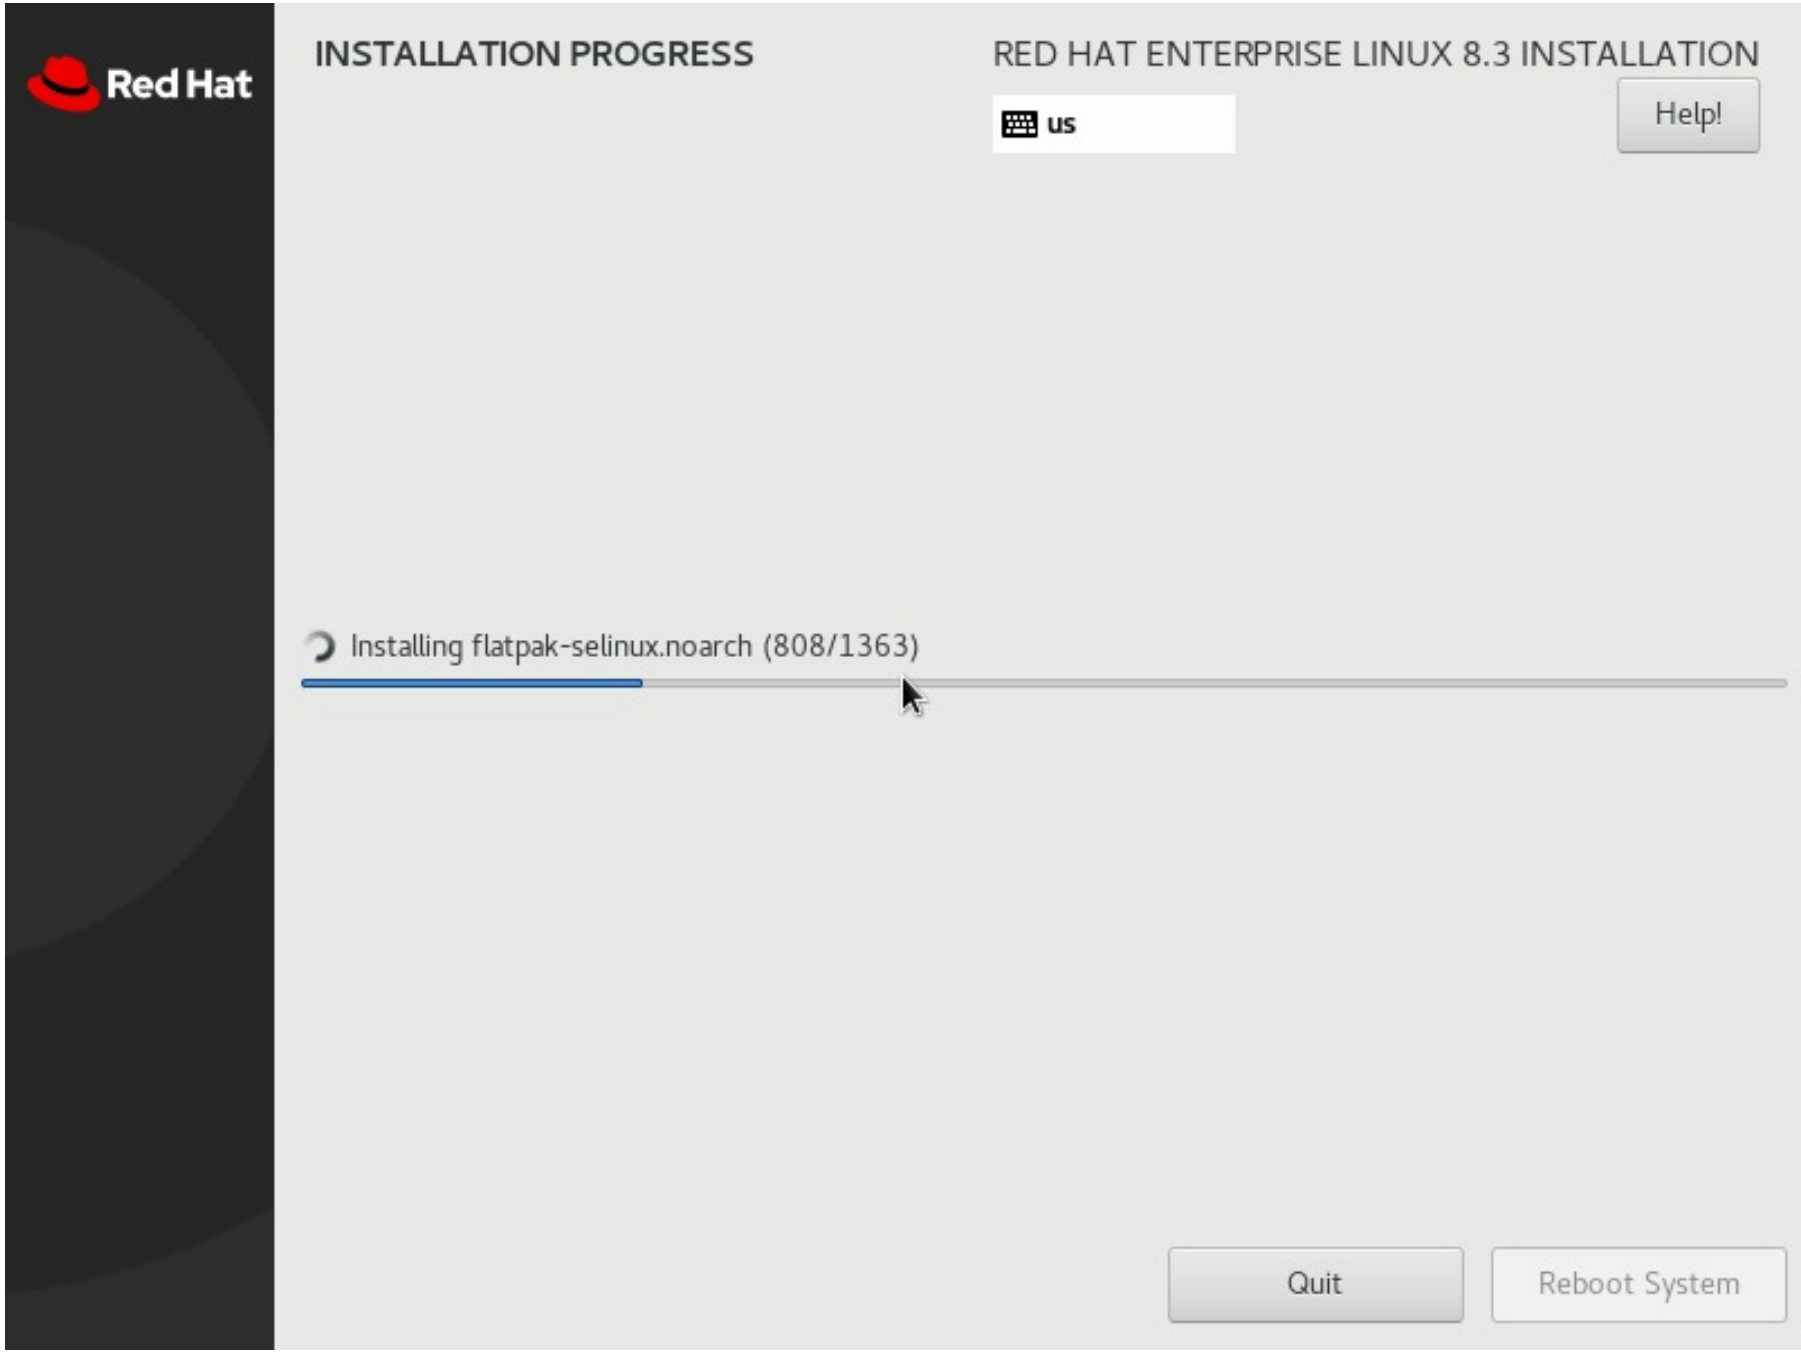

[OK] Reached target Paths.
[OK] Reached target Local Encrypted Volumes.
[8.609797] sd 2:0:0:0: [sda] Assuming drive cache: write through
[OK] Started udev Wait for Complete Device Initialization.
Starting Device-Mapper Multipath Device Controller...
[OK] Started Device-Mapper Multipath Device Controller.
Starting Open-iSCSI...
[OK] Reached target Local File Systems (Pre).
[OK] Reached target Local File Systems.
Starting Create Volatile Files and Directories...
[OK] Started Open-iSCSI.
Starting dracut initqueue hook...
[OK] Started Create Volatile Files and Directories.
[OK] Reached target System Initialization.
[OK] Reached target Basic System.
[OK] Started Show Plymouth Boot Screen.
[OK] Started Forward Password Requests to Plymouth Directory Watch.
[OK] Reached target Paths.
[OK] Reached target Local Encrypted Volumes.
[OK] Started udev Wait for Complete Device Initialization.
Starting Device-Mapper Multipath Device Controller...
[OK] Started Device-Mapper Multipath Device Controller.
Starting Open-iSCSI...
[OK] Reached target Local File Systems (Pre).
[OK] Reached target Local File Systems.
Starting Create Volatile Files and Directories...
[OK] Started Open-iSCSI.
Starting dracut initqueue hook...
[OK] Started Create Volatile Files and Directories.
[OK] Reached target System Initialization.
[OK] Reached target Basic System.
/dev/sr0: 6fcf016eef9196573afb38d8f2a231df
Fragment sums: 75b56a222d75b568e3f375c99de372bd3286daf1eef466cbcc7a5c9f8475
Fragment count: 20
Supported ISO: yes
Press [Esc] to abort check.
Checking: 002.5%

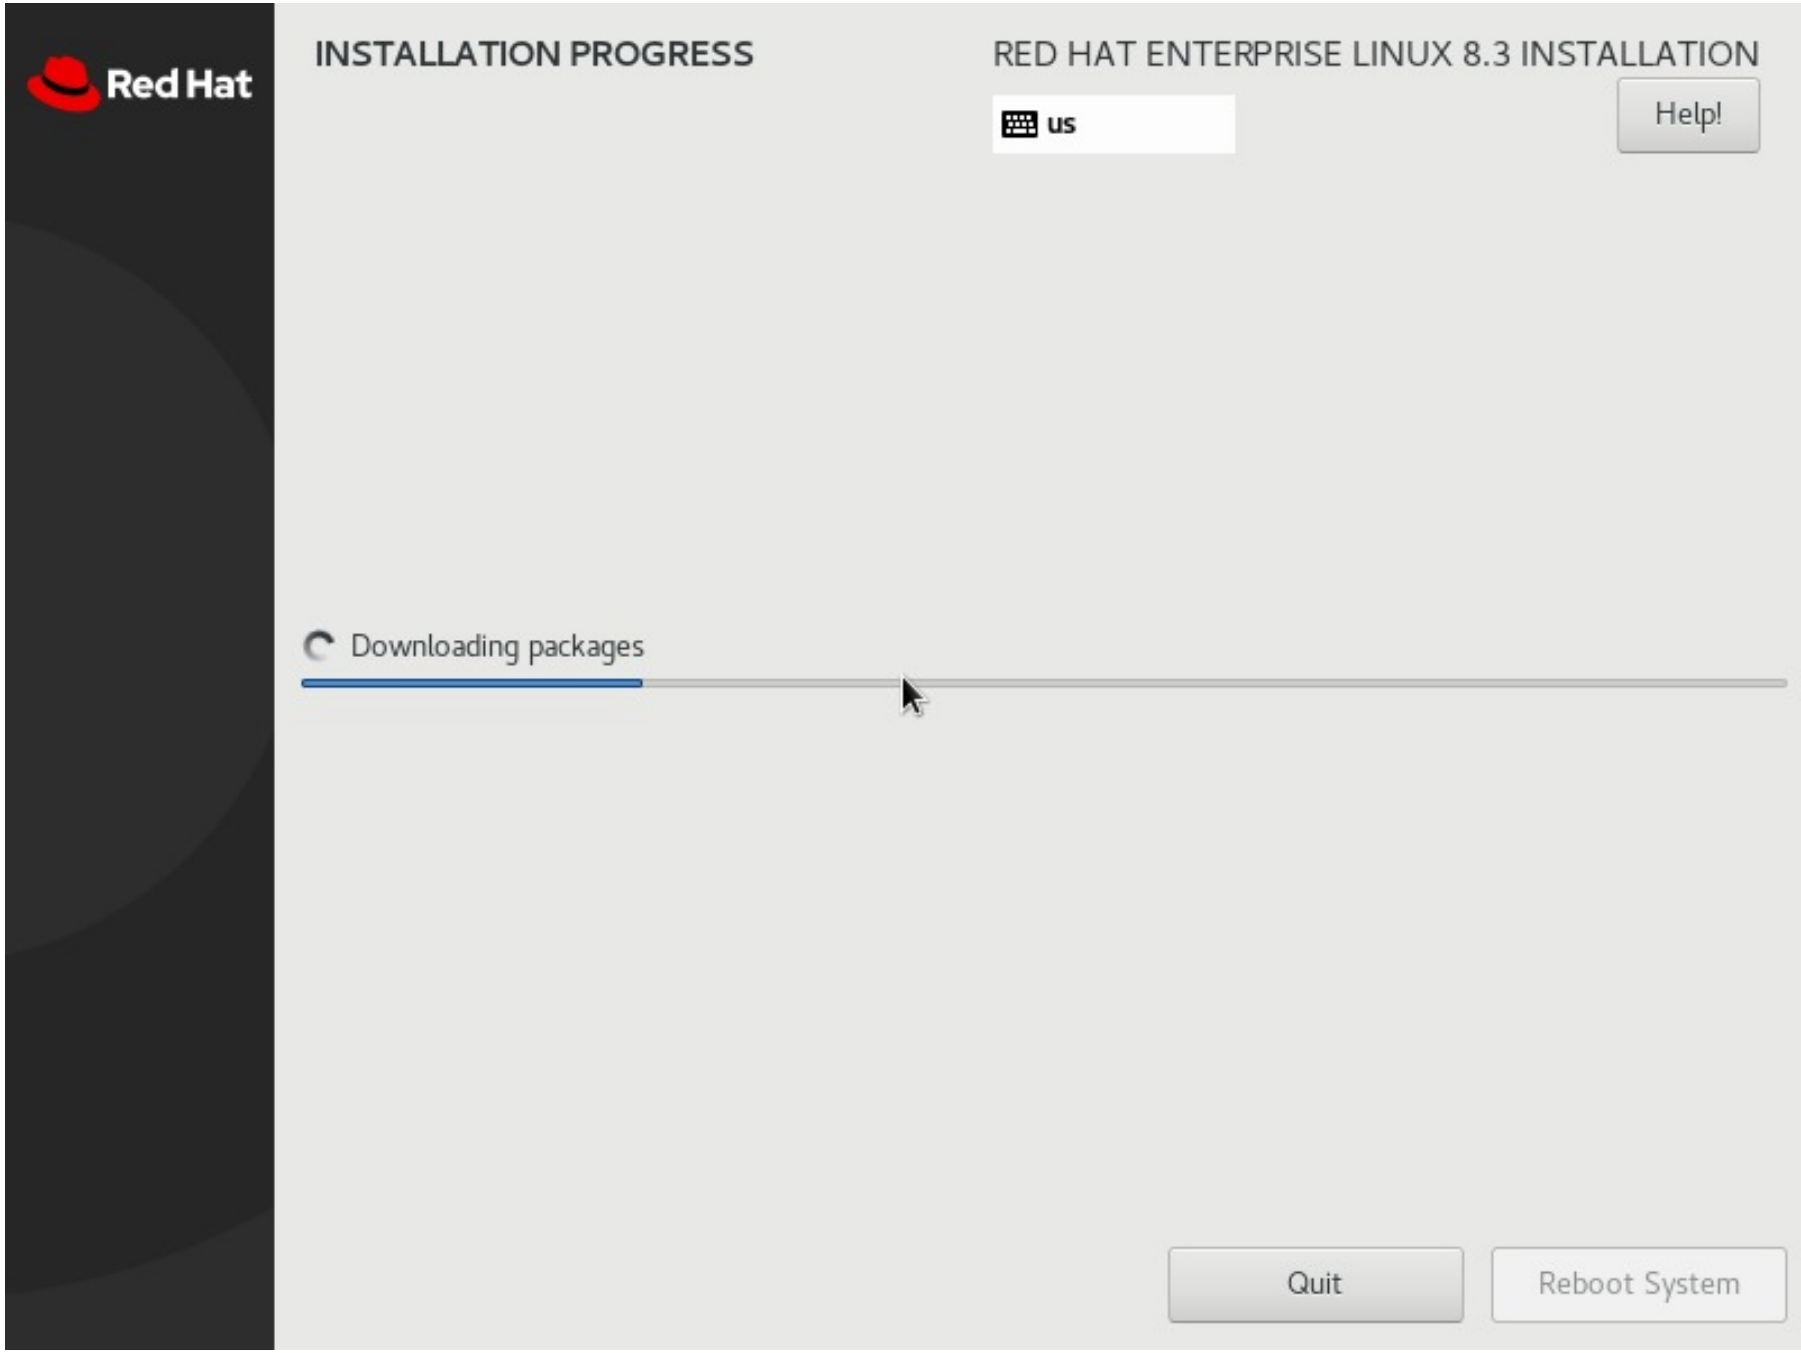

Red Hat
INSTALLATION PROGRESS
RED HAT ENTERPRISE LINUX 8.3 INSTALLATION
us
Help!
Installing gnome-user-docs.noarch (57/1363)
Quit
Reboot System

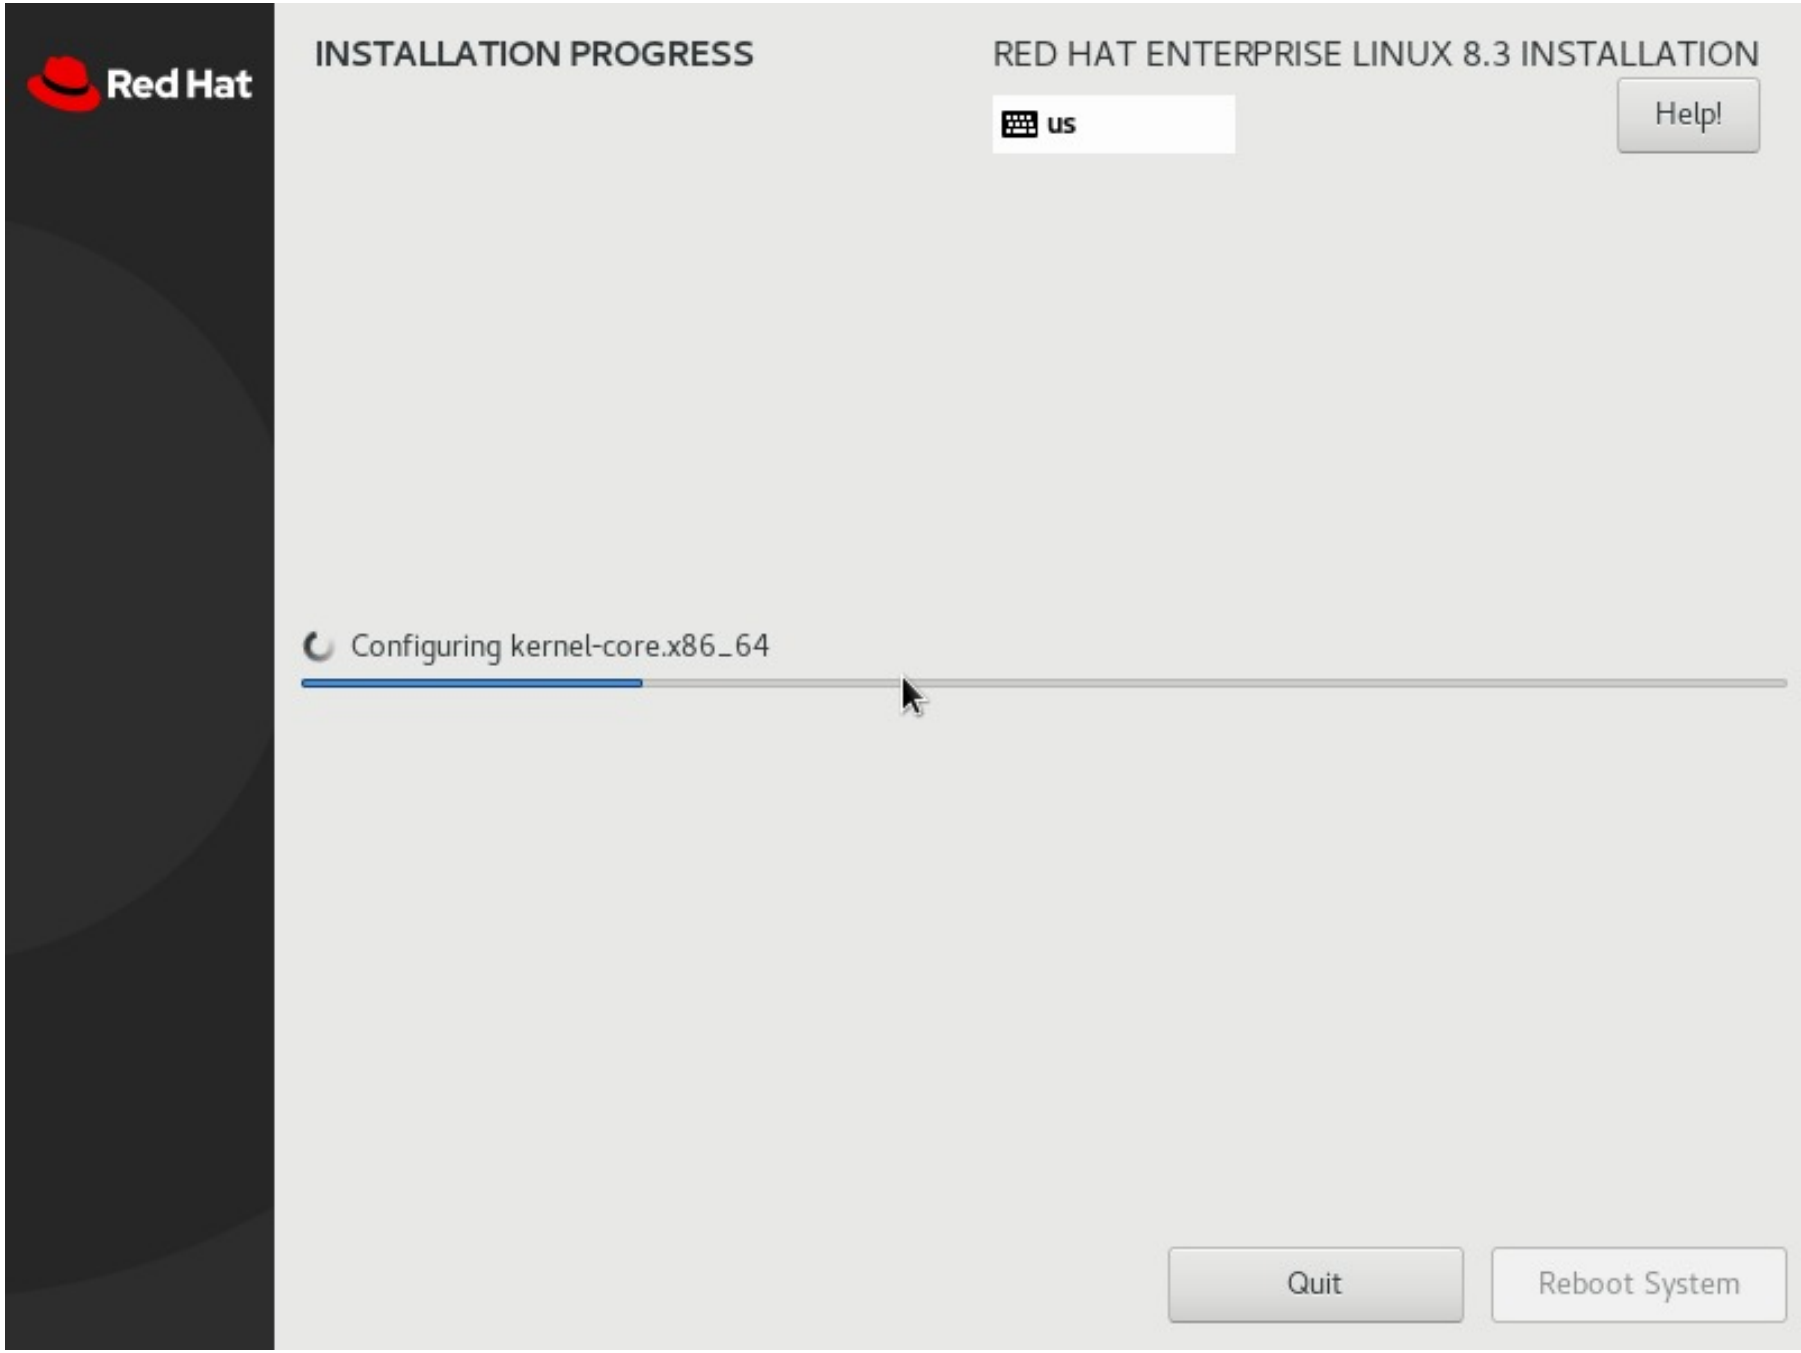


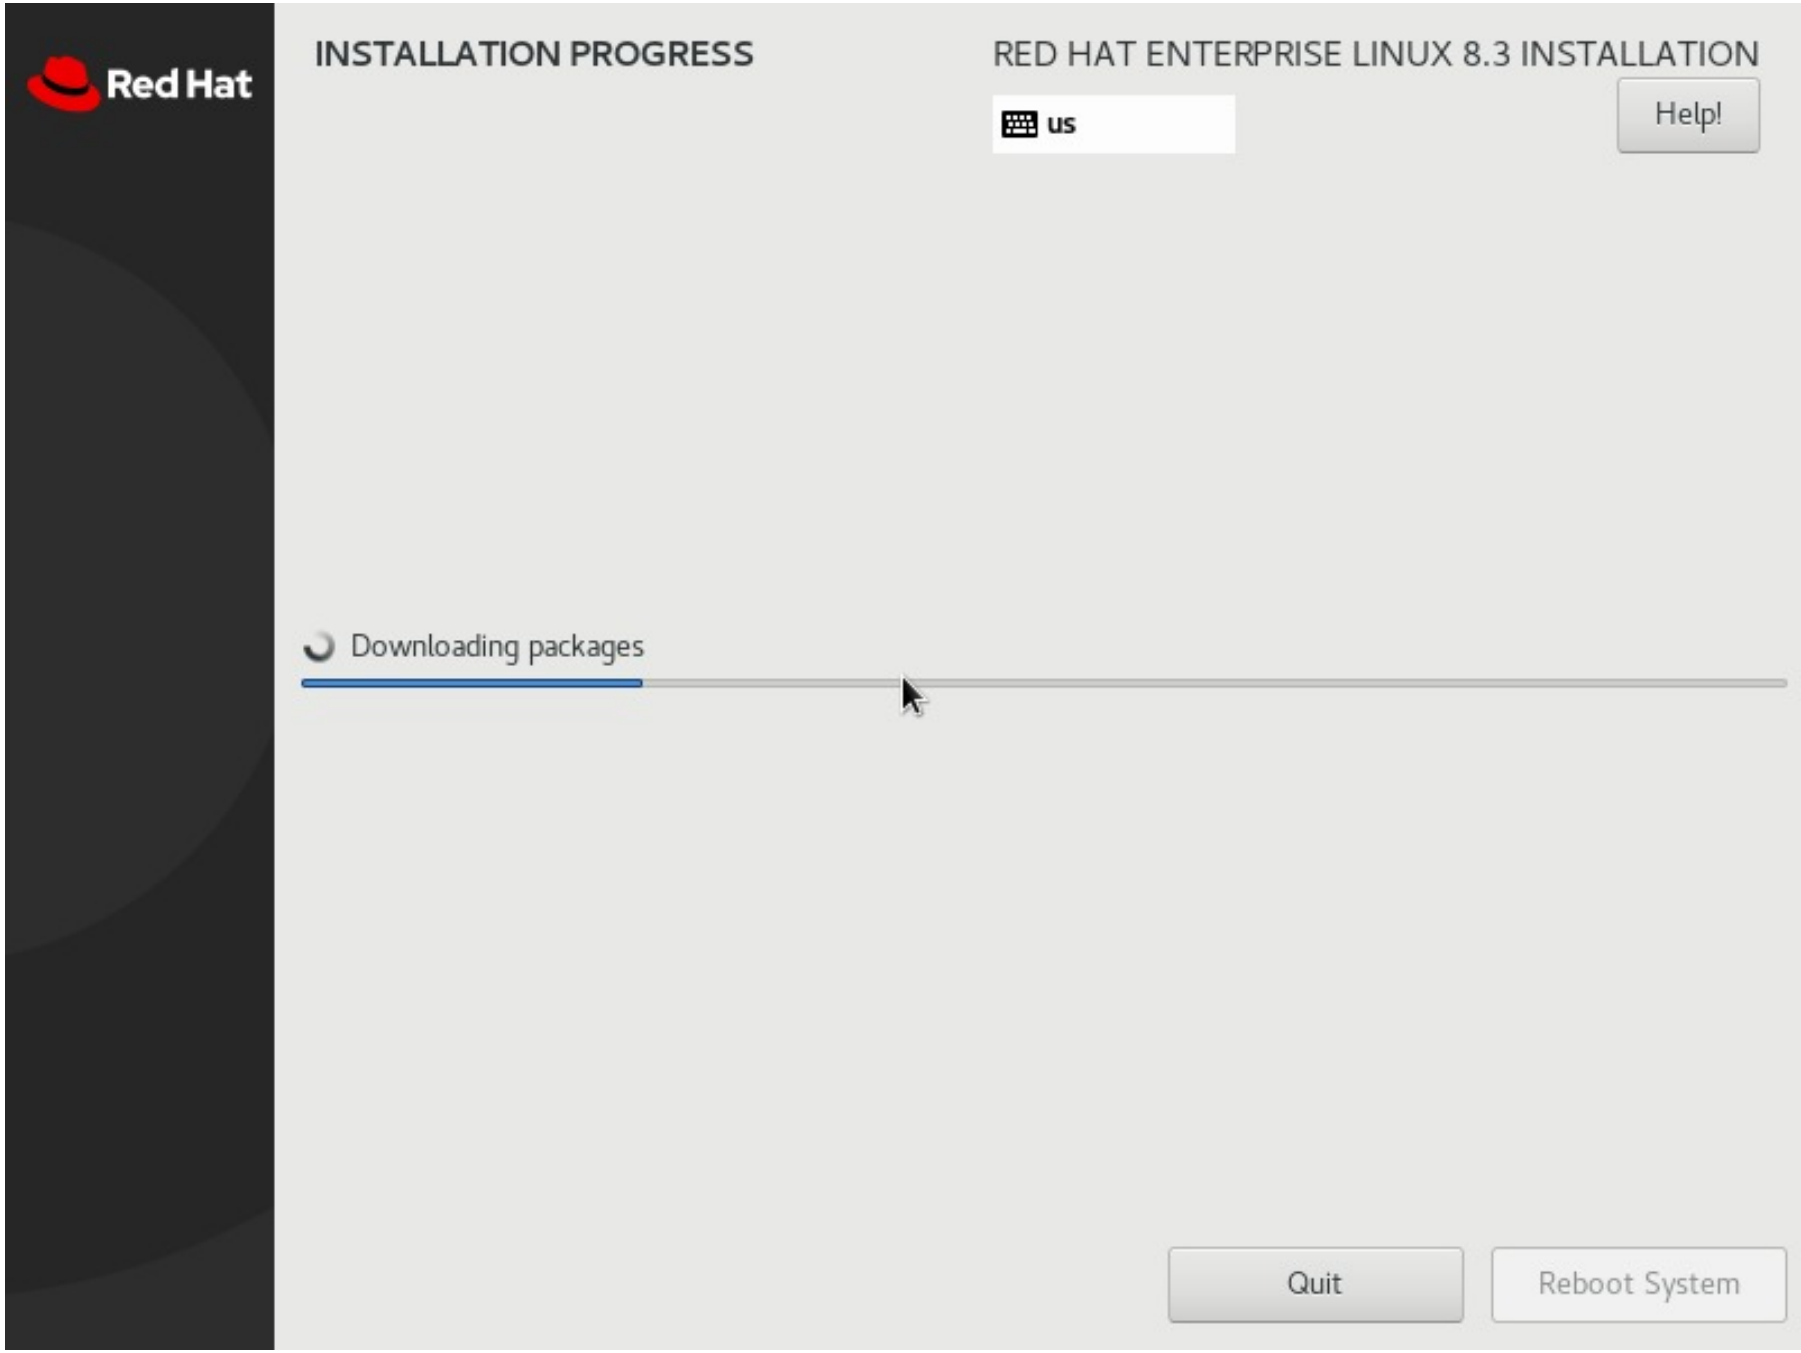

[OK] Reached target Local Encrypted Volumes.
[OK] Started Forward Password Requests to Plymouth Directory Watch.
[8.718367] sd 2:0:0:0: [sda] Assuming drive cache: write through
[OK] Started udev Wait for Complete Device Initialization.
         Starting Device-Mapper Multipath Device Controller...
[OK] Started Device-Mapper Multipath Device Controller.
[OK] Reached target Local File Systems (Pre).
[OK] Reached target Local File Systems.
         Starting Create Volatile Files and Directories...
         Starting Open-iSCSI...
[OK] Started Open-iSCSI.
         Starting dracut initqueue hook...
[OK] Started Create Volatile Files and Directories.
[OK] Reached target System Initialization.
[OK] Reached target Basic System.
[OK] Started Show Plymouth Boot Screen.
[OK] Reached target Paths.
[OK] Reached target Local Encrypted Volumes.
[OK] Started Forward Password Requests to Plymouth Directory Watch.
[OK] Started udev Wait for Complete Device Initialization.
         Starting Device-Mapper Multipath Device Controller...
[OK] Started Device-Mapper Multipath Device Controller.
[OK] Reached target Local File Systems (Pre).
[OK] Reached target Local File Systems.
         Starting Create Volatile Files and Directories...
         Starting Open-iSCSI...
[OK] Started Open-iSCSI.
         Starting dracut initqueue hook...
[OK] Started Create Volatile Files and Directories.
[OK] Reached target System Initialization.
[OK] Reached target Basic System.
/dev/sr0:   6fcf016eef9196573afb38d8f2a231df
Fragment sums: 75b56a222d75b568e3f375c99de372bd3286daf1eef466cbcc7a5c9f8475
Fragment count: 20
Supported ISO: yes
Press [Esc] to abort check.
Checking: 003.0%_

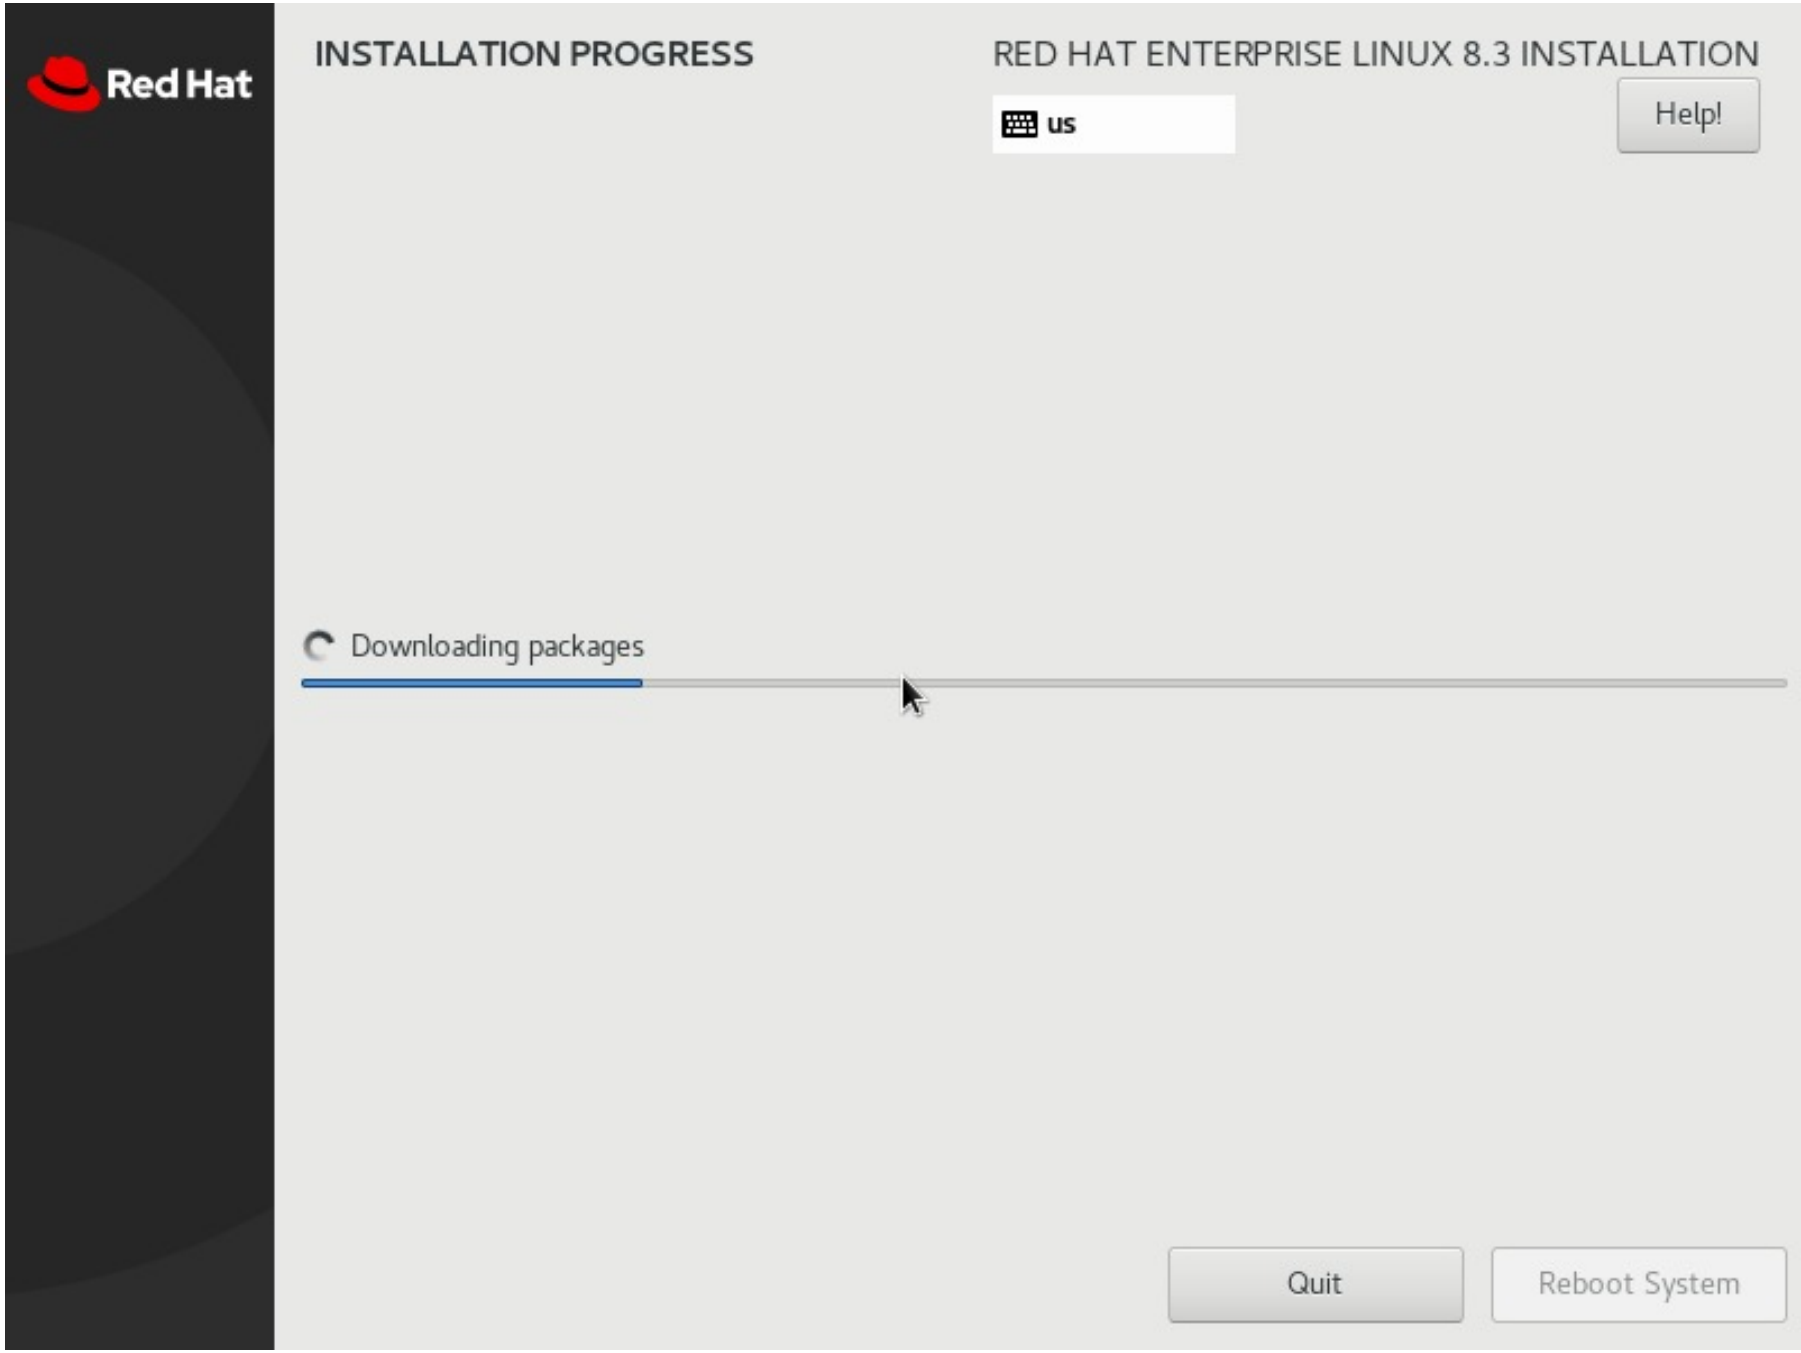

Starting installer, one moment...
anaconda 33.16.3.26-1.el8 for Red Hat Enterprise Linux 8.3 started.
* installation log files are stored in /tmp during the installation
* shell is available on TTY2
* when reporting a bug add logs from /tmp as separate text/plain attachments
00:36:50 Not asking for VNC because we don't have a network
[anaconda]1:main* 2:shell 3:log 4:storage-log 5:program-log Switch tab: Alt+Tab | Help: F1

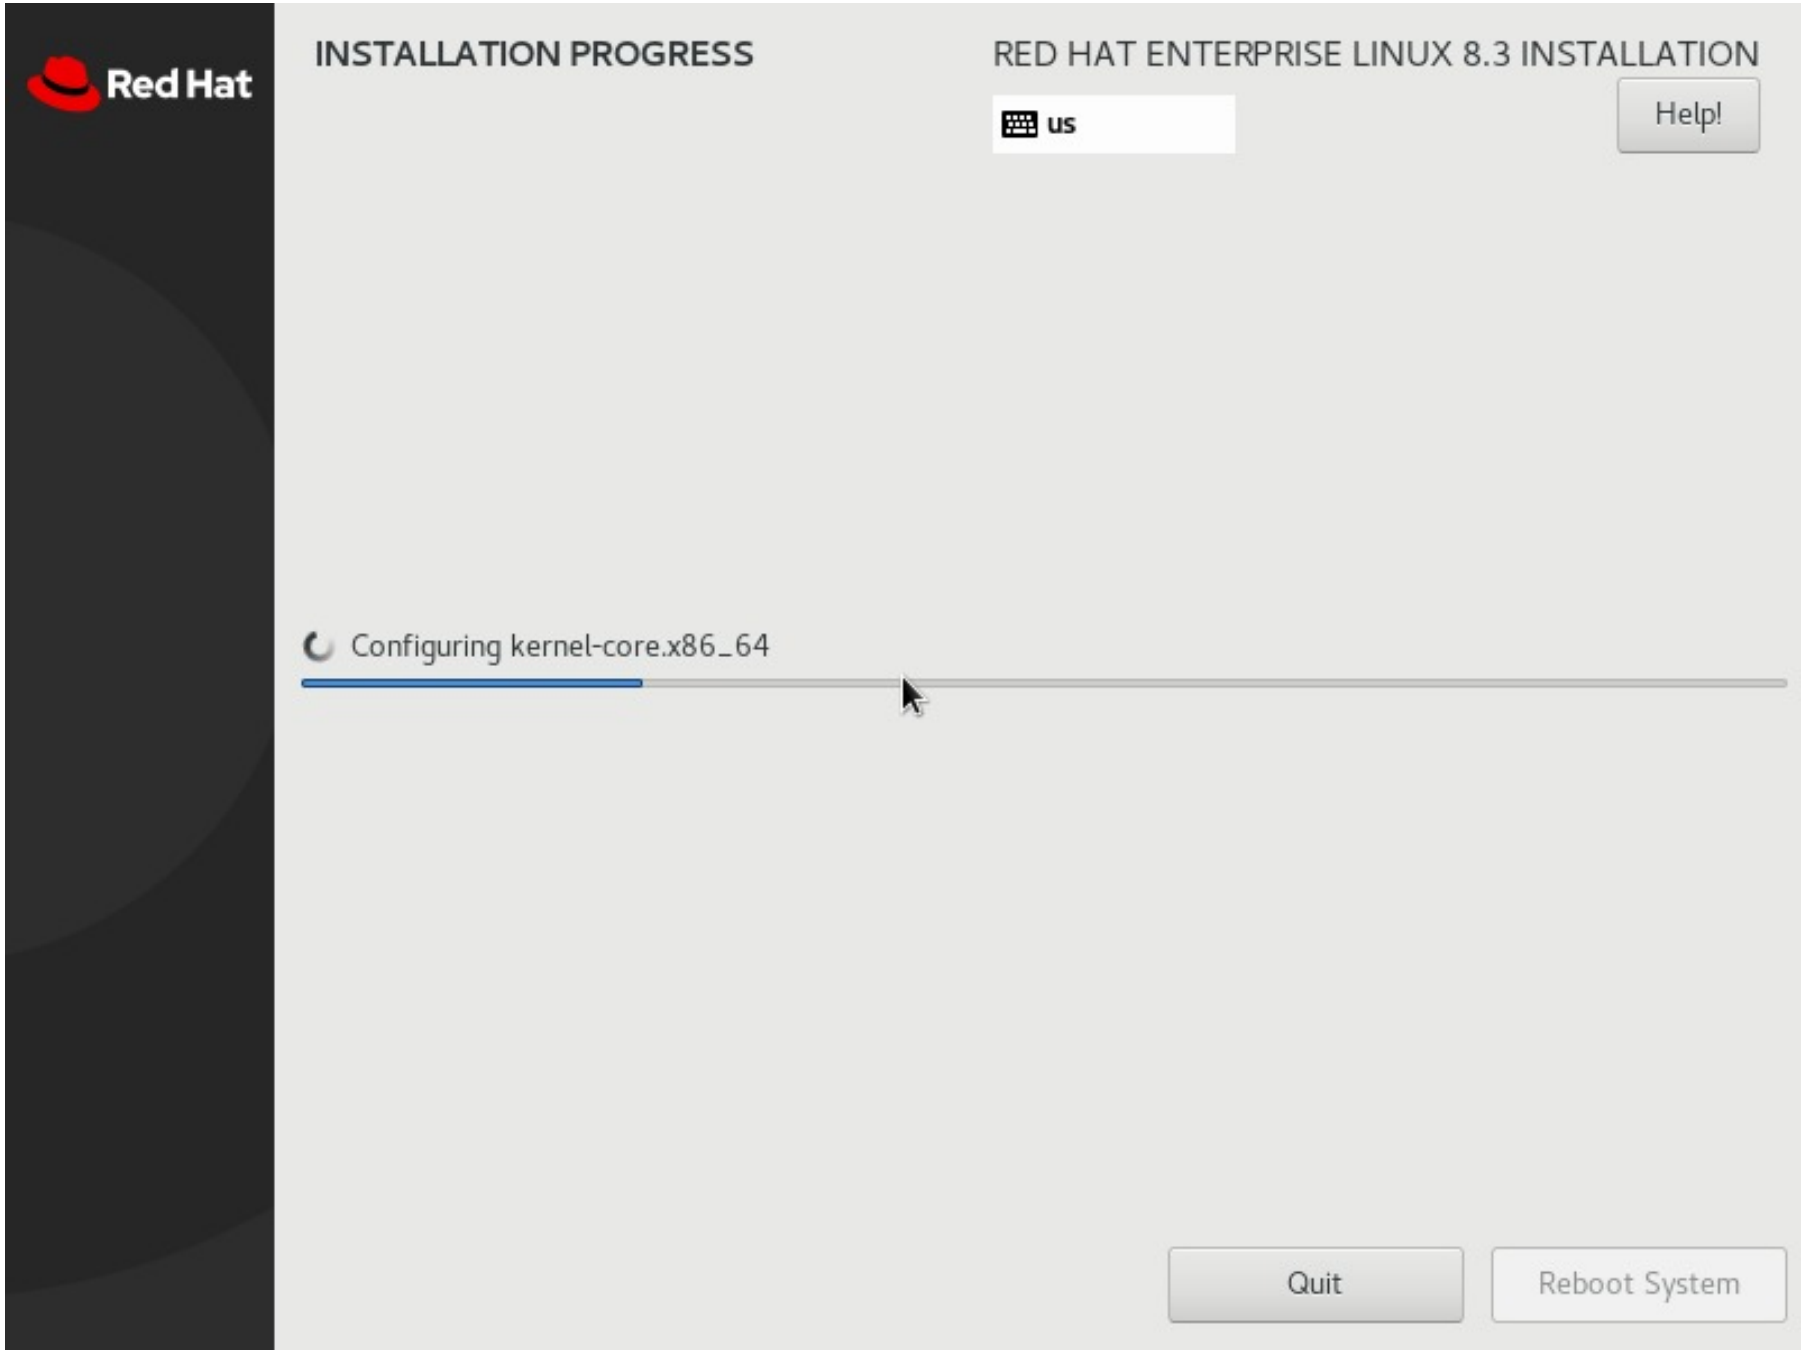

Red Hat
INSTALLATION PROGRESS
RED HAT ENTERPRISE LINUX 8.3 INSTALLATION
us
Help!
Installing flatpak-selinux.noarch (808/1363)
Quit
Reboot System

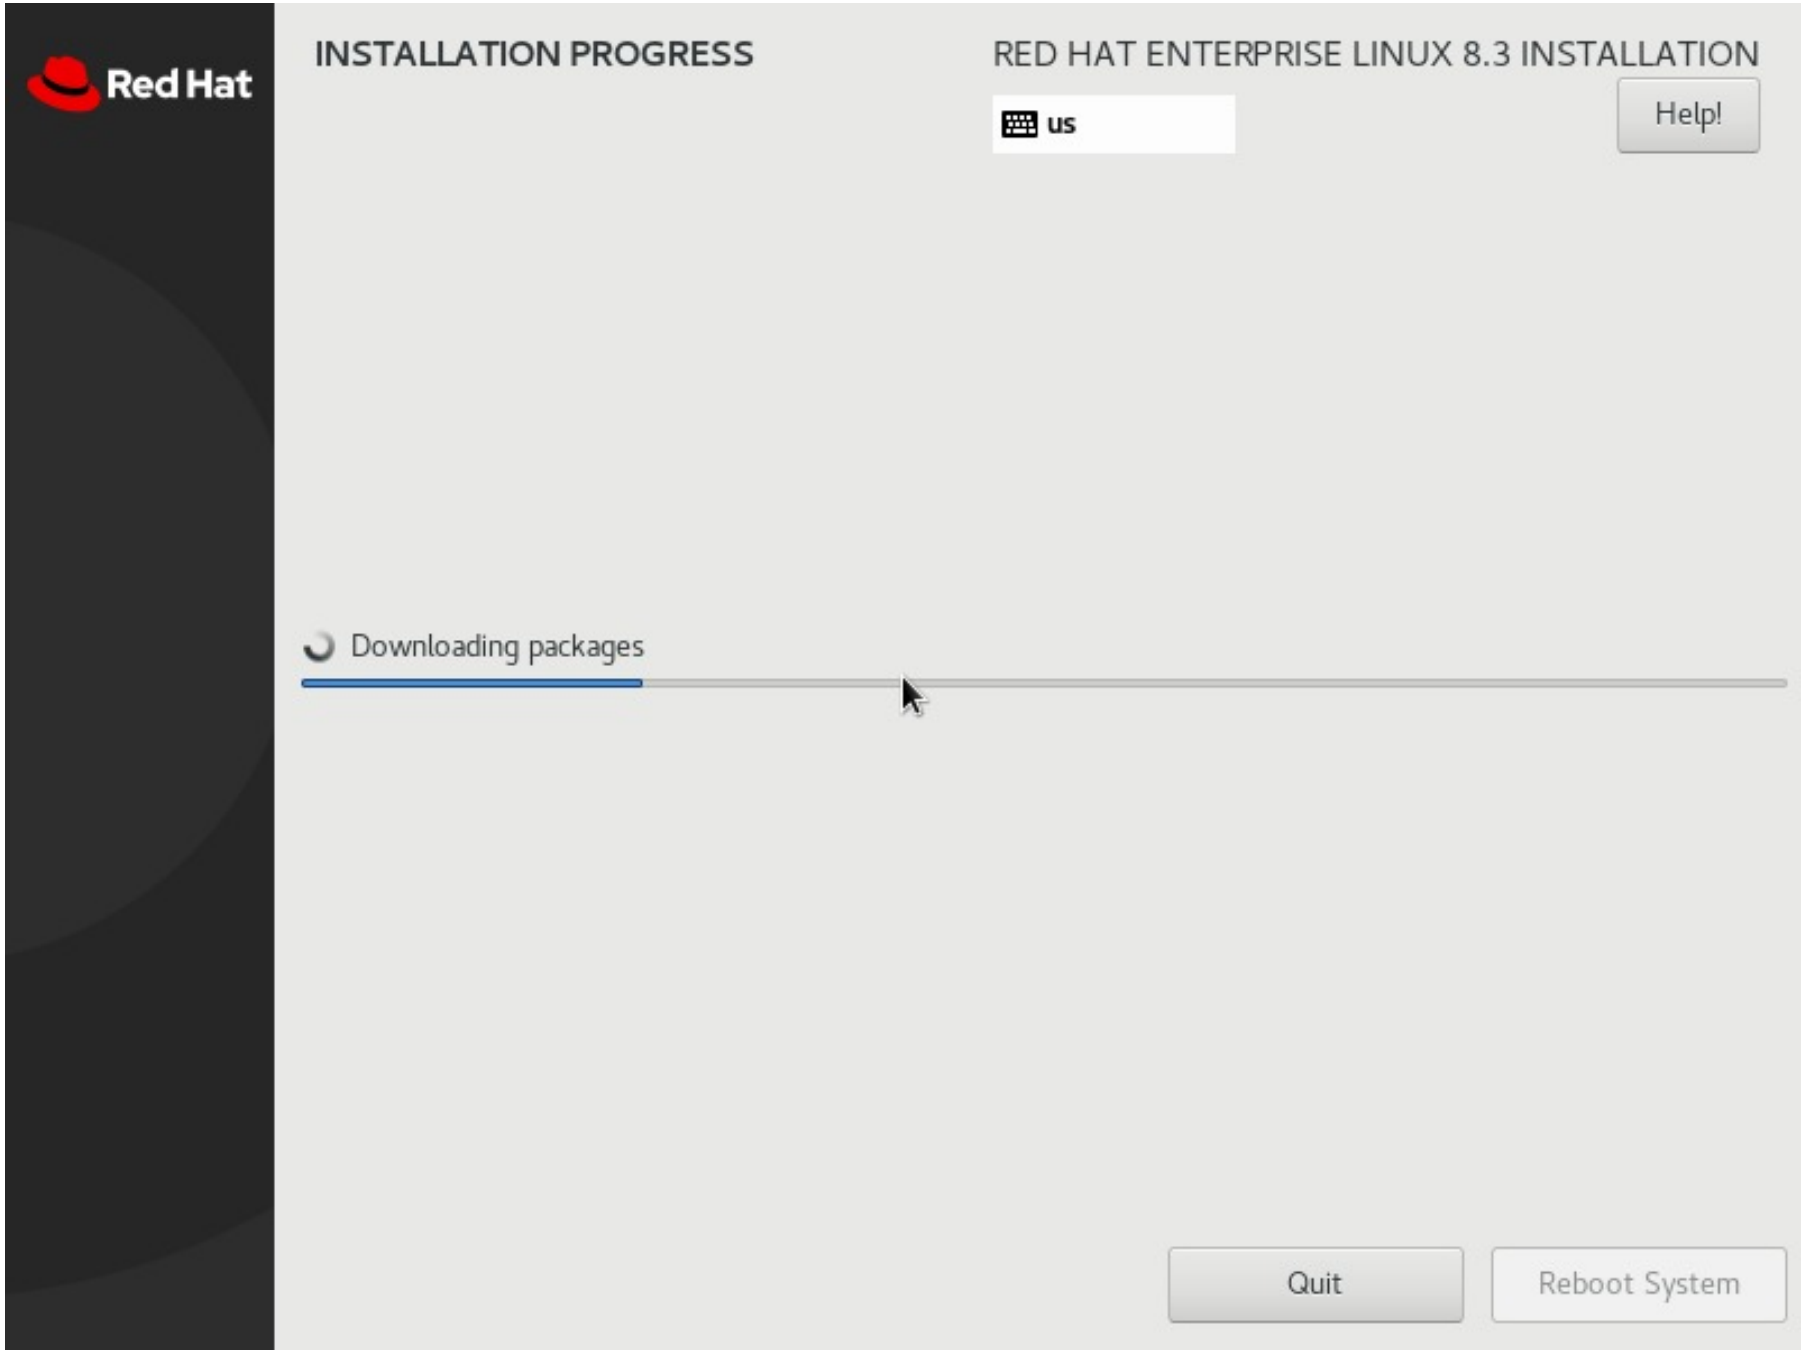

Red Hat
INSTALLATION PROGRESS
RED HAT ENTERPRISE LINUX 8.3 INSTALLATION
us
Help!
Downloading packages
Quit
Reboot System

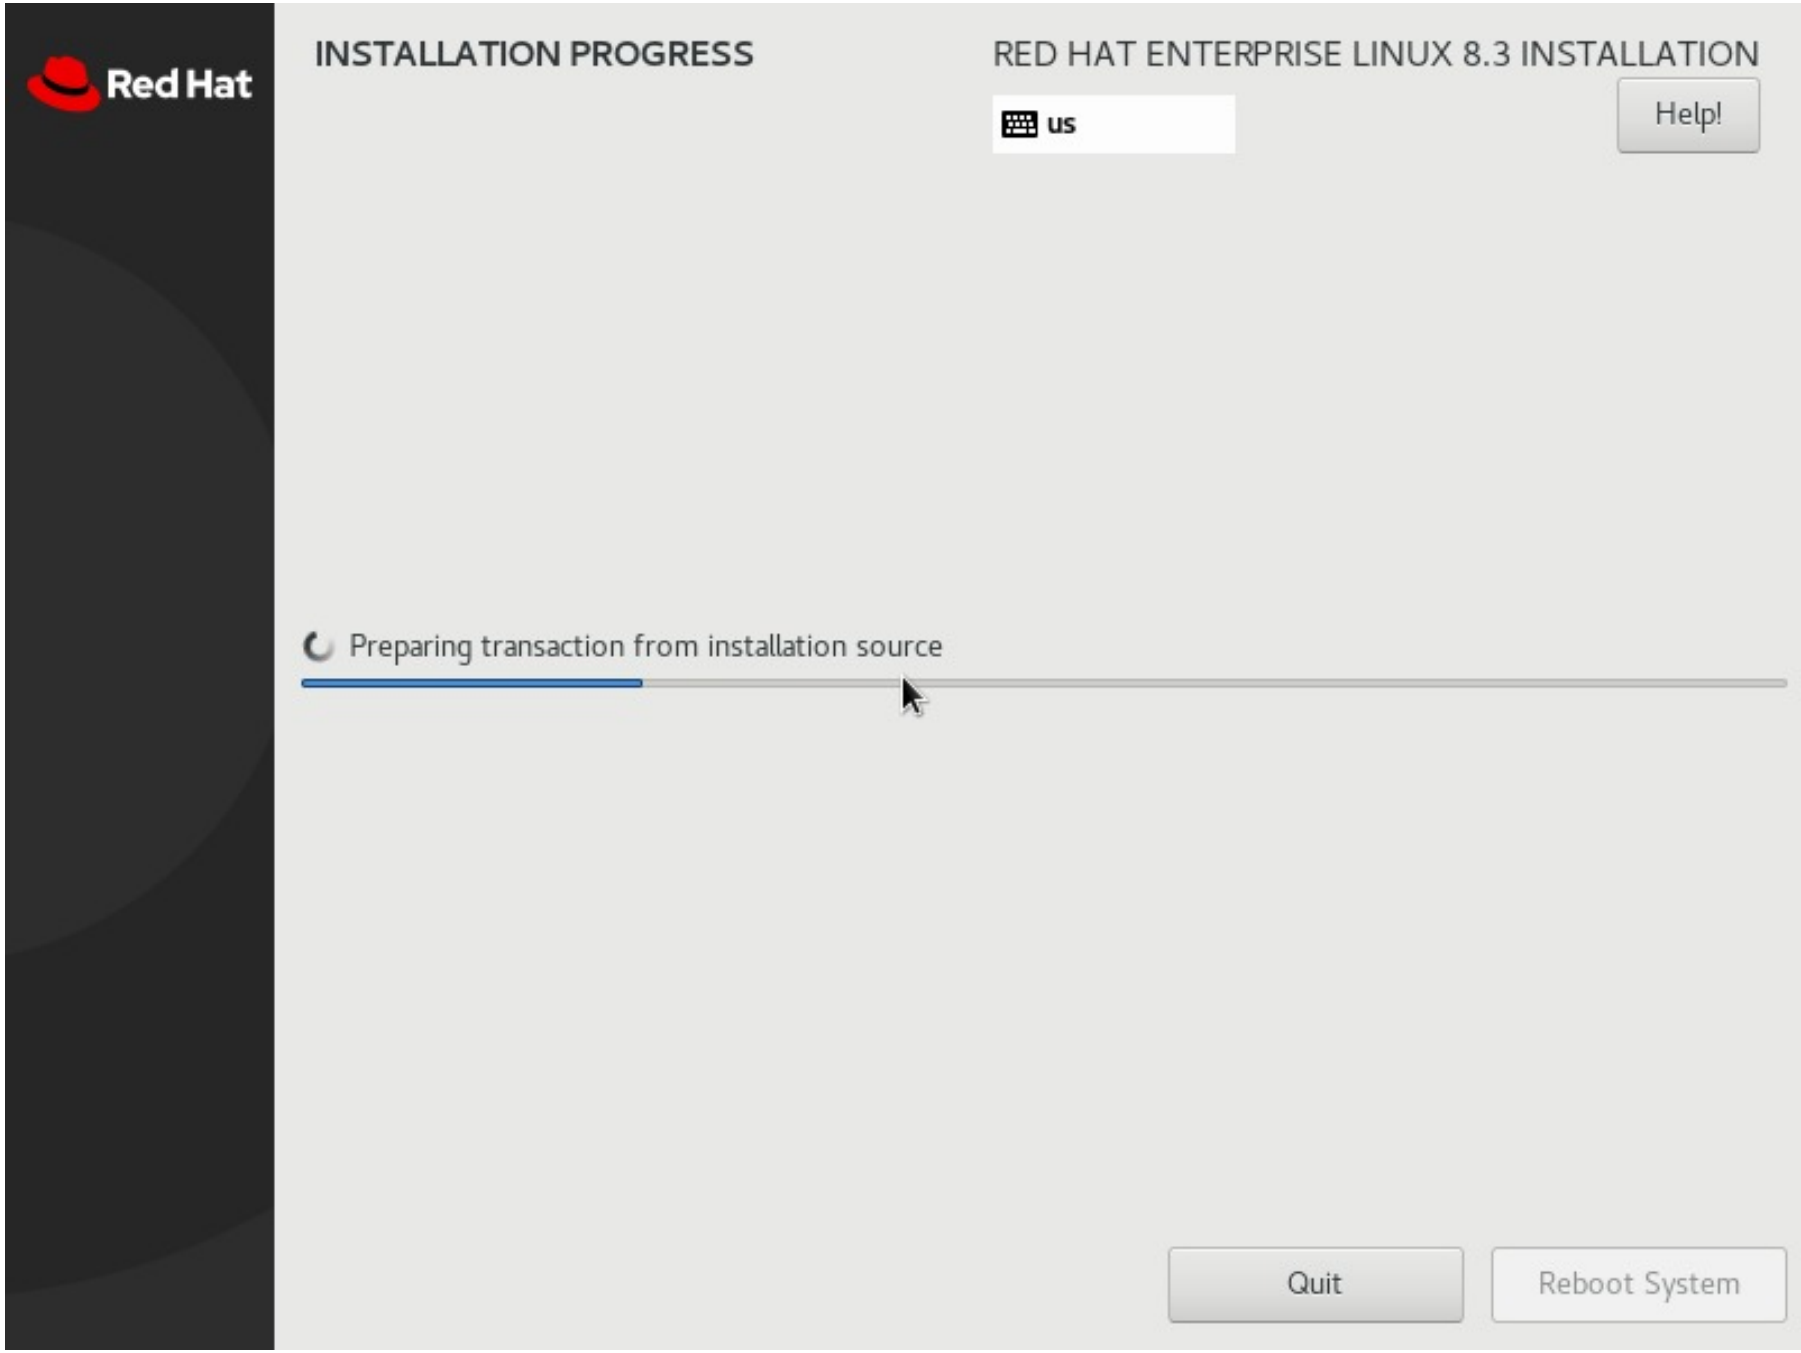

Red Hat
INSTALLATION PROGRESS
RED HAT ENTERPRISE LINUX 8.3 INSTALLATION
us
Help!
Configuring kernel-core.x86_64
Quit
Reboot System

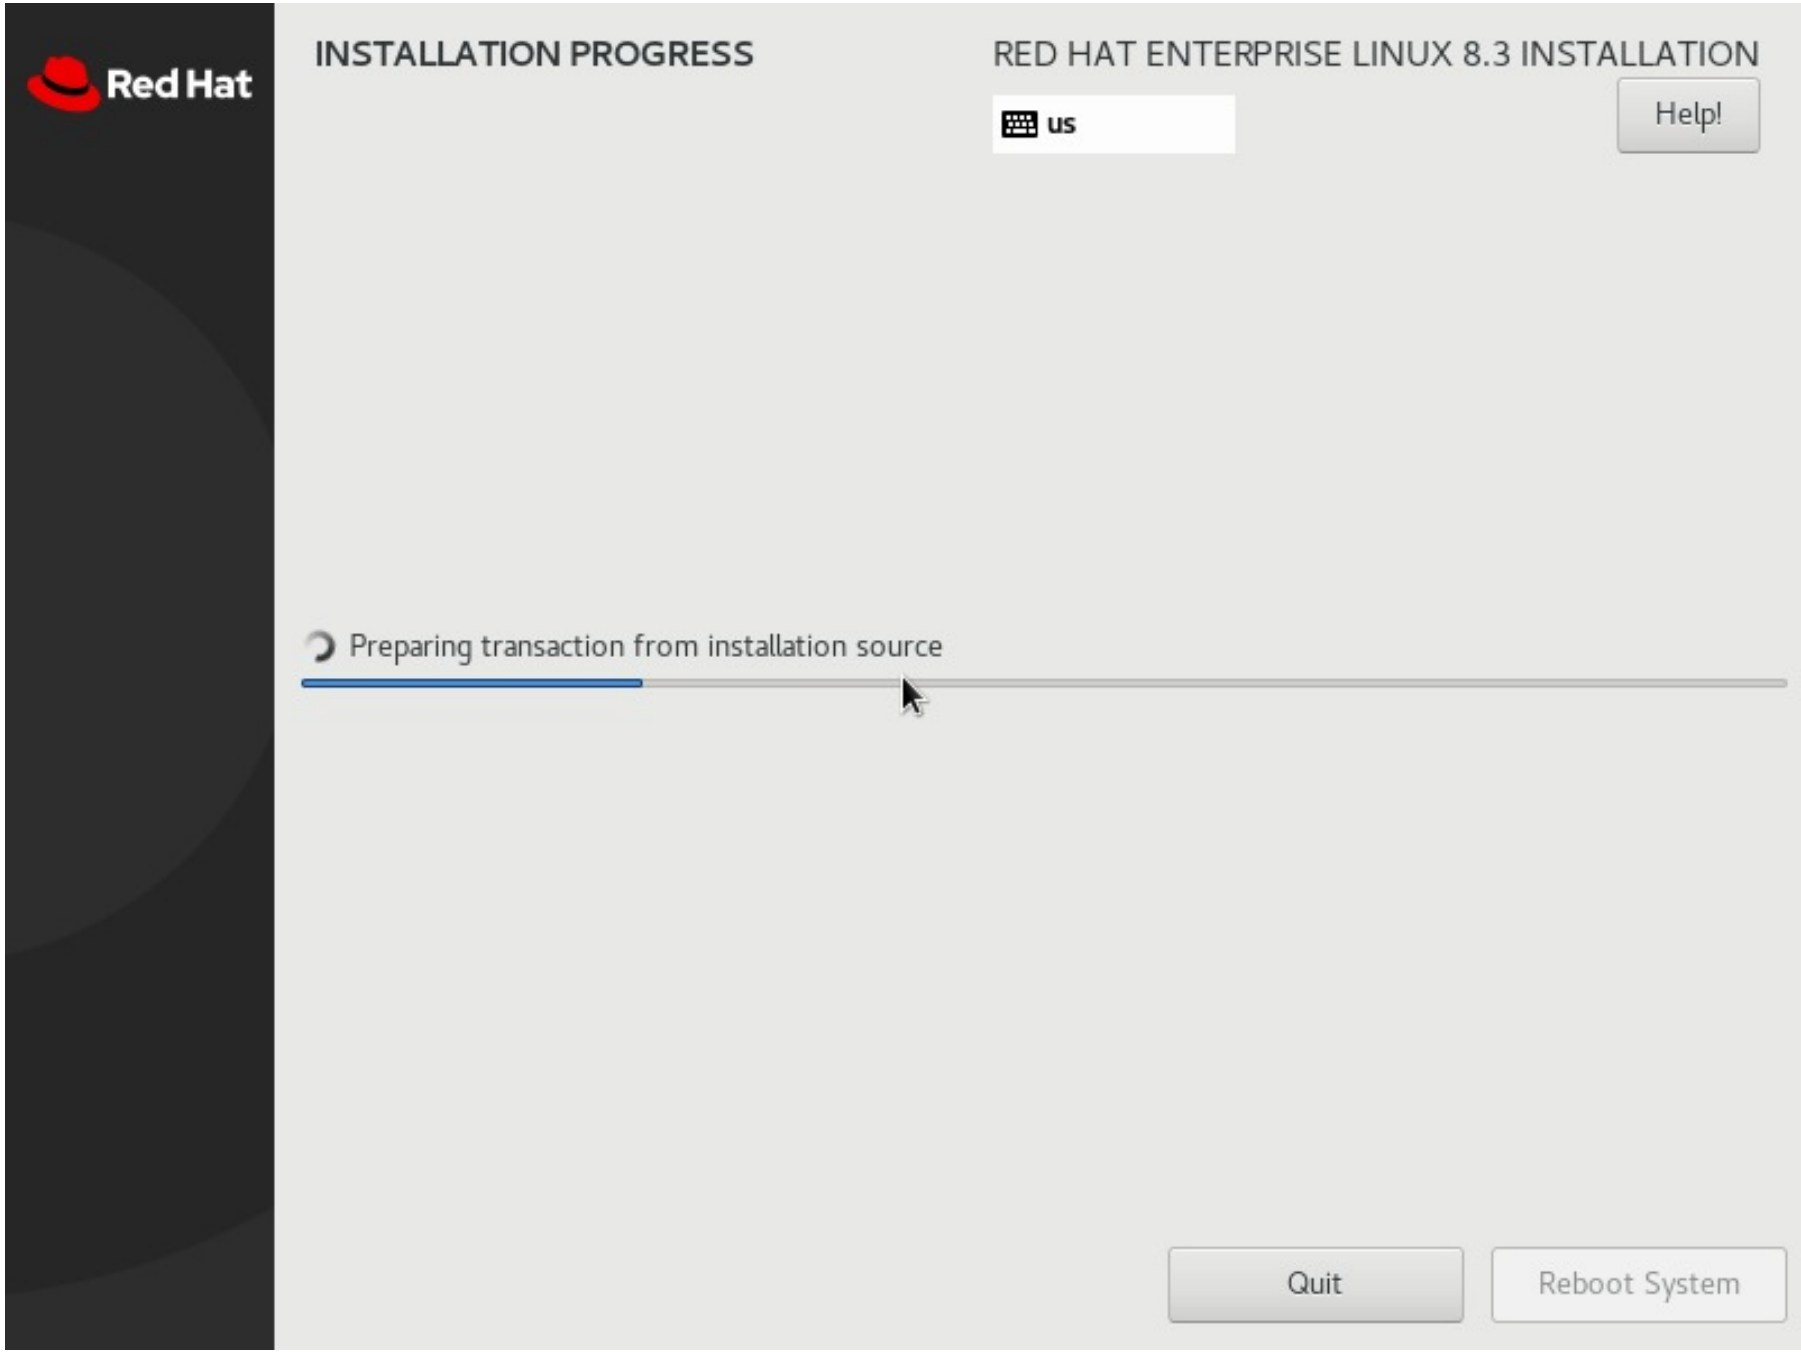

Red Hat
INSTALLATION PROGRESS
RED HAT ENTERPRISE LINUX 8.3 INSTALLATION
us
Help!
Downloading packages
Quit
Reboot System

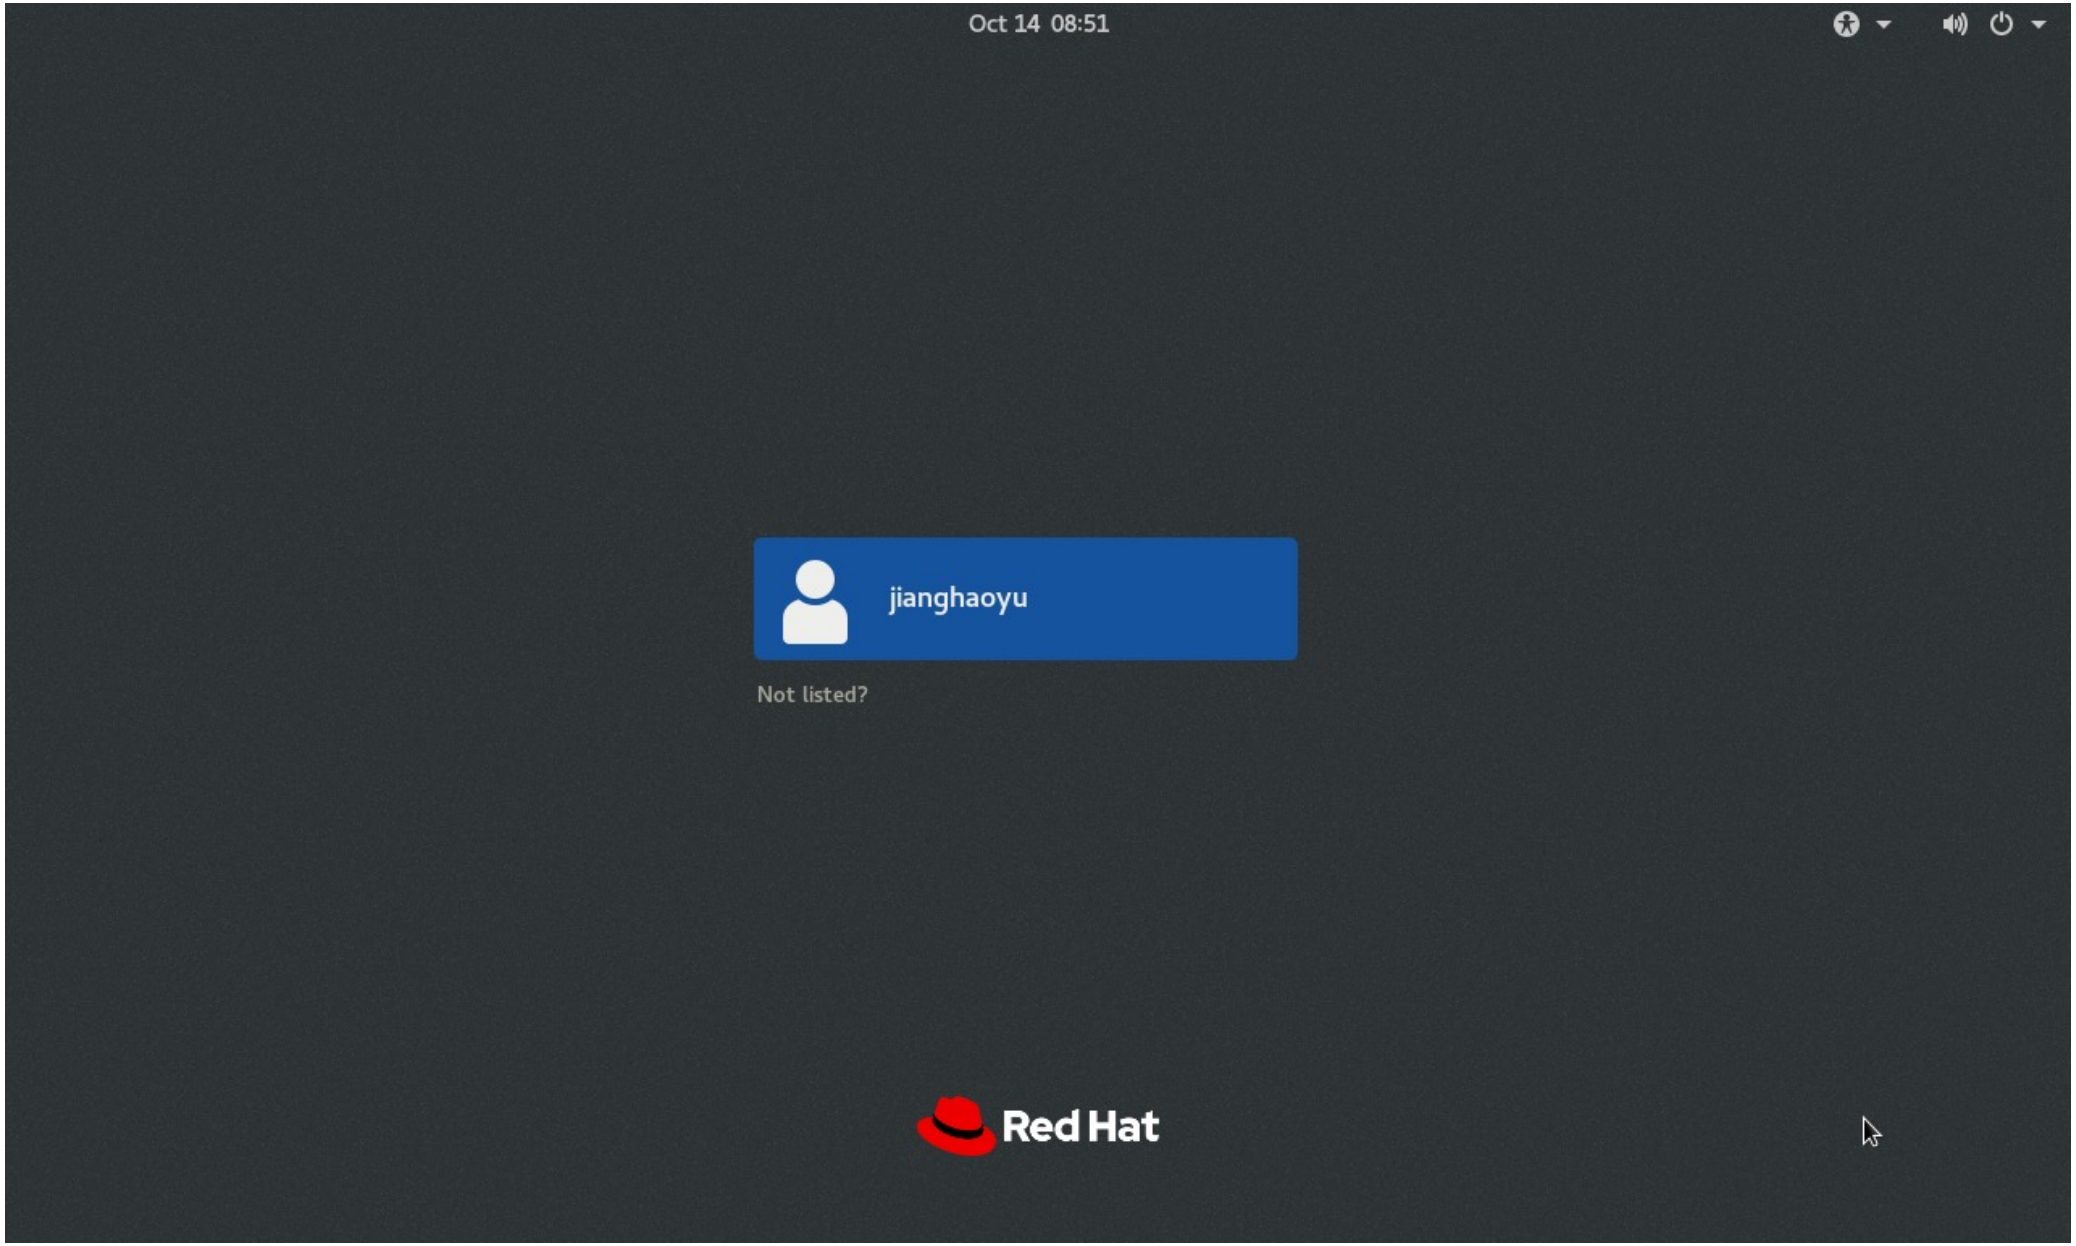

Red Hat
INSTALLATION PROGRESS
RED HAT ENTERPRISE LINUX 8.3 INSTALLATION
us
Help!
Downloading packages
Quit
Reboot System

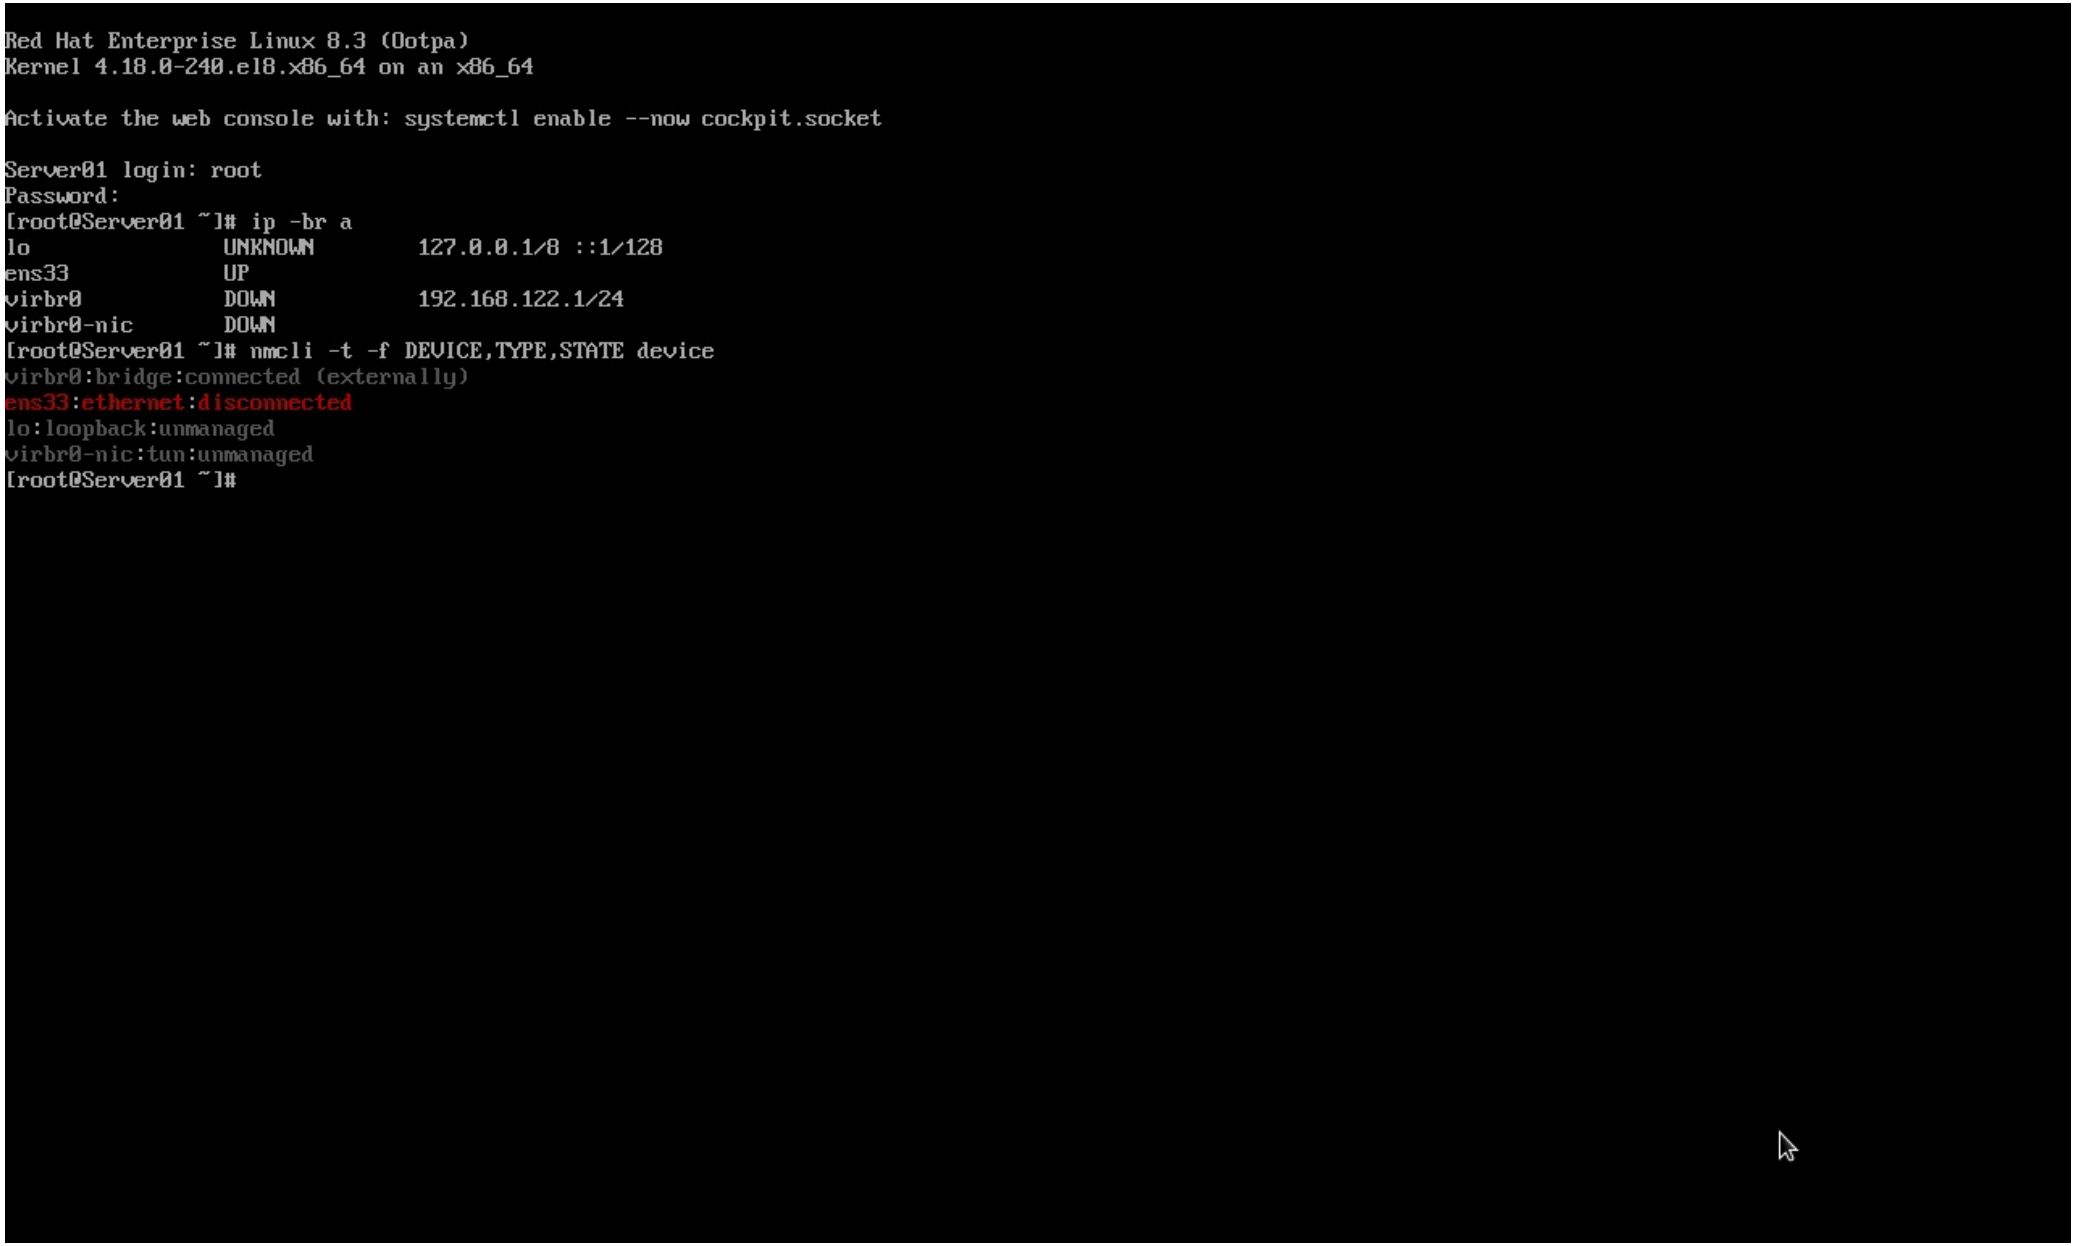

Red Hat
INSTALLATION PROGRESS
RED HAT ENTERPRISE LINUX 8.3 INSTALLATION
us
Help!
Configuring kernel-core.x86_64
Quit
Reboot System


Red Hat
INSTALLATION PROGRESS
RED HAT ENTERPRISE LINUX 8.3 INSTALLATION
us
Help!
Downloading packages
Quit
Reboot System


Red Hat
INSTALLATION PROGRESS
RED HAT ENTERPRISE LINUX 8.3 INSTALLATION
us
Help!
Preparing transaction from installation source
Quit
Reboot System


Red Hat
INSTALLATION PROGRESS
RED HAT ENTERPRISE LINUX 8.3 INSTALLATION
us
Help!
Preparing transaction from installation source
Quit
Reboot System


Oct 14 08:51
jianghaoyu
Not listed?
Red Hat


Red Hat Enterprise Linux 8.3 (Ootpa)
Kernel 4.18.0-240.el8.x86_64 on an x86_64
Activate the web console with: systemctl enable --now cockpit.socket
Server01 login: root
Password:
[root@Server01 ~]# ip -br a
lo UNKNOWN 127.0.0.1/8 ::1/128
ens33 UP
virbr0 DOWN 192.168.122.1/24
virbr0-nic DOWN
[root@Server01 ~]# nmcli -t -f DEVICE,TYPE,STATE device
virbr0:bridge:connected (externally)
ens33:ethernet:disconnected
lo:loopback:unmanaged
virbr0-nic:tun:unmanaged
[root@Server01 ~]#


Red Hat Enterprise Linux 8.3 (Ootpa)
Kernel 4.18.0-240.el8.x86_64 on an x86_64
Activate the web console with: systemctl enable --now cockpit.socket
Server01 login: root
Password:
[root@Server01 ~]# _


Red Hat Enterprise Linux 8.3 (Ootpa)
Kernel 4.18.0-240.el8.x86_64 on an x86_64
Activate the web console with: systemctl enable --now cockpit.socket
Server01 login:

```
Red Hat Enterprise Linux 8.3 (Ootpa)
Kernel 4.18.0-240.el8.x86_64 on an x86_64

Activate the web console with: systemctl enable --now cockpit.socket

Server01 login: root
Password:
[root@Server01 ~]# ip -br a
lo               UNKNOWN        127.0.0.1/8 ::1/128
ens33            UP
virbr0           DOWN           192.168.122.1/24
virbr0-nic       DOWN
[root@Server01 ~]# nmcli -t -f DEVICE,TYPE,STATE device
virbr0:bridge:connected (externally)
ens33:ethernet:disconnected
lo:loopback:unmanaged
virbr0-nic:tun:unmanaged
[root@Server01 ~]# IFwhoami
bash: IFwhoami: command not found...
[root@Server01 ~]# cat whoami
cat: whoami: No such file or directory
[root@Server01 ~]# nmcli connection delete static0
Error: unknown connection 'static0'.
Error: cannot delete unknown connection(s): 'static0'.
[root@Server01 ~]# nmcli connection delete ens33
Connection 'ens33' (d02cd181-efa8-4065-9e8b-e1a72013b69b) successfully deleted.
[root@Server01 ~]# nmcli connection add type ethernet ifname ens33 con-name static0 ipv4.method manual ipv4.addresses 192.168.10.1/24 ipv4.gateway 192.168.10.25
4 ipv4.dns 192.168.10.254 connection.autoconnect yes
Connection 'static0' (3362951a-8b3a-49c9-9103-7202c107eace) successfully added.
[root@Server01 ~]# nmcli connection up static0
Connection successfully activated (D-Bus active path: /org/freedesktop/NetworkManager/ActiveConnection/4)
[root@Server01 ~]# ip addr show ens33
2: ens33: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc fq_codel state UP group default qlen 1000
    link/ether 00:0c:29:d4:13:1d brd ff:ff:ff:ff:ff:ff
    inet 192.168.10.1/24 brd 192.168.10.255 scope global noprefixroute ens33
       valid_lft forever preferred_lft forever
    inet6 fe80::fd1b:b543:c4a8:277b/64 scope link noprefixroute
       valid_lft forever preferred_lft forever
[root@Server01 ~]# systemctl enable --now sshd
[root@Server01 ~]# ping -c 2 -W 2 192.168.10.254
PING 192.168.10.254 (192.168.10.254) 56(84) bytes of data.
64 bytes from 192.168.10.254: icmp_seq=1 ttl=128 time=0.294 ms
64 bytes from 192.168.10.254: icmp_seq=2 ttl=128 time=0.309 ms

--- 192.168.10.254 ping statistics ---
2 packets transmitted, 2 received, 0% packet loss, time 9ms
rtt min/avg/max/mdev = 0.294/0.301/0.309/0.018 ms
[root@Server01 ~]#
```

```
Server01 network ens33 static 192.168.10.1

Server01
lo               UNKNOWN        127.0.0.1/8 ::1/128
ens33            UP             192.168.10.1/24 fe80::fd1b:b543:c4a8:277b/64
virbr0           DOWN           192.168.122.1/24
virbr0-nic       DOWN
```

Server01 BIND named.conf (authoritative)

```
options {
    listen-on port 53 { 127.0.0.1; 192.168.10.1; };
    listen-on-v6 { none; };
    directory "/var/named";
    allow-query { localhost; 192.168.10.0/24; };
    recursion yes;
    allow-recursion { localhost; 192.168.10.0/24; };
    forwarders { 8.8.8.8; 1.1.1.1; };
    dnssec-validation no;
};
zone "." IN { type hint; file "named.ca"; };
zone "project8.lab" IN { type master; file "project8.lab.zone"; allow-transfer { 192.168.10.2; }; notify yes; };
zone "10.168.192.in-addr.arpa" IN { type master; file "10.168.192.rev"; allow-transfer { 192.168.10.2; }; };
```

Server01 zone project8.lab

```
$TTL 86400
@ IN SOA Server01.project8.lab. root.project8.lab. ( 2026101401 3600 900 604800 86400 )
@ IN NS Server01.project8.lab.
@ IN NS Server02.project8.lab.
@ IN A 192.168.10.1
Server01 IN A 192.168.10.1
Server02 IN A 192.168.10.2
Client1 IN A 192.168.10.11
gateway IN A 192.168.10.254
www IN A 192.168.10.1
```

Server01 reverse zone 10.168.192.in-addr.arpa

```
$TTL 86400
@ IN SOA Server01.project8.lab. root.project8.lab. ( 2026101401 3600 900 604800 86400 )
@ IN NS Server01.project8.lab.
@ IN NS Server02.project8.lab.
1 IN PTR Server01.project8.lab.
2 IN PTR Server02.project8.lab.
11 IN PTR Client1.project8.lab.
254 IN PTR gateway.project8.lab.
```

Server01 dig verification

```
192.168.10.1
192.168.10.1
Server01.project8.lab.
192.168.10.11
active
udp    UNCONN   0        0                0.0.0.0:5353          0.0.0.0:*
udp    UNCONN   0        0           192.168.10.1:53            0.0.0.0:*
udp    UNCONN   0        0              127.0.0.1:53            0.0.0.0:*
udp    UNCONN   0        0           192.168.122.1:53           0.0.0.0:*
udp    UNCONN   0        0                   [::]:5353             [::]:*
tcp    LISTEN   0        10          192.168.10.1:53            0.0.0.0:*
tcp    LISTEN   0        10             127.0.0.1:53            0.0.0.0:*
tcp    LISTEN   0        32          192.168.122.1:53           0.0.0.0:*
```

Host as Client3 nslookup -> Server01

```
=== nslookup Server01.project8.lab 192.168.10.1 ===
□□□:  Server01.project8.lab
Address:  192.168.10.1

□□:    Server01.project8.lab
Address:  192.168.10.1

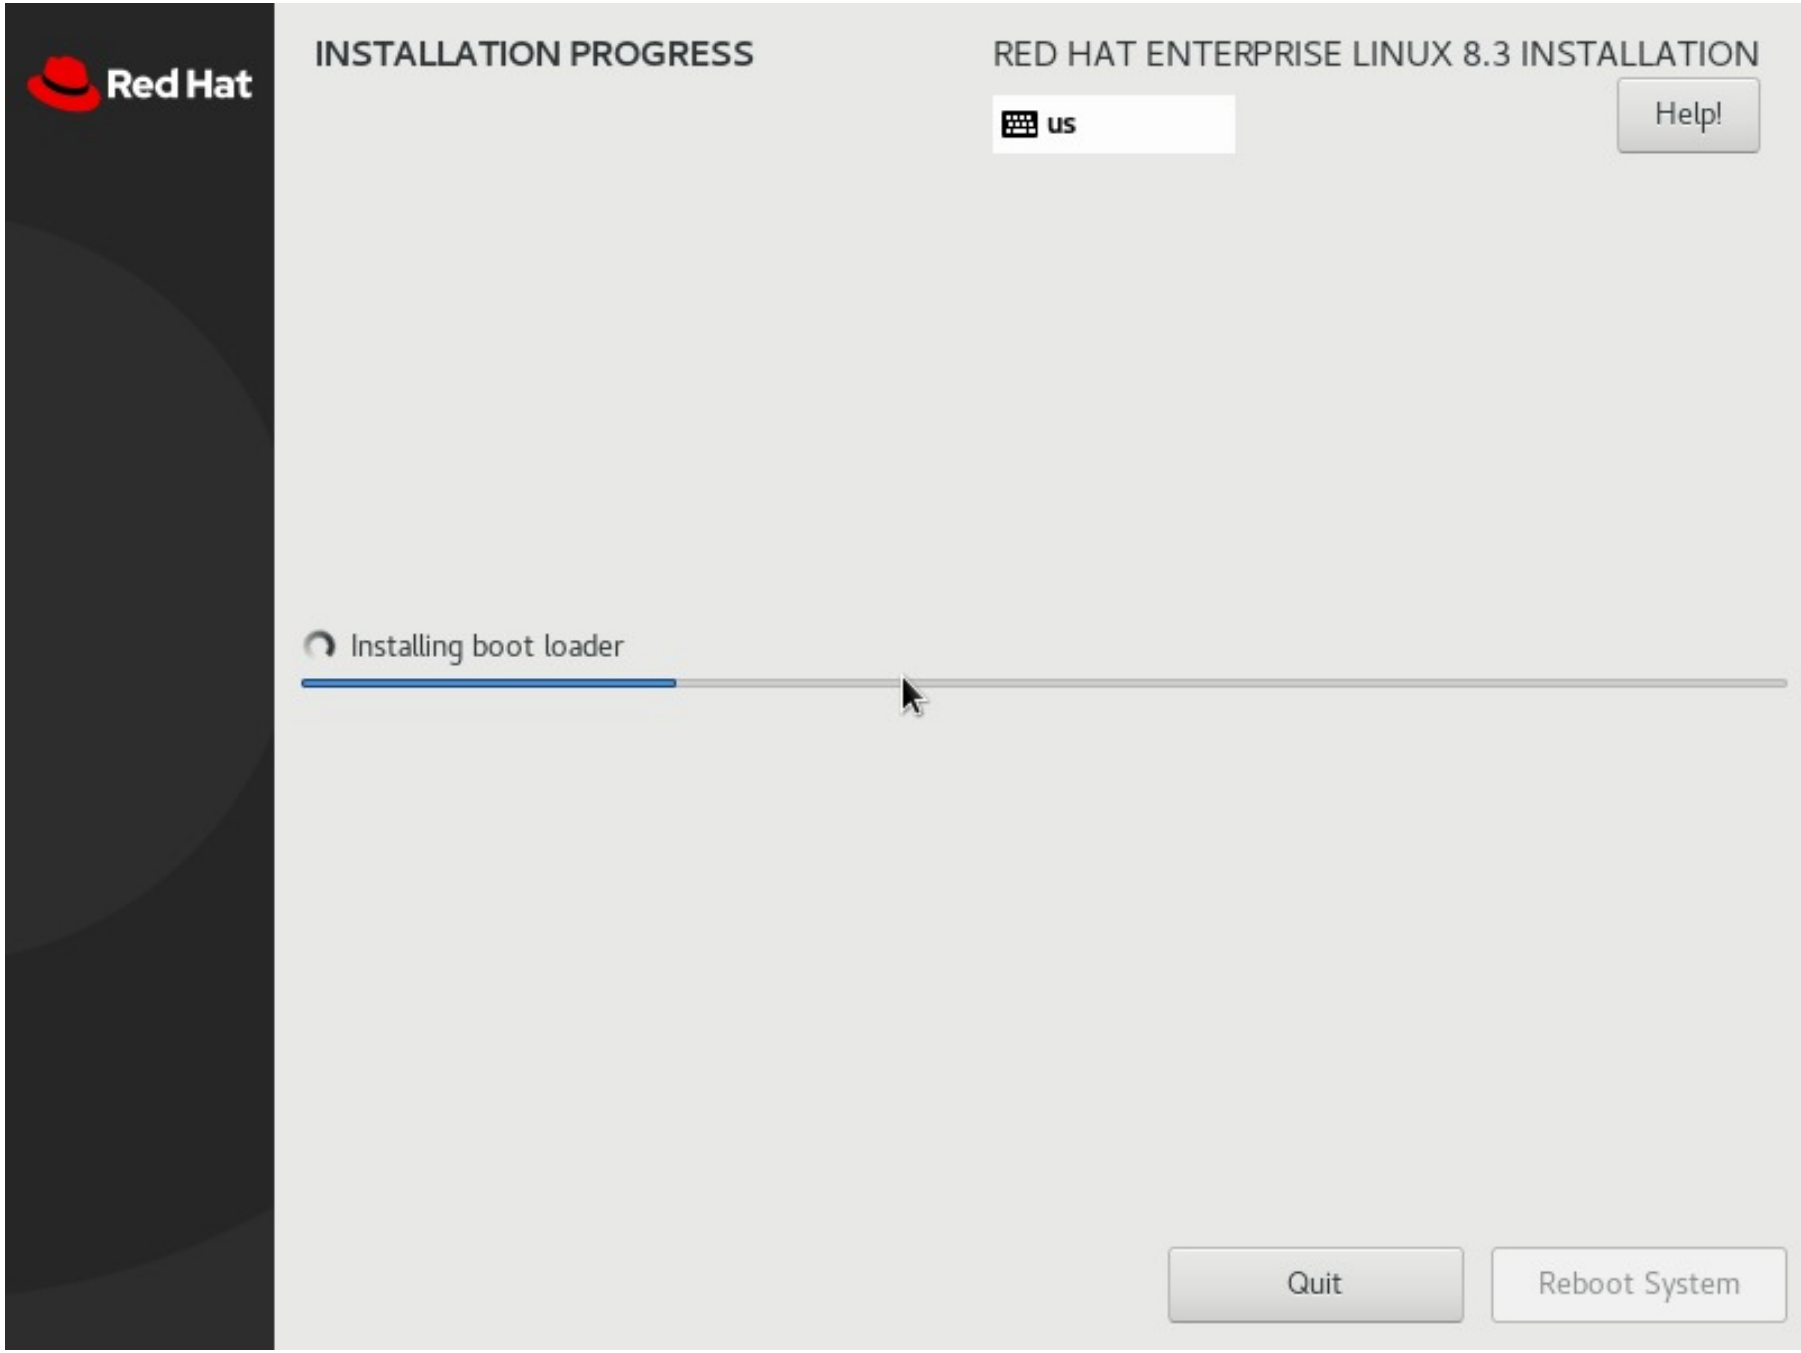

=== nslookup www.project8.lab 192.168.10.1 ===
□□□:  Server01.project8.lab
Address:  192.168.10.1

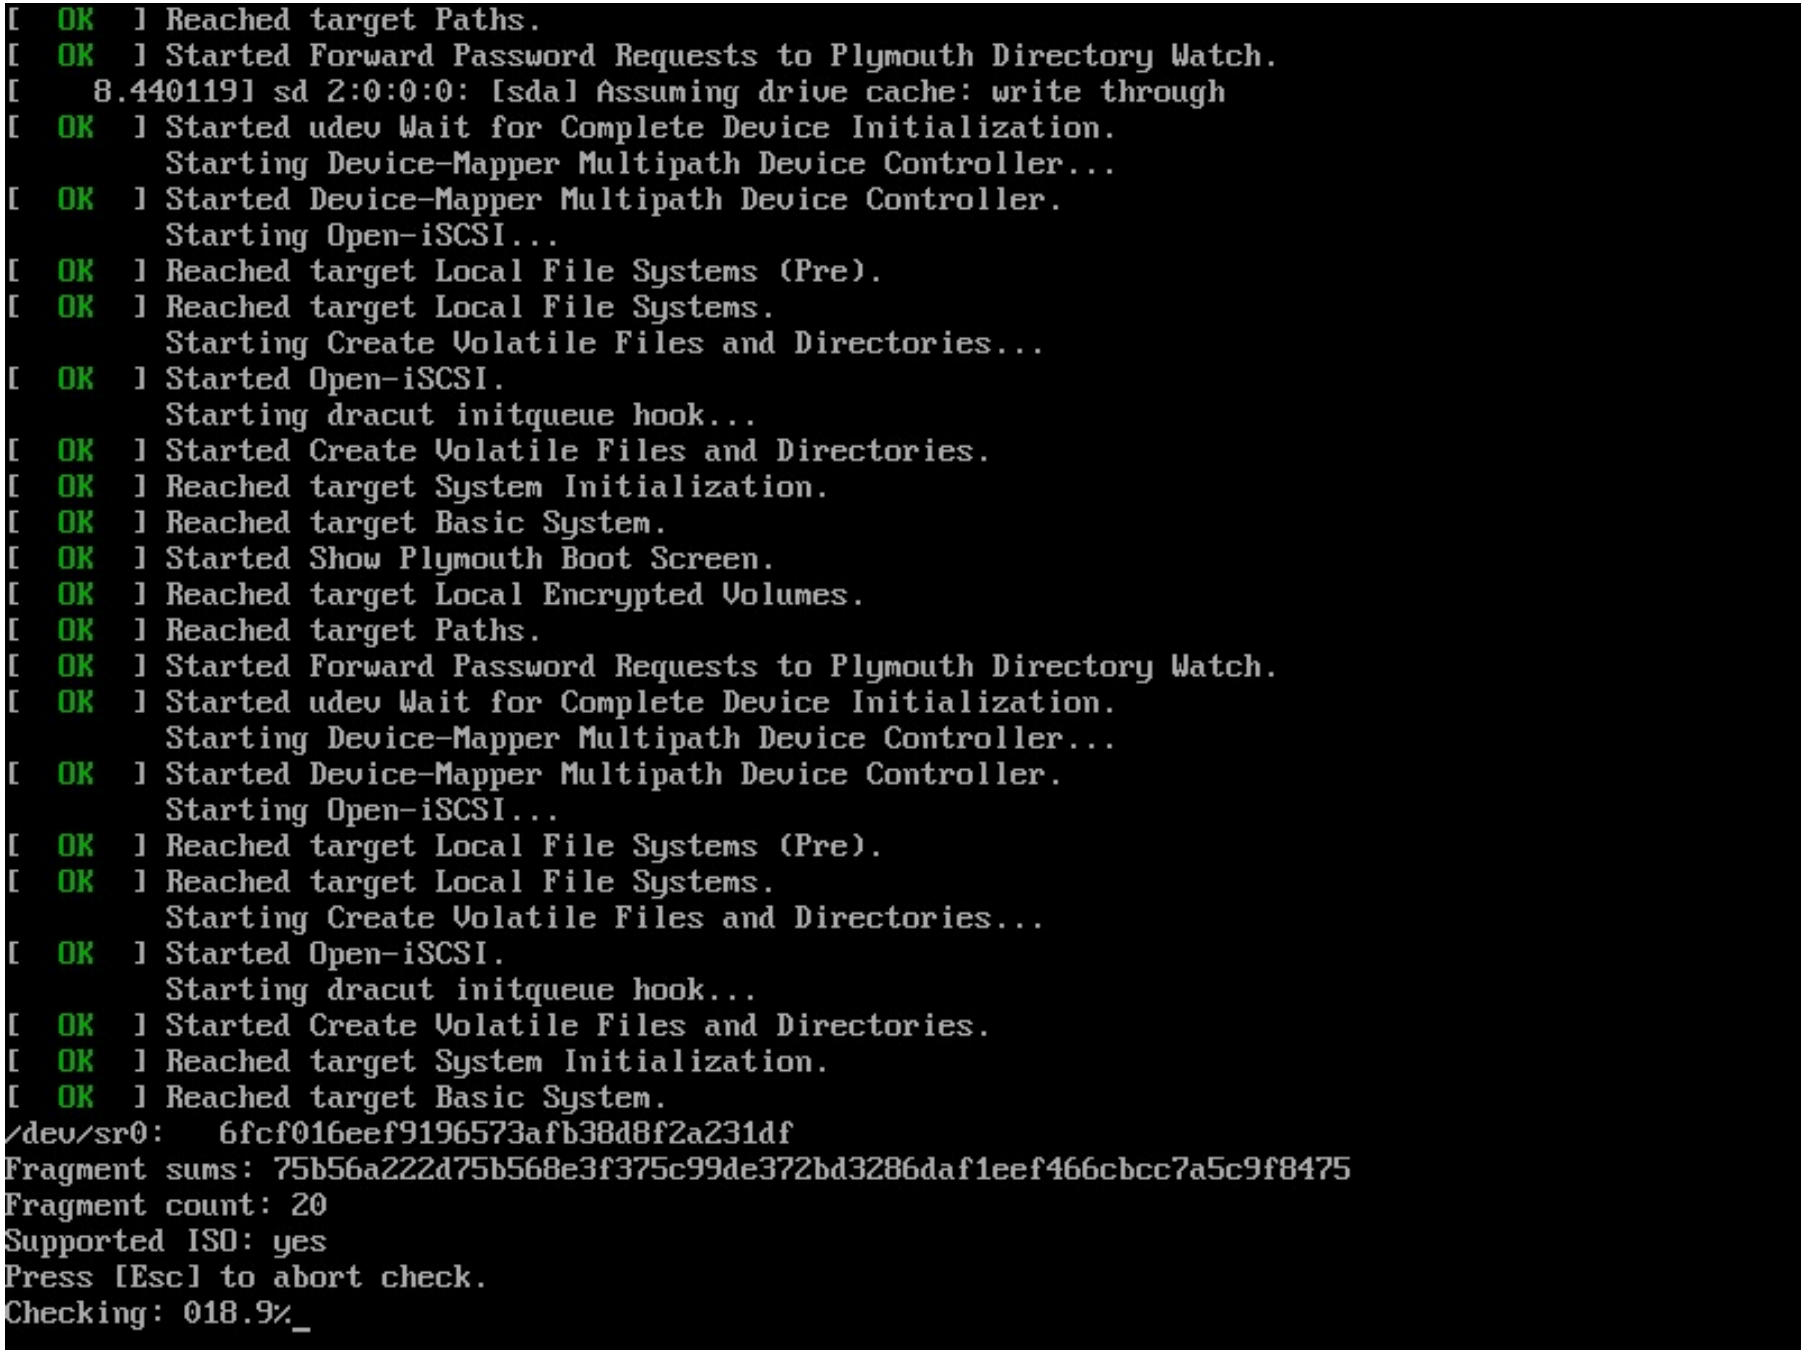
□□:    www.project8.lab
Address:  192.168.10.1

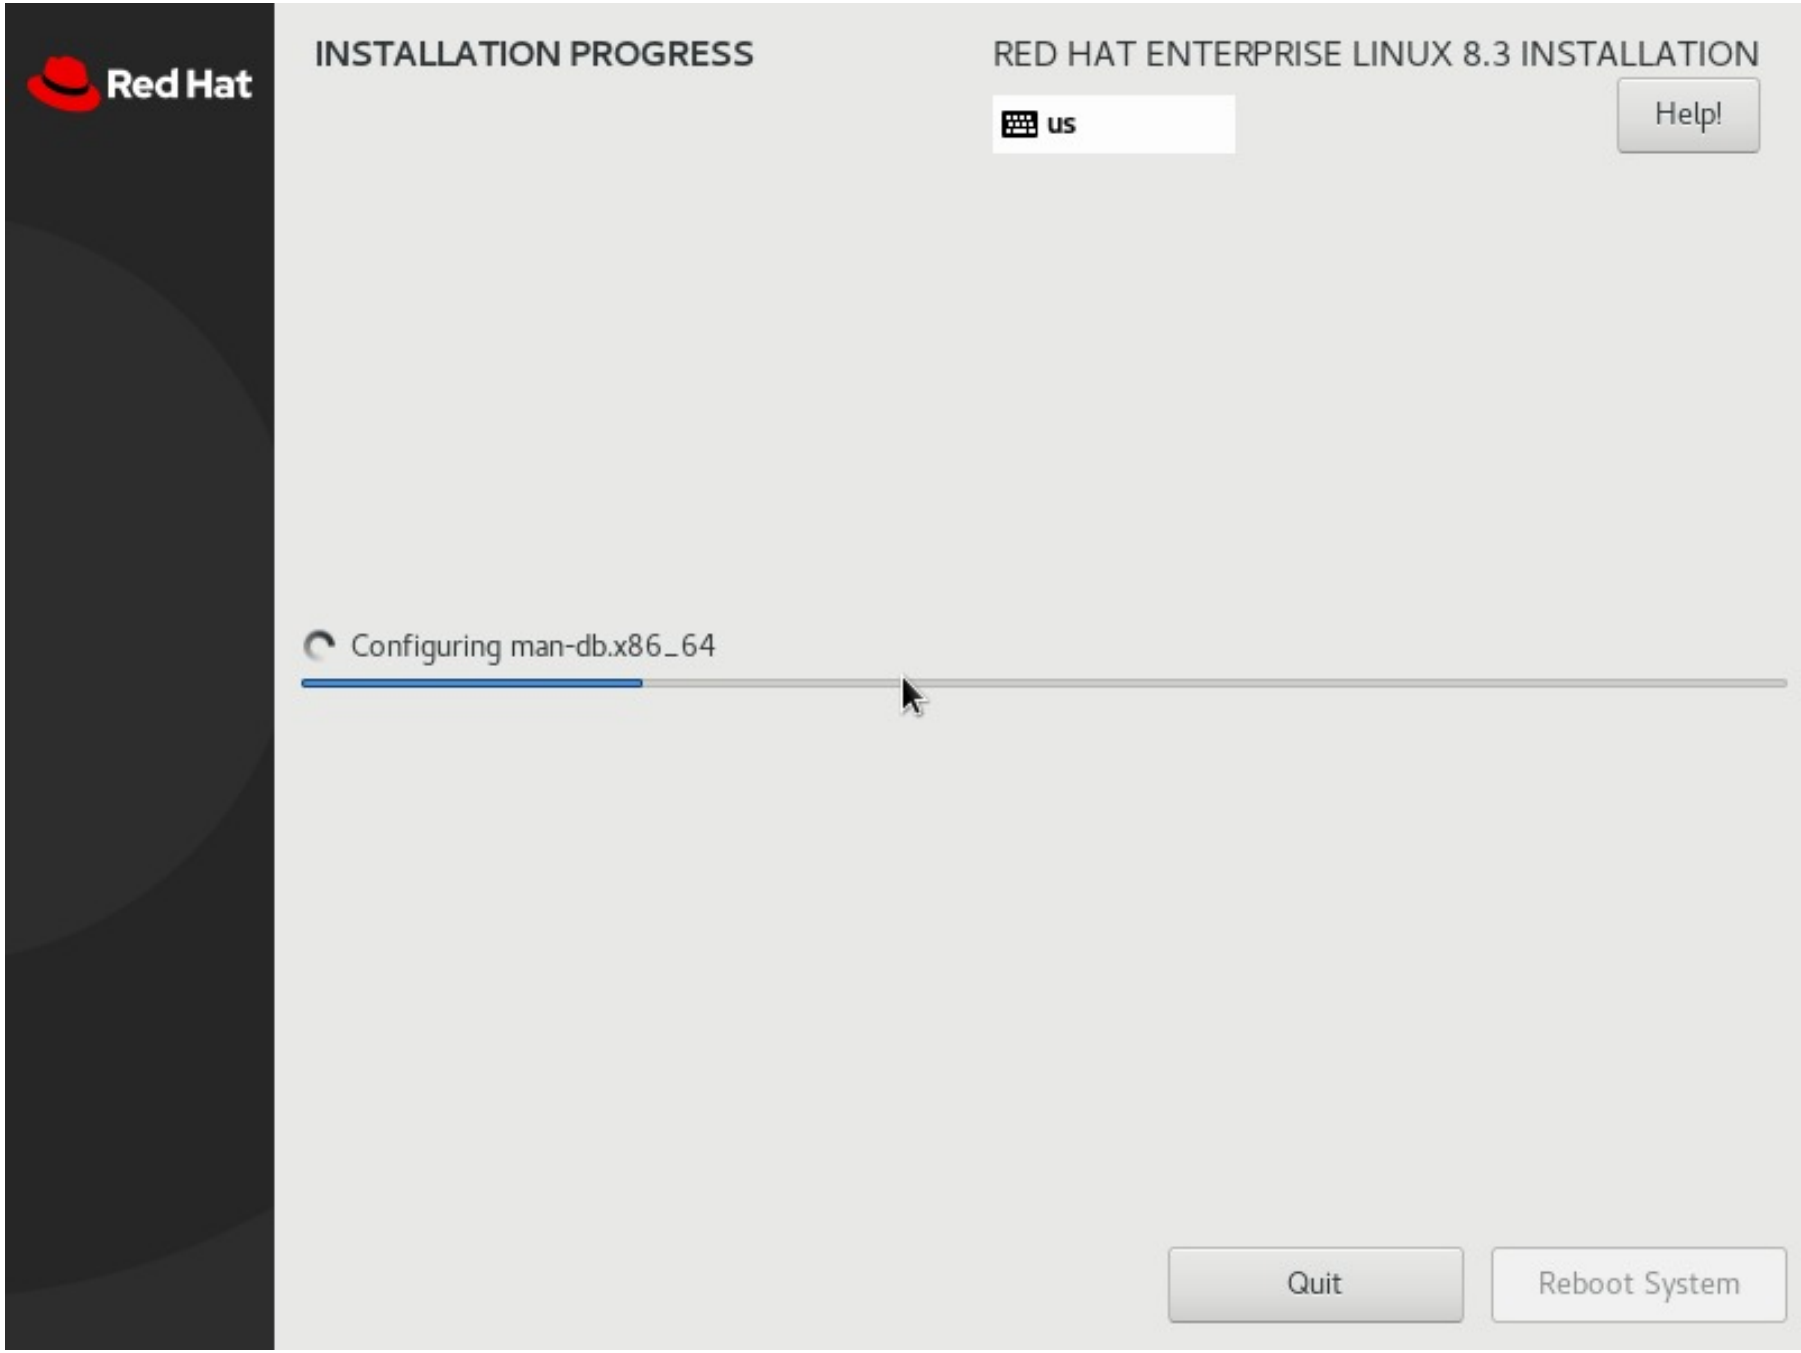

=== nslookup Client1.project8.lab 192.168.10.1 ===
□□□:  Server01.project8.lab
Address:  192.168.10.1

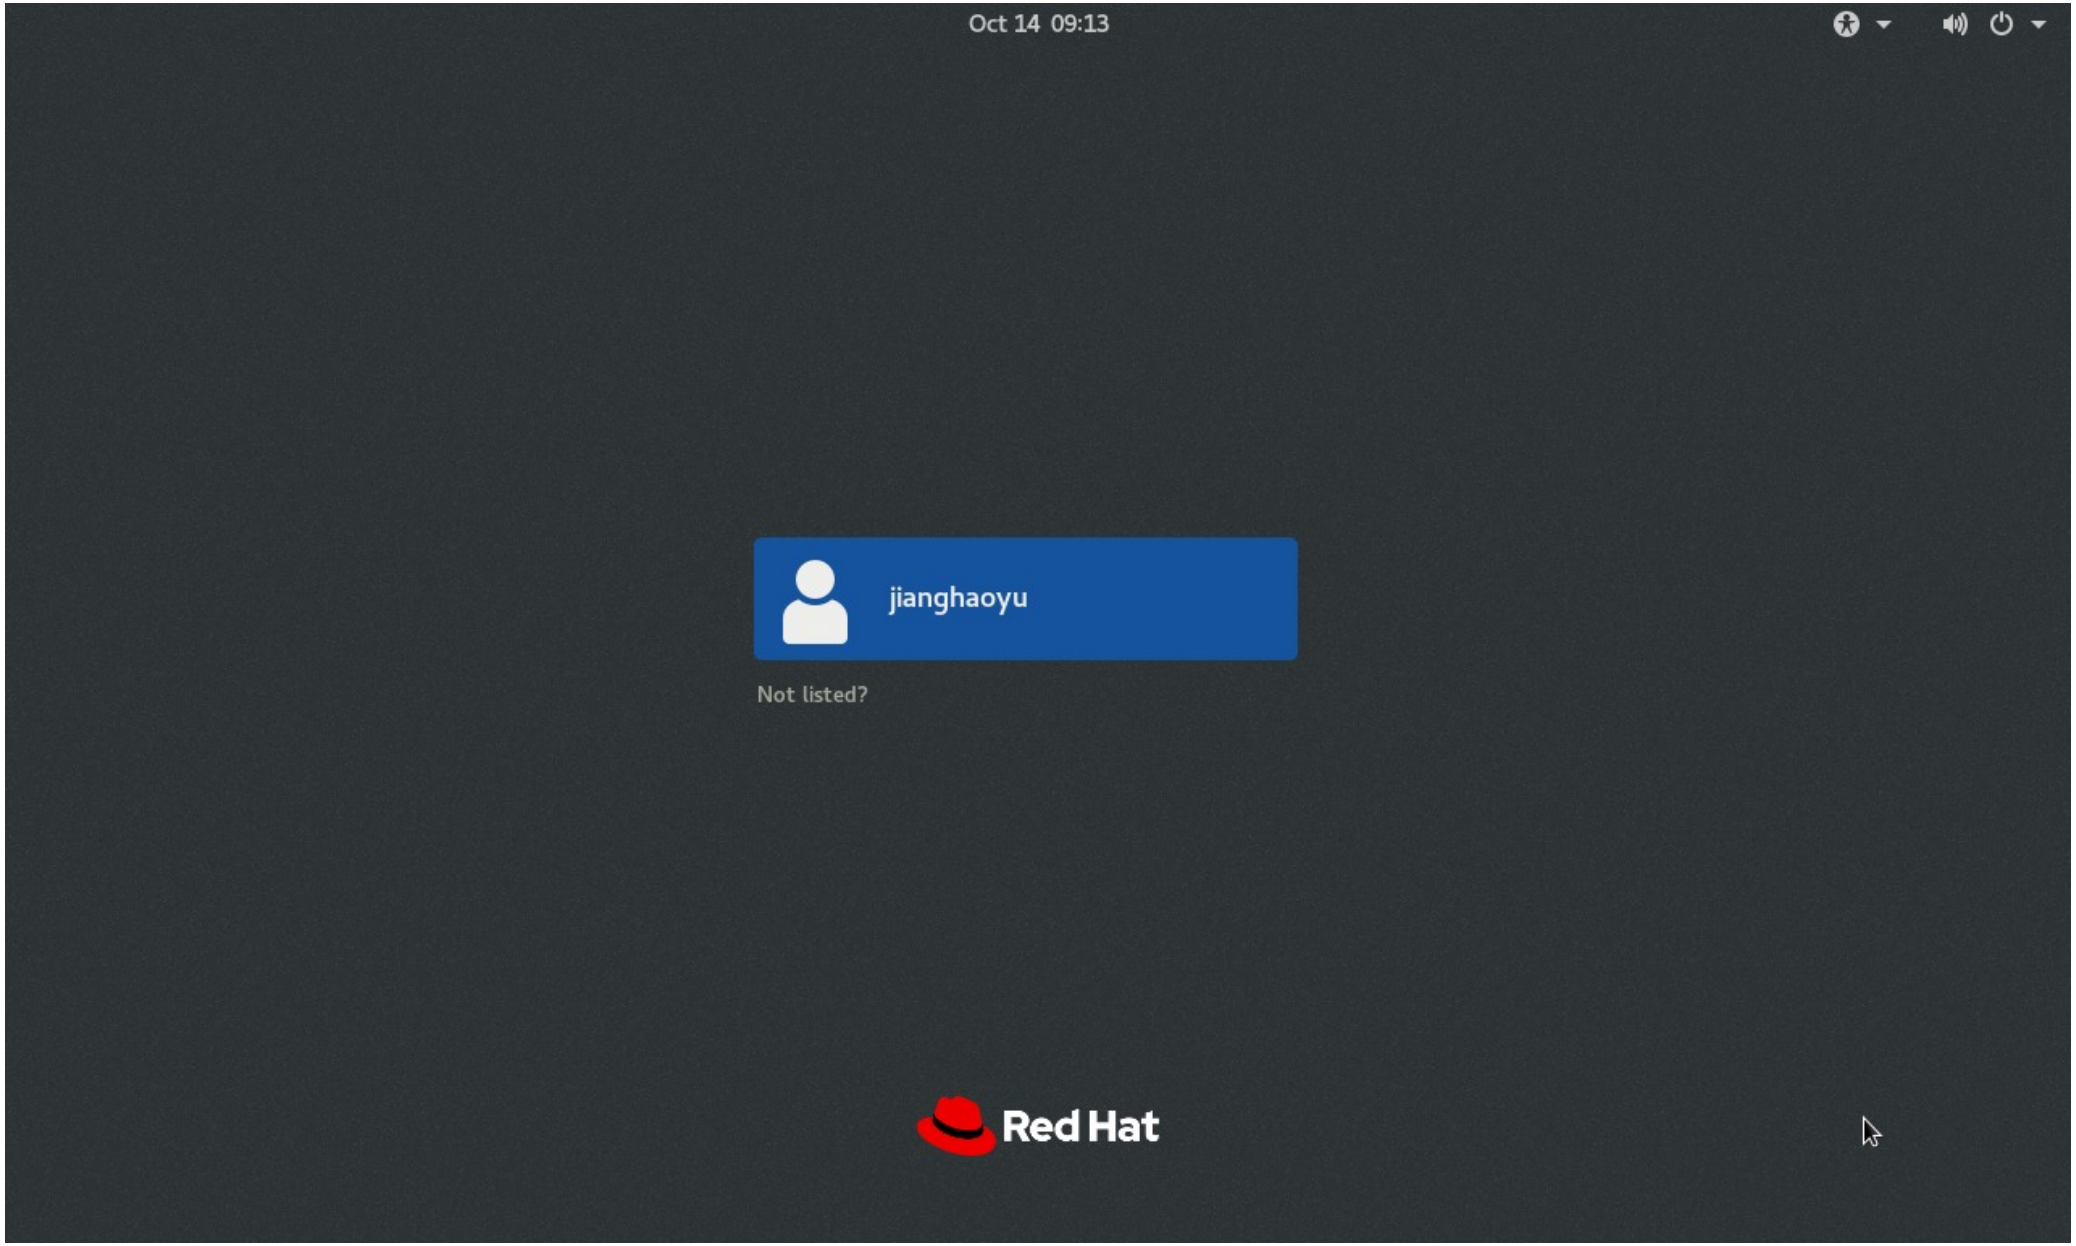
□□:    Client1.project8.lab
Address:  192.168.10.11

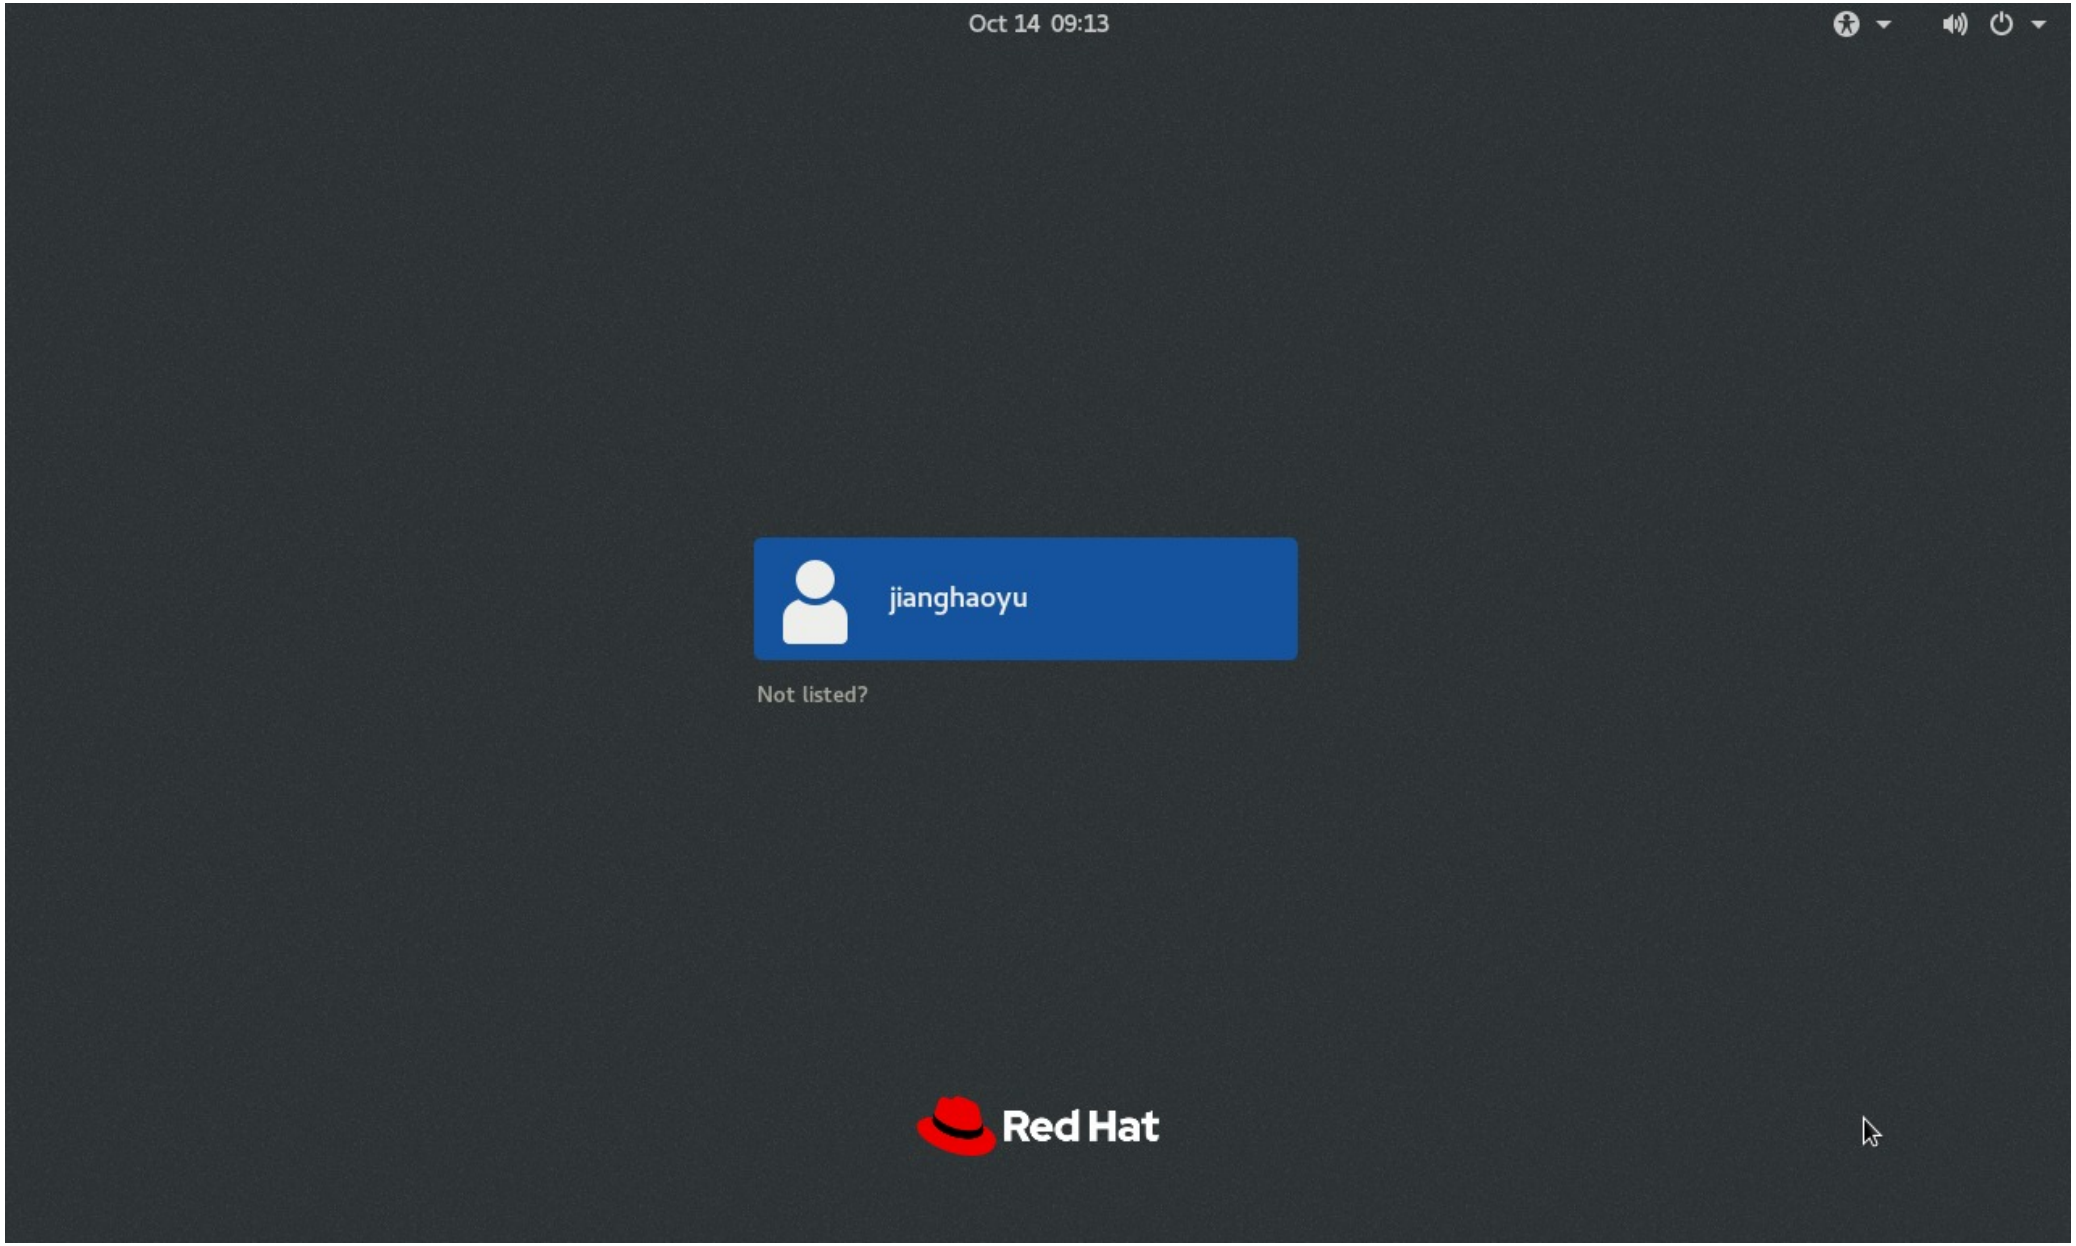

=== reverse 192.168.10.1 ===
□□□:  Server01.project8.lab
Address:  192.168.10.1
```

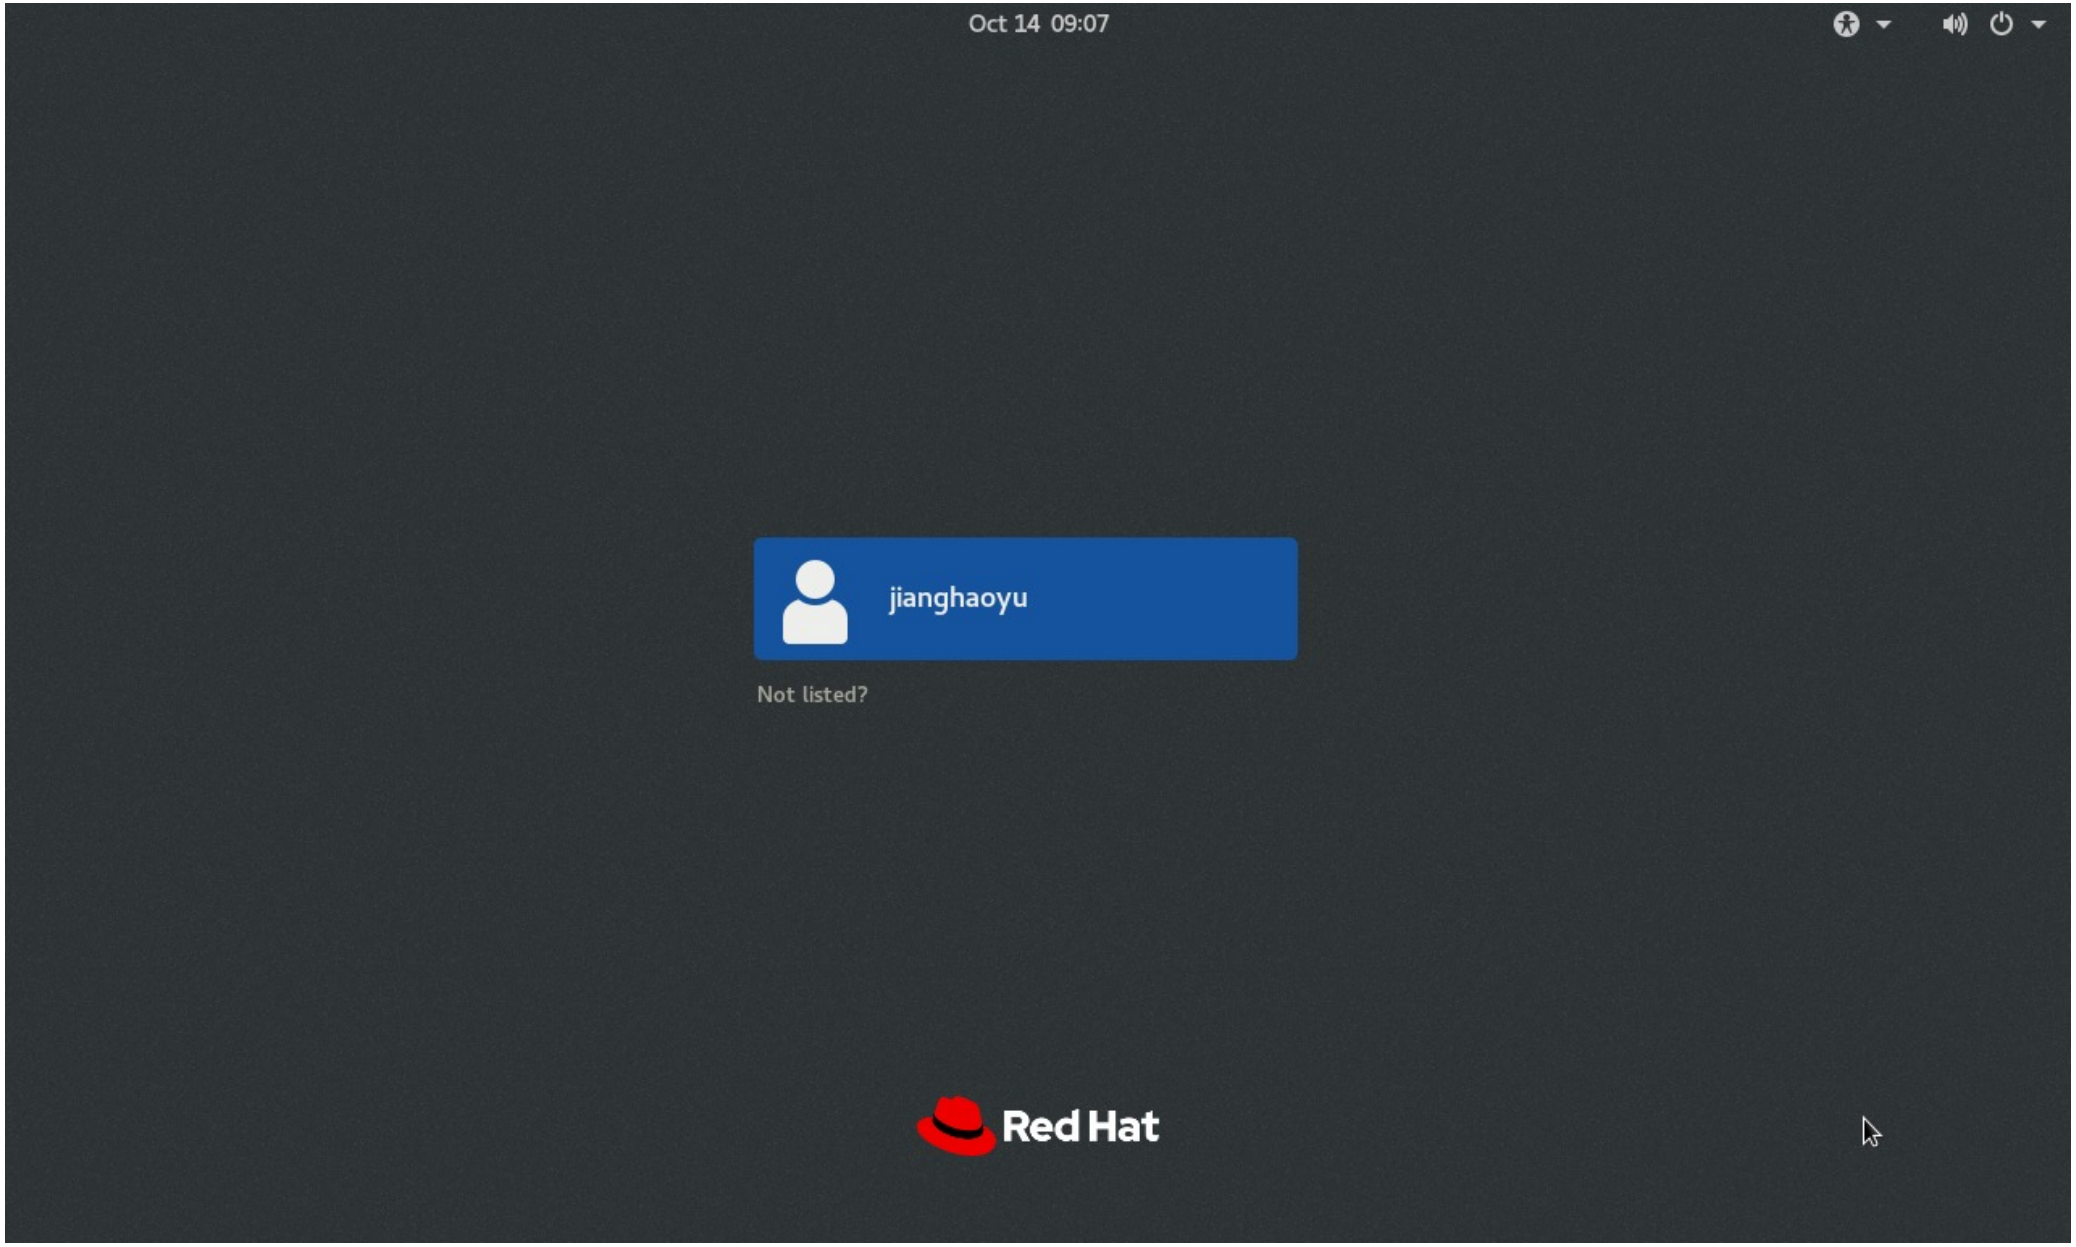

Red Hat
INSTALLATION PROGRESS
RED HAT ENTERPRISE LINUX 8.3 INSTALLATION
us
Help!
Installing boot loader
Quit
Reboot System


[OK] Reached target Paths.
[OK] Started Forward Password Requests to Plymouth Directory Watch.
[8.440119] sd 2:0:0:0: [sda] Assuming drive cache: write through
[OK] Started udev Wait for Complete Device Initialization.
Starting Device-Mapper Multipath Device Controller...
[OK] Started Device-Mapper Multipath Device Controller.
Starting Open-iSCSI...
[OK] Reached target Local File Systems (Pre).
[OK] Reached target Local File Systems.
Starting Create Volatile Files and Directories...
[OK] Started Open-iSCSI.
Starting dracut initqueue hook...
[OK] Started Create Volatile Files and Directories.
[OK] Reached target System Initialization.
[OK] Reached target Basic System.
[OK] Started Show Plymouth Boot Screen.
[OK] Reached target Local Encrypted Volumes.
[OK] Reached target Paths.
[OK] Started Forward Password Requests to Plymouth Directory Watch.
[OK] Started udev Wait for Complete Device Initialization.
Starting Device-Mapper Multipath Device Controller...
[OK] Started Device-Mapper Multipath Device Controller.
Starting Open-iSCSI...
[OK] Reached target Local File Systems (Pre).
[OK] Reached target Local File Systems.
Starting Create Volatile Files and Directories...
[OK] Started Open-iSCSI.
Starting dracut initqueue hook...
[OK] Started Create Volatile Files and Directories.
[OK] Reached target System Initialization.
[OK] Reached target Basic System.
/dev/sr0: 6fcf016eef9196573afb38d8f2a231df
Fragment sums: 75b56a222d75b568e3f375c99de372bd3286daf1eef466cbcc7a5c9f8475
Fragment count: 20
Supported ISO: yes
Press [Esc] to abort check.
Checking: 018.9%


Red Hat
INSTALLATION PROGRESS
RED HAT ENTERPRISE LINUX 8.3 INSTALLATION
us
Help!
Configuring man-db.x86_64
Quit
Reboot System

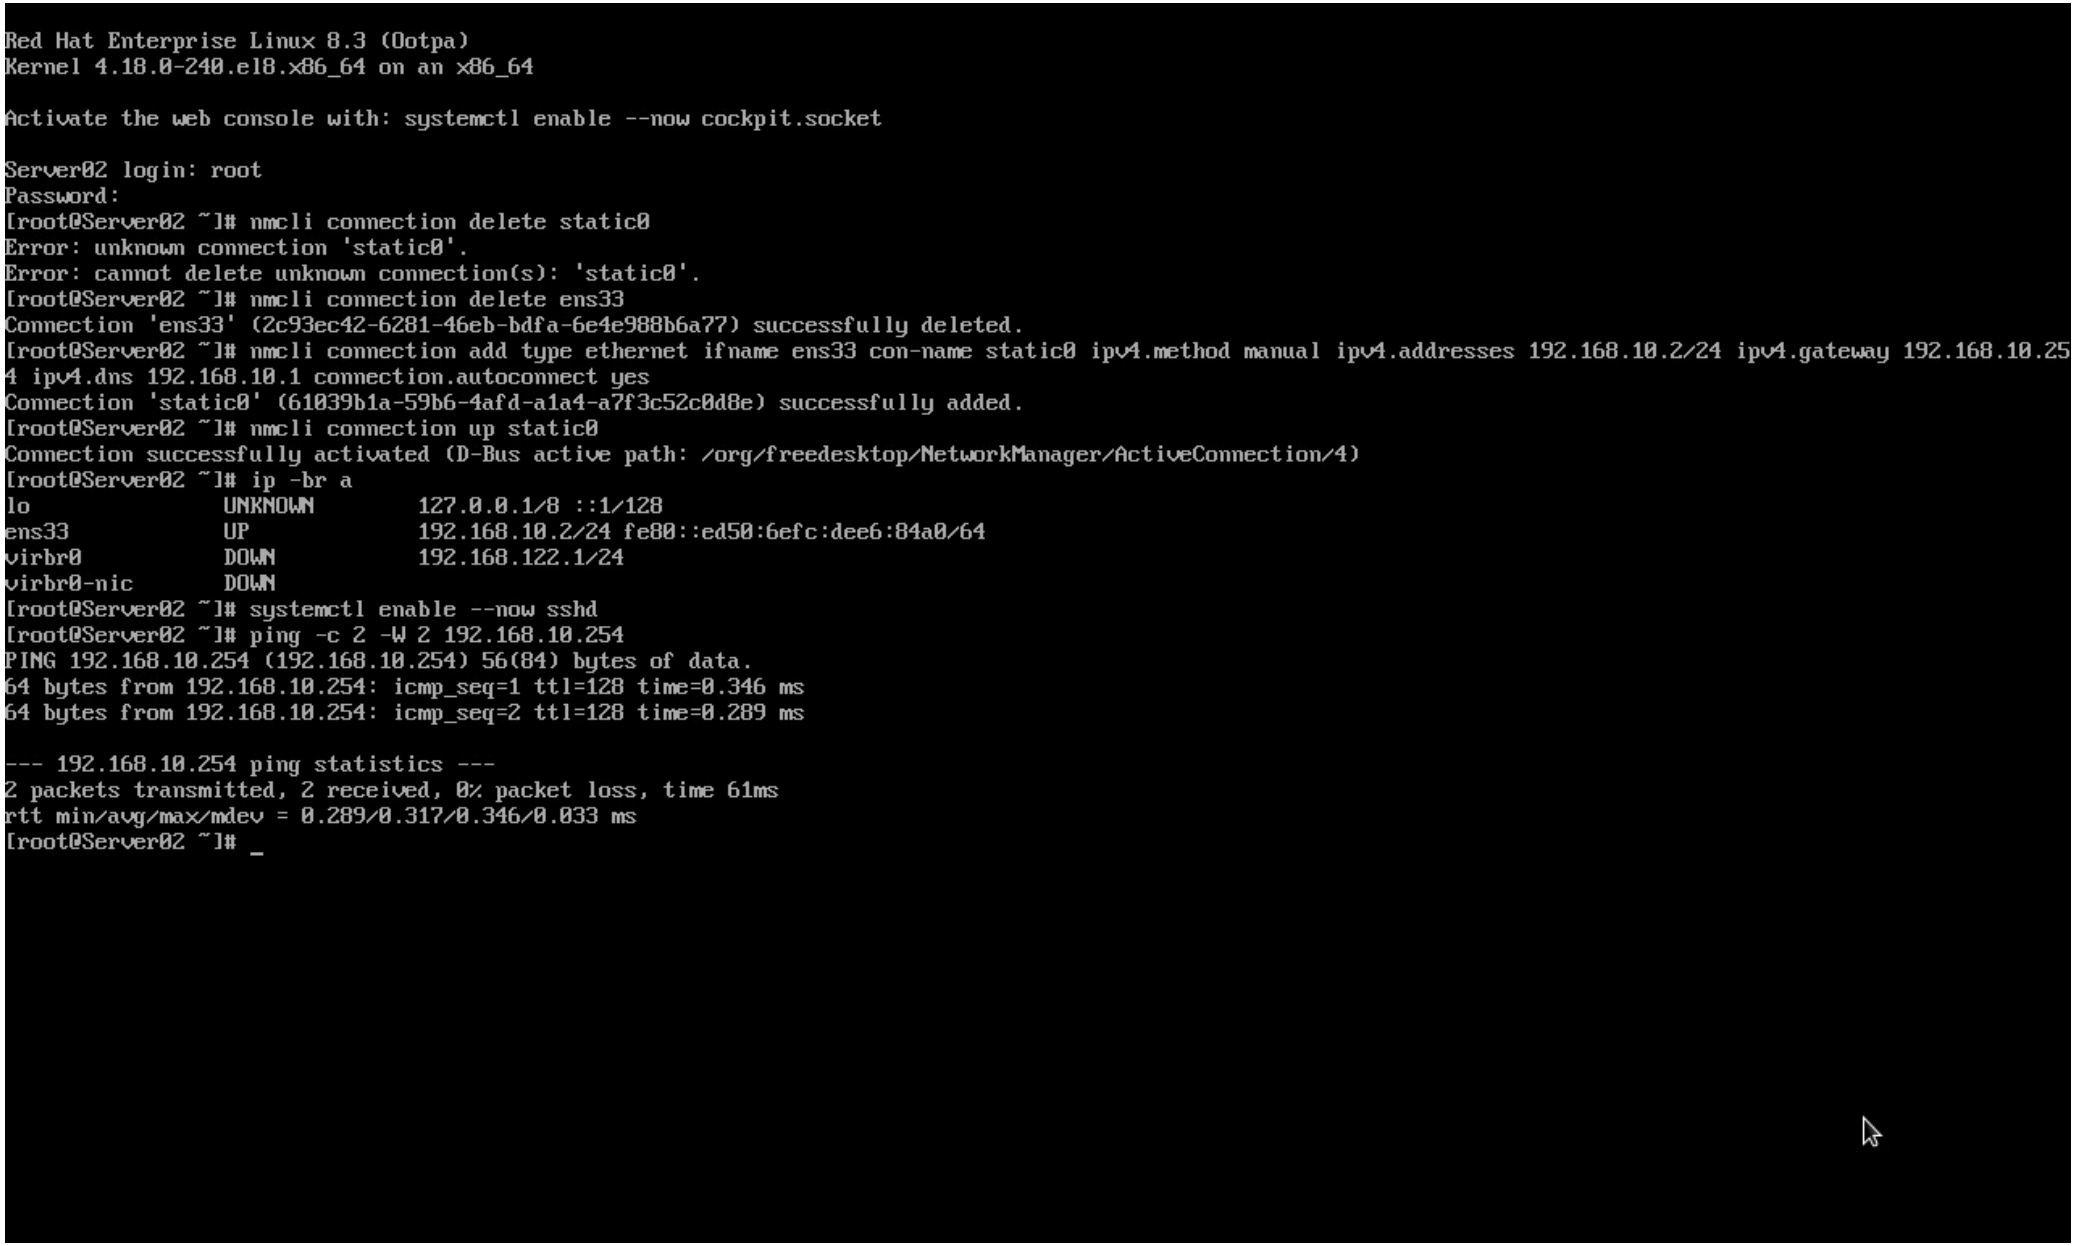

Oct 14 09:13
jianghaoyu
Not listed?
Red Hat


Oct 14 09:13
jianghaoyu
Not listed?
Red Hat


Oct 14 09:07
jianghaoyu
Not listed?
Red Hat

```
bash: tic0: command not found...
Similar command is: 'tic'
[root@Client1 ~]# nmclii pc o-nbnre cat
bash: nmclii: command not found...
Similar command is: 'nmcli'
[root@Client1 ~]# ion up static0
bash: ion: command not found...
[root@Client1 ~]# systemctl enable --now sshd
[root@Client1 ~]# ip -br a
lo               UNKNOWN        127.0.0.1/8 ::1/128
ens33            UP
virbr0           DOWN           192.168.122.1/24
virbr0-nic       DOWN
[root@Client1 ~]# ping -c 2 -W 2 192.168.10.254
connect: Network is unreachable
[root@Client1 ~]# systemctl enable --now sshd
[root@Client1 ~]# ping -c 2 -W 2 192.168.10.254
connect: Network is unreachable
[root@Client1 ~]# root
bash: root: command not found...
[root@Client1 ~]# Jhy123
bash: Jhy123: command not found...
[root@Client1 ~]# nmcli connection delete static0
Error: unknown connection 'static0'.
Error: cannot delete unknown connection(s): 'static0'.
[root@Client1 ~]# nmcli connection delete ens33
Error: unknown connection 'ens33'.
Error: cannot delete unknown connection(s): 'ens33'.
[root@Client1 ~]# nmcli connection add type ethernet ifname ens33 con-name static0 ipv4.method manual ipv4.addresses 192.168.10.11/24 ipv4.gateway 192.168.10.25
4 ipv4.dns 192.168.10.1 connection.autoconnect yes
Connection 'static0' (b052a16d-3913-4a4c-9cd9-a38736059384) successfully added.
[root@Client1 ~]# nmcli connection up static0
Connection successfully activated (D-Bus active path: /org/freedesktop/NetworkManager/ActiveConnection/4)
[root@Client1 ~]# ip -br a
lo               UNKNOWN        127.0.0.1/8 ::1/128
ens33            UP             192.168.10.11/24 fe80::5137:b5c0:9d37:1696/64
virbr0           DOWN           192.168.122.1/24
virbr0-nic       DOWN
[root@Client1 ~]# systemctl enable --now sshd
[root@Client1 ~]# ping -c 2 -W 2 192.168.10.254
PING 192.168.10.254 (192.168.10.254) 56(84) bytes of data.
64 bytes from 192.168.10.254: icmp_seq=1 ttl=128 time=0.282 ms
64 bytes from 192.168.10.254: icmp_seq=2 ttl=128 time=0.258 ms

--- 192.168.10.254 ping statistics ---
2 packets transmitted, 2 received, 0% packet loss, time 2ms
rtt min/avg/max/mdev = 0.258/0.270/0.282/0.012 ms
[root@Client1 ~]#
```

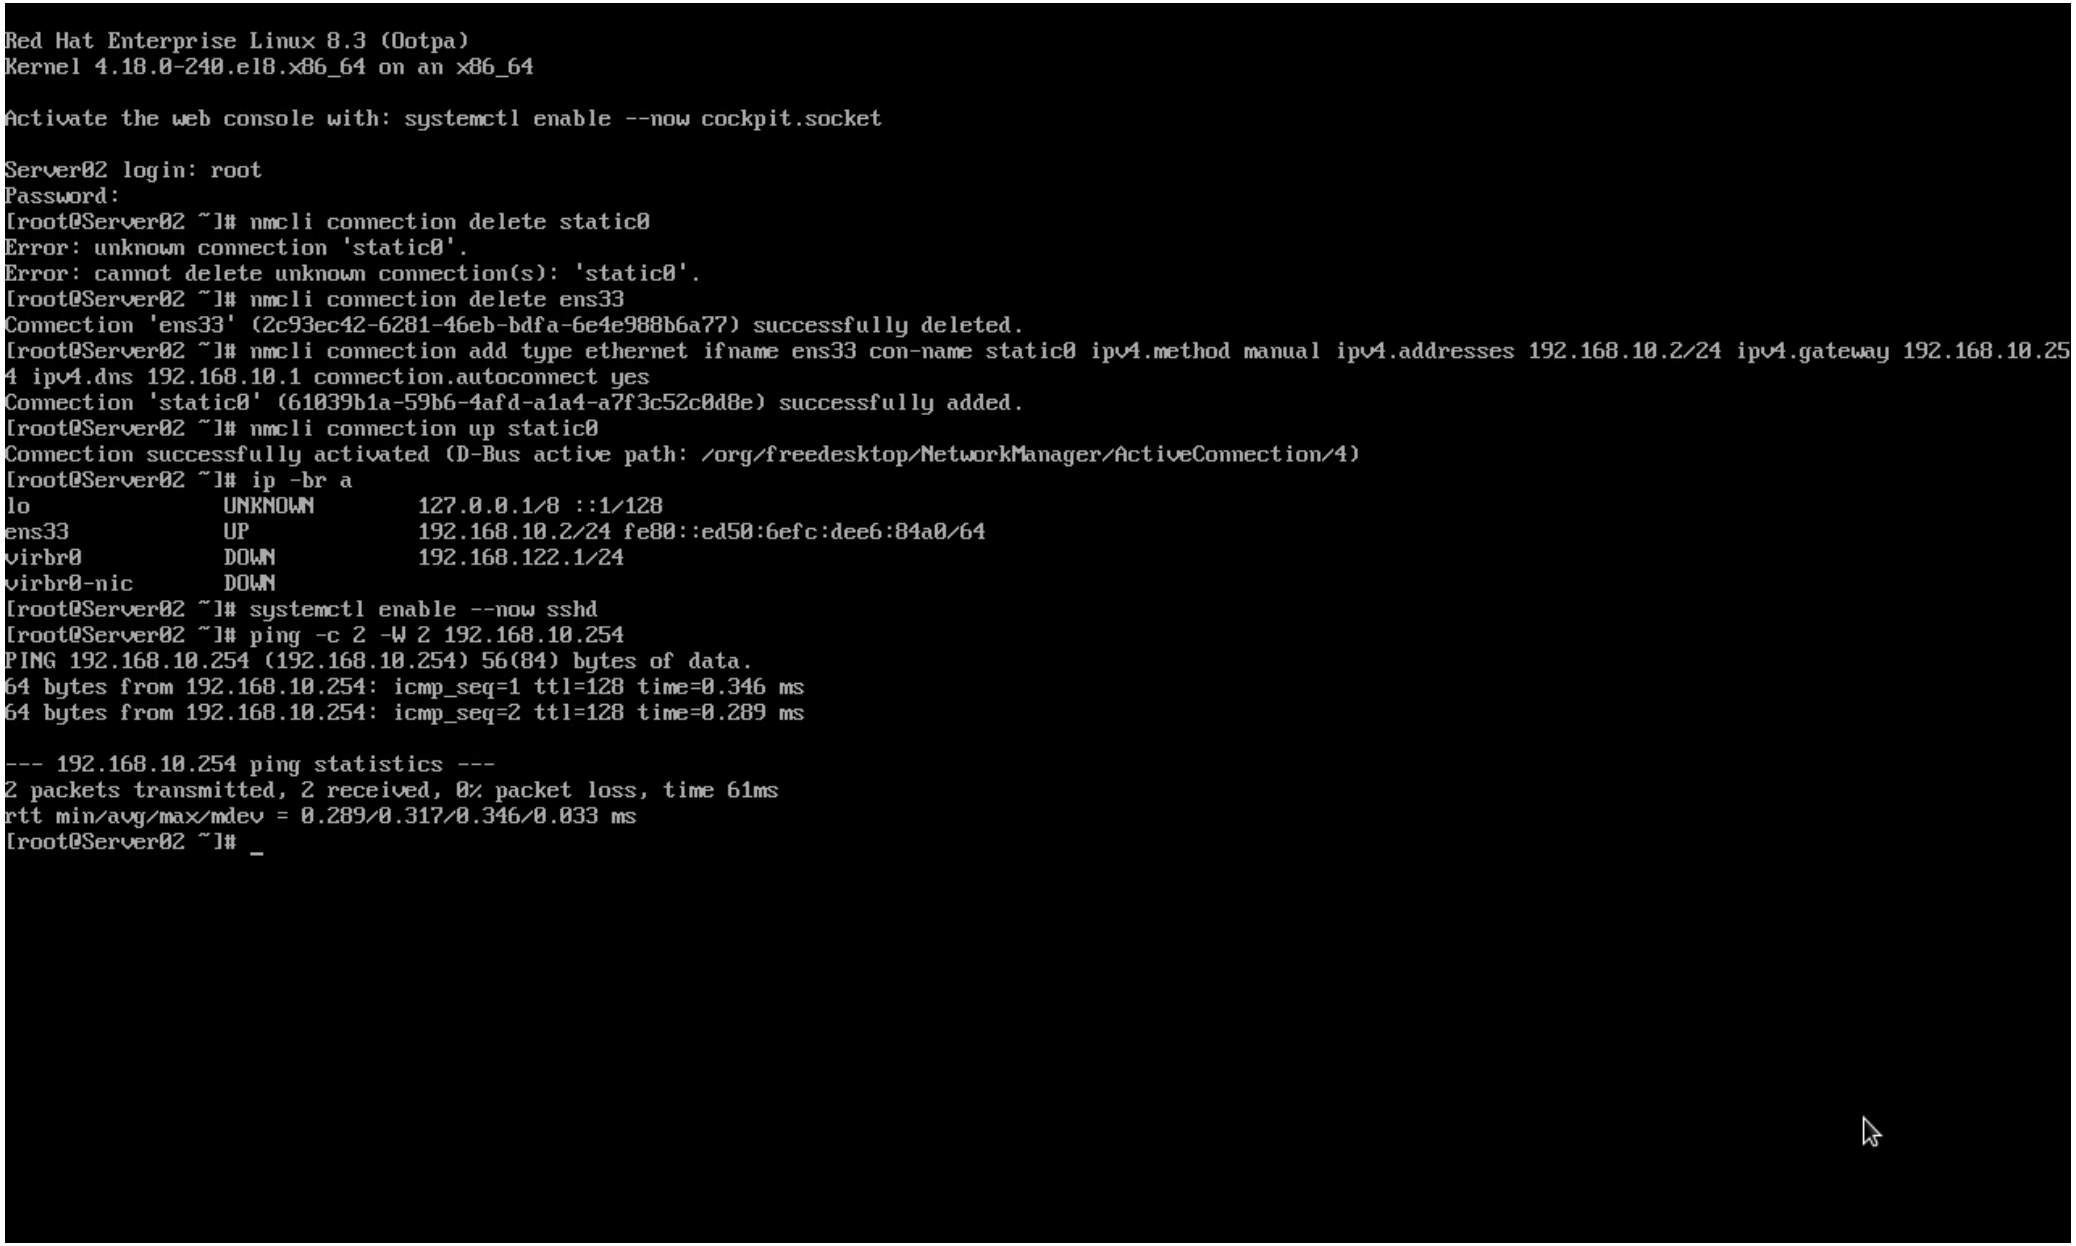

Red Hat Enterprise Linux 8.3 (Ootpa)
Kernel 4.18.0-240.el8.x86_64 on an x86_64
Activate the web console with: systemctl enable --now cockpit.socket
Server02 login: root
Password:
[root@Server02 ~]# nmcli connection delete static0
Error: unknown connection 'static0'.
Error: cannot delete unknown connection(s): 'static0'.
[root@Server02 ~]# nmcli connection delete ens33
Connection 'ens33' (2c93ec42-6281-46eb-bdfa-6e4e988b6a77) successfully deleted.
[root@Server02 ~]# nmcli connection add type ethernet ifname ens33 con-name static0 ipv4.method manual ipv4.addresses 192.168.10.2/24 ipv4.gateway 192.168.10.25
4 ipv4.dns 192.168.10.1 connection.autoconnect yes
Connection 'static0' (61039b1a-59b6-4afd-a1a4-a7f3c52c0d8e) successfully added.
[root@Server02 ~]# nmcli connection up static0
Connection successfully activated (D-Bus active path: /org/freedesktop/NetworkManager/ActiveConnection/4)
[root@Server02 ~]# ip -br a
lo UNKNOWN 127.0.0.1/8 ::1/128
ens33 UP 192.168.10.2/24 fe80::ed50:6efc:dee6:84a0/64
virbr0 DOWN 192.168.122.1/24
virbr0-nic DOWN
[root@Server02 ~]# systemctl enable --now sshd
[root@Server02 ~]# ping -c 2 -W 2 192.168.10.254
PING 192.168.10.254 (192.168.10.254) 56(84) bytes of data.
64 bytes from 192.168.10.254: icmp_seq=1 ttl=128 time=0.346 ms
64 bytes from 192.168.10.254: icmp_seq=2 ttl=128 time=0.289 ms
--- 192.168.10.254 ping statistics ---
2 packets transmitted, 2 received, 0% packet loss, time 61ms
rtt min/avg/max/mdev = 0.289/0.317/0.346/0.033 ms
[root@Server02 ~]# _

```
bash: tic0: command not found...
Similar command is: 'tic'
[root@Client1 ~]# nmclii pc o-nbnre cat
bash: nmclii: command not found...
Similar command is: 'nmcli'
[root@Client1 ~]# ion up static0
bash: ion: command not found...
[root@Client1 ~]# systemctl enable --now sshd
[root@Client1 ~]# ip -br a
lo               UNKNOWN        127.0.0.1/8 ::1/128
ens33            UP
virbr0           DOWN           192.168.122.1/24
virbr0-nic       DOWN
[root@Client1 ~]# ping -c 2 -W 2 192.168.10.254
connect: Network is unreachable
[root@Client1 ~]# systemctl enable --now sshd
[root@Client1 ~]# ping -c 2 -W 2 192.168.10.254
connect: Network is unreachable
[root@Client1 ~]# root
bash: root: command not found...
[root@Client1 ~]# Jhy123
bash: Jhy123: command not found...
[root@Client1 ~]# nmcli connection delete static0
Error: unknown connection 'static0'.
Error: cannot delete unknown connection(s): 'static0'.
[root@Client1 ~]# nmcli connection delete ens33
Error: unknown connection 'ens33'.
Error: cannot delete unknown connection(s): 'ens33'.
[root@Client1 ~]# nmcli connection add type ethernet ifname ens33 con-name static0 ipv4.method manual ipv4.addresses 192.168.10.11/24 ipv4.gateway 192.168.10.25
4 ipv4.dns 192.168.10.1 connection.autoconnect yes
Connection 'static0' (b052a16d-3913-4a4c-9cd9-a38736059384) successfully added.
[root@Client1 ~]# nmcli connection up static0
Connection successfully activated (D-Bus active path: /org/freedesktop/NetworkManager/ActiveConnection/4)
[root@Client1 ~]# ip -br a
lo               UNKNOWN        127.0.0.1/8 ::1/128
ens33            UP             192.168.10.11/24 fe80::5137:b5c0:9d37:1696/64
virbr0           DOWN           192.168.122.1/24
virbr0-nic       DOWN
[root@Client1 ~]# systemctl enable --now sshd
[root@Client1 ~]# ping -c 2 -W 2 192.168.10.254
PING 192.168.10.254 (192.168.10.254) 56(84) bytes of data.
64 bytes from 192.168.10.254: icmp_seq=1 ttl=128 time=0.282 ms
64 bytes from 192.168.10.254: icmp_seq=2 ttl=128 time=0.258 ms

--- 192.168.10.254 ping statistics ---
2 packets transmitted, 2 received, 0% packet loss, time 2ms
rtt min/avg/max/mdev = 0.258/0.270/0.282/0.012 ms
[root@Client1 ~]#
```

Server02 network 192.168.10.2

```
Server02
lo              UNKNOWN        127.0.0.1/8 ::1/128
ens33           UP             192.168.10.2/24 fe80::ed50:6efc:dee6:84a0/64
virbr0          DOWN           192.168.122.1/24
virbr0-nic      DOWN
```


Red Hat Enterprise Linux 8.3 (Ootpa)
Kernel 4.18.0-240.el8.x86_64 on an x86_64
Activate the web console with: systemctl enable --now cockpit.socket
Server02 login: root
Password:
[root@Server02 ~]# nmcli connection delete static0
Error: unknown connection 'static0'.
Error: cannot delete unknown connection(s): 'static0'.
[root@Server02 ~]# nmcli connection delete ens33
Connection 'ens33' (2c93ec42-6281-46eb-bdfa-6e4e988b6a77) successfully deleted.
[root@Server02 ~]# nmcli connection add type ethernet ifname ens33 con-name static0 ipv4.method manual ipv4.addresses 192.168.10.2/24 ipv4.gateway 192.168.10.25
4 ipv4.dns 192.168.10.1 connection.autoconnect yes
Connection 'static0' (61039b1a-59b6-4afd-a1a4-a7f3c52c0d8e) successfully added.
[root@Server02 ~]# nmcli connection up static0
Connection successfully activated (D-Bus active path: /org/freedesktop/NetworkManager/ActiveConnection/4)
[root@Server02 ~]# ip -br a
lo UNKNOWN 127.0.0.1/8 ::1/128
ens33 UP 192.168.10.2/24 fe80::ed50:6efc:dee6:84a0/64
virbr0 DOWN 192.168.122.1/24
virbr0-nic DOWN
[root@Server02 ~]# systemctl enable --now sshd
[root@Server02 ~]# ping -c 2 -W 2 192.168.10.254
PING 192.168.10.254 (192.168.10.254) 56(84) bytes of data.
64 bytes from 192.168.10.254: icmp_seq=1 ttl=128 time=0.346 ms
64 bytes from 192.168.10.254: icmp_seq=2 ttl=128 time=0.289 ms
--- 192.168.10.254 ping statistics ---
2 packets transmitted, 2 received, 0% packet loss, time 61ms
rtt min/avg/max/mdev = 0.289/0.317/0.346/0.033 ms
[root@Server02 ~]# _

Server02 BIND cache-forwarder named.conf

```
options {
    listen-on port 53 { 127.0.0.1; 192.168.10.2; };
    listen-on-v6 { none; };
    directory "/var/named";
    dump-file "/var/named/data/cache_dump.db";
    statistics-file "/var/named/data/named_stats.txt";
    allow-query { localhost; 192.168.10.0/24; };
    recursion yes;
    allow-recursion { localhost; 192.168.10.0/24; };
    forwarders { 192.168.10.1; };
    forward only;
    dnssec-validation no;
};
logging {
    channel default_debug {
        file "data/named.run";
        severity dynamic;
    };
};
zone "." IN {
    type hint;
    file "named.ca";
};
```

```
Stage: Server01 Authoritative BIND verify
2026-10-14 01:38:30
192.168.10.1
192.168.10.1
192.168.10.11
Server01.project8.lab.
Client1.project8.lab.
S1_DONE
```

Server02 dig forward 2026-10-14 08:01:22

```
Server02 dig forward 2026-10-14 08:01:22
==== S02 ====
www.long90.cn.       86395  IN     A      192.168.10.4
long90.cn.           86395  IN     MX     10 mail.long90.cn.
dns.long90.cn.       86400  IN     A      192.168.10.1
4.10.168.192.in-addr.arpa. 86400 IN PTR    www.long90.cn.
active
cockpit dhcpv6-client dns ssh
    listen-on port 53 { any; };
    listen-on-v6 port 53 { none; };
    allow-query { any; };
    forwarders { 192.168.10.1; };
    forward only;
```

Host nslookup via Server02 cache-forwarder

```
=== via Server02 Server01.project8.lab ===
□□□:  Server02.project8.lab
Address:  192.168.10.2

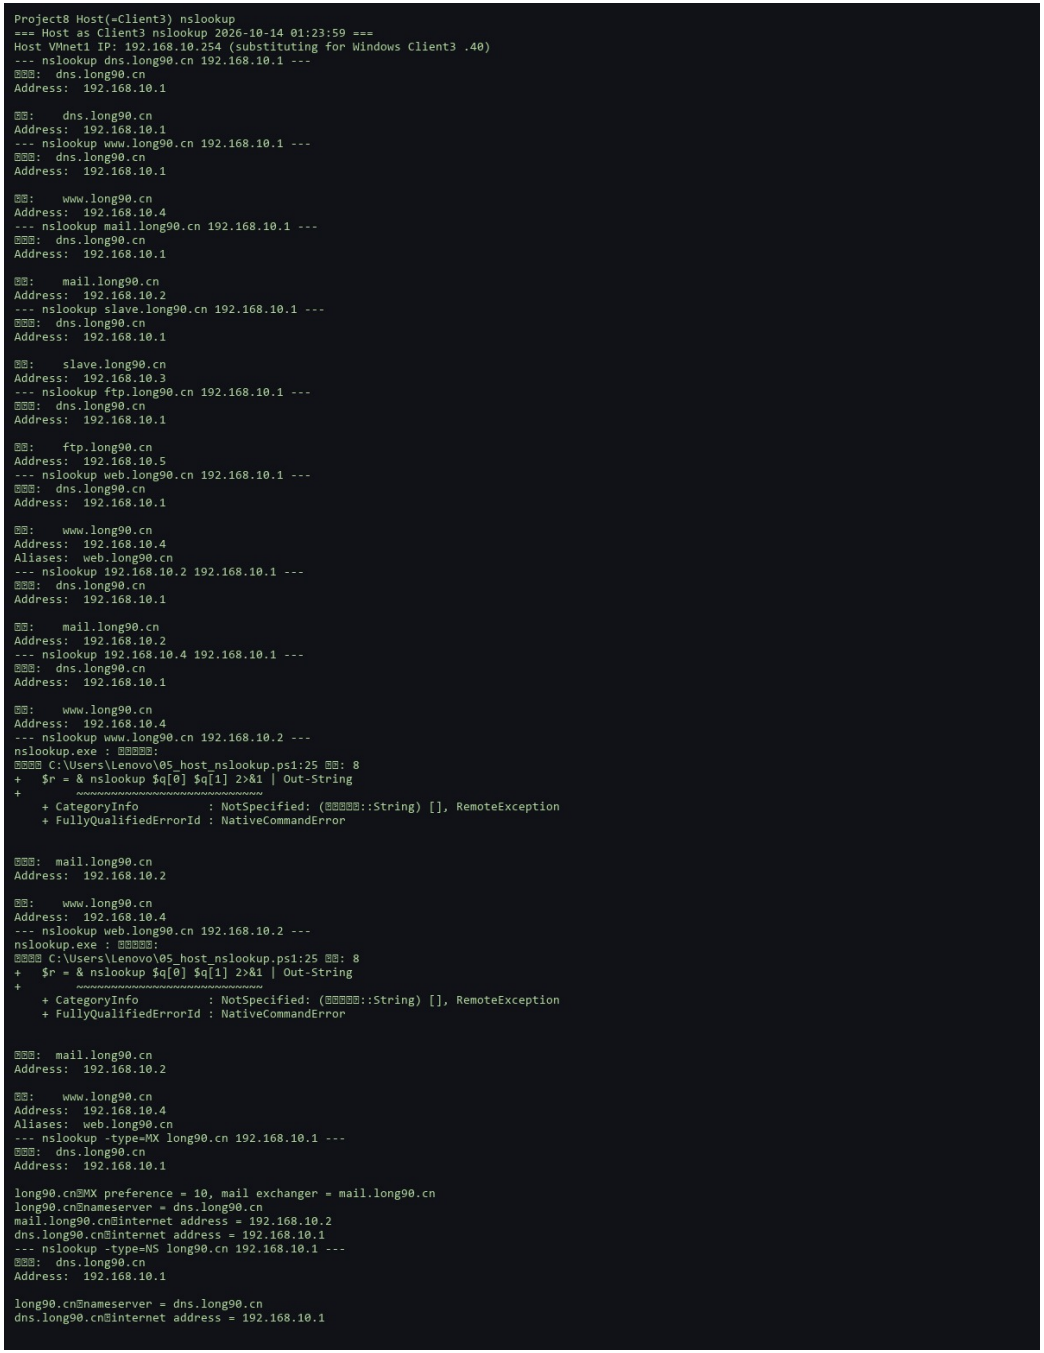
□□:    Server01.project8.lab
Address:  192.168.10.1


=== via Server02 www.project8.lab ===
□□□:  Server02.project8.lab
Address:  192.168.10.2

□□:    www.project8.lab
Address:  192.168.10.1
```

```
Stage: Server02 before cache config
2026-10-14 01:20:59
Server02
active
plink.exe : bash: recursion: command not found
所在位置 C:\Users\Lenovo\p8_finish_now.ps1:10 字符: 62
+ ... ring]$cmd){ & $plink -ssh -hostkey $hk -pw Jhy123 -batch "root@$ip" $ ...
+                  ~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~
    + CategoryInfo          : NotSpecified: (bash: recursion: command not found:String) [], RemoteException
    + FullyQualifiedErrorId : NativeCommandError

bash: listen-on: command not found
192.168.10.1
S2_PRE
```


Project8 Host(=Client3) nslookup
=== Host as Client3 nslookup 2026-10-14 01:23:59 ===
Host VMnet1 IP: 192.168.10.254 (substituting for Windows Client3 .40)
--- nslookup dns.long90.cn 192.168.10.1 ---
Address: 192.168.10.1
Address: 192.168.10.1
--- nslookup www.long90.cn 192.168.10.1 ---
Address: 192.168.10.1
Address: 192.168.10.1
--- nslookup mail.long90.cn 192.168.10.1 ---
Address: 192.168.10.1
Address: 192.168.10.1
--- nslookup slave.long90.cn 192.168.10.1 ---
Address: 192.168.10.1
Address: 192.168.10.1
--- nslookup ftp.long90.cn 192.168.10.1 ---
Address: 192.168.10.1
Address: 192.168.10.1
--- nslookup web.long90.cn 192.168.10.1 ---
Address: 192.168.10.1
Address: 192.168.10.4
Aliases: web.long90.cn
--- nslookup 192.168.10.2 192.168.10.1 ---
Address: 192.168.10.1
Address: 192.168.10.2
--- nslookup 192.168.10.4 192.168.10.1 ---
Address: 192.168.10.1
Address: 192.168.10.4
--- nslookup www.long90.cn 192.168.10.2 ---
nslookup.exe :
C:\Users\Lenovo\05_host_nslookup.ps1:25
+ $r = & nslookup $q[0] $q[1] 2>&1 | Out-String
+ ~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~
+ CategoryInfo : NotSpecified: (:String) [], RemoteException
+ FullyQualifiedErrorId : NativeCommandError
Address: 192.168.10.2
Address: 192.168.10.4
--- nslookup web.long90.cn 192.168.10.2 ---
nslookup.exe :
C:\Users\Lenovo\05_host_nslookup.ps1:25
+ $r = & nslookup $q[0] $q[1] 2>&1 | Out-String
+ ~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~
+ CategoryInfo : NotSpecified: (:String) [], RemoteException
+ FullyQualifiedErrorId : NativeCommandError
Address: 192.168.10.2
Address: 192.168.10.4
Aliases: web.long90.cn
--- nslookup -type=MX long90.cn 192.168.10.1 ---
Address: 192.168.10.1
long90.cn MX preference = 10, mail exchanger = mail.long90.cn
long90.cn nameserver = dns.long90.cn
mail.long90.cn internet address = 192.168.10.2
dns.long90.cn internet address = 192.168.10.1
--- nslookup -type=NS long90.cn 192.168.10.1 ---
Address: 192.168.10.1
long90.cn nameserver = dns.long90.cn
dns.long90.cn internet address = 192.168.10.1

Stage: Server02 Cache/Forward BIND

2026-10-14 01:38:20

```
success
plink.exe : Warning: ALREADY_ENABLED: dns
所在位置 C:\Users\Lenovo\AppData\Local\Temp\ps-script-d1b6ebe5-d4cd-4cb4-b1ce-93e2fba89efe.ps1:103 字符: 7
+ $s2 = & $plink -ssh -hostkey $hk2 -pw Jhy123 -batch root@192.168.10.2 ...
+       ~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~
    + CategoryInfo          : NotSpecified: (Warning: ALREADY_ENABLED: dns:String) [], RemoteException
    + FullyQualifiedErrorId : NativeCommandError

success
192.168.10.1
192.168.10.1
BIND_CACHE_OK
192.168.10.1
192.168.10.1
Server01.project8.lab.
S2_DONE
```

```
dig matrix PASS (reverified) 2026-10-14 08:01:22
dig matrix PASS (reverified) 2026-10-14 08:01:22
==== S01 DIG MATRIX ====
--- dig @dns.long90.cn ---
dns.long90.cn.       86400  IN     A      192.168.10.1
long90.cn.           86400  IN     NS     dns.long90.cn.
--- dig @mail.long90.cn ---
mail.long90.cn.             86400  IN     A      192.168.10.2
long90.cn.           86400  IN     NS     dns.long90.cn.
--- dig @slave.long90.cn ---
slave.long90.cn.     86400  IN     A      192.168.10.3
long90.cn.           86400  IN     NS     dns.long90.cn.
--- dig @www.long90.cn ---
www.long90.cn.       86400  IN     A      192.168.10.4
long90.cn.           86400  IN     NS     dns.long90.cn.
--- dig @ftp.long90.cn ---
ftp.long90.cn.       86400  IN     A      192.168.10.5
long90.cn.           86400  IN     NS     dns.long90.cn.
--- dig @web.long90.cn ---
web.long90.cn.       86400  IN     CNAME  www.long90.cn.
long90.cn.           86400  IN     NS     dns.long90.cn.
--- dig @long90.cn ---
long90.cn.           86400  IN     NS     dns.long90.cn.
--- dig @long90.cn ---
long90.cn.           86400  IN     MX     10 mail.long90.cn.
long90.cn.           86400  IN     NS     dns.long90.cn.
--- dig @long90.cn ---
long90.cn.           86400  IN     SOA    dns.long90.cn. root.long90.cn. 2026101402 86400 3600 604800 10800
long90.cn.           86400  IN     NS     dns.long90.cn.
==== S01 PTR ====
1.10.168.192.in-addr.arpa. 86400 IN PTR    dns.long90.cn.
2.10.168.192.in-addr.arpa. 86400 IN PTR    mail.long90.cn.
3.10.168.192.in-addr.arpa. 86400 IN PTR    slave.long90.cn.
4.10.168.192.in-addr.arpa. 86400 IN PTR    www.long90.cn.
5.10.168.192.in-addr.arpa. 86400 IN PTR    ftp.long90.cn.
==== S02 FORWARD ====
www.long90.cn.       86400  IN     A      192.168.10.4
long90.cn.           86400  IN     MX     10 mail.long90.cn.
web.long90.cn.       86400  IN     CNAME  www.long90.cn.
www.long90.cn.       86400  IN     A      192.168.10.4
==== CHECK ====
zone long90.cn/IN: loaded serial 2026101402
OK
zone 10.168.192.in-addr.arpa/IN: 10.168.192.in-addr.arpa/MX 'mail.long90.cn' (out of zone) has no addresses records (A or AAAA)
zone 10.168.192.in-addr.arpa/IN: loaded serial 2026101402
OK
active
cockpit dhcpv6-client dns ssh
```

```
Stage: Server02 dig via cache
2026-10-14 01:21:31
active
192.168.10.1
192.168.10.1
Server02.project8.lab.
S2_OK
```

Stage: Client1 SSH Ready

2026-10-14 01:21:48

```
Client1
1: lo    inet 127.0.0.1/8 scope host lo\       valid_lft forever preferred_lft forever
2: ens33    inet 192.168.10.11/24 brd 192.168.10.255 scope global noprefixroute ens33\       valid_lft forever preferred_lft forever
3: virbr0    inet 192.168.122.1/24 brd 192.168.122.255 scope global virbr0\       valid_lft forever preferred_lft forever
# Generated by NetworkManager
nameserver 192.168.10.1
C1_PRE
```

```
final_s01_named.conf
options {
    listen-on port 53 { any; };
    listen-on-v6 port 53 { any; };
    directory "/var/named";
    dump-file "/var/named/data/cache_dump.db";
    statistics-file "/var/named/data/named_stats.txt";
    memstatistics-file "/var/named/data/named_mem_stats.txt";
    allow-query { any; };
    recursion yes;
    dnssec-validation no;
};

include "/etc/named.zones";
include "/etc/named.root.key";
```

```
final_s01_named.zones
zone "long90.cn" IN {
    type master;
    file "long90.cn.zone";
    allow-update { none; };
};

zone "10.168.192.in-addr.arpa" IN {
    type master;
    file "1.10.168.192.zone";
    allow-update { none; };
};
```

Client1 DNS tests 2026-10-14 08:01:22

```
Client1 DNS tests 2026-10-14 08:01:22
==== CLIENT1 ====
# Generated by NetworkManager
search long90.cn
nameserver 192.168.10.1
nameserver 192.168.10.2
www.long90.cn.       86400  IN     A      192.168.10.4
www.long90.cn.       86394  IN     A      192.168.10.4
www.long90.cn.       86400  IN     A      192.168.10.4
Using domain server:
Name: 192.168.10.1
Address: 192.168.10.1#53
Aliases:

web.long90.cn is an alias for www.long90.cn.
www.long90.cn has address 192.168.10.4
Server:       192.168.10.1
Address:      192.168.10.1#53

Name:  ftp.long90.cn
Address: 192.168.10.5

Server:       192.168.10.2
Address:      192.168.10.2#53

Non-authoritative answer:
Name:  www.long90.cn
Address: 192.168.10.4
```

```
final_s01_long90.cn.zone
$TTL 1D
@   IN  SOA dns.long90.cn. root.long90.cn. (
        2026101401 ; serial
        1D
        1H
        1W
        3H
)
@   IN  NS      dns.long90.cn.
@   IN  MX 10   mail.long90.cn.
dns IN  A       192.168.10.1
mail IN A       192.168.10.2
slave IN A      192.168.10.3
www IN  A       192.168.10.4
ftp IN  A       192.168.10.5
web IN  CNAME   www.long90.cn.
```

Client1 acceptance 2026-10-14 08:01:22

```
Client1 acceptance 2026-10-14 08:01:22
==== CLIENT1 ====
# Generated by NetworkManager
search long90.cn
nameserver 192.168.10.1
nameserver 192.168.10.2
www.long90.cn.       86400  IN     A      192.168.10.4
www.long90.cn.       86394  IN     A      192.168.10.4
www.long90.cn.       86400  IN     A      192.168.10.4
Using domain server:
Name: 192.168.10.1
Address: 192.168.10.1#53
Aliases:

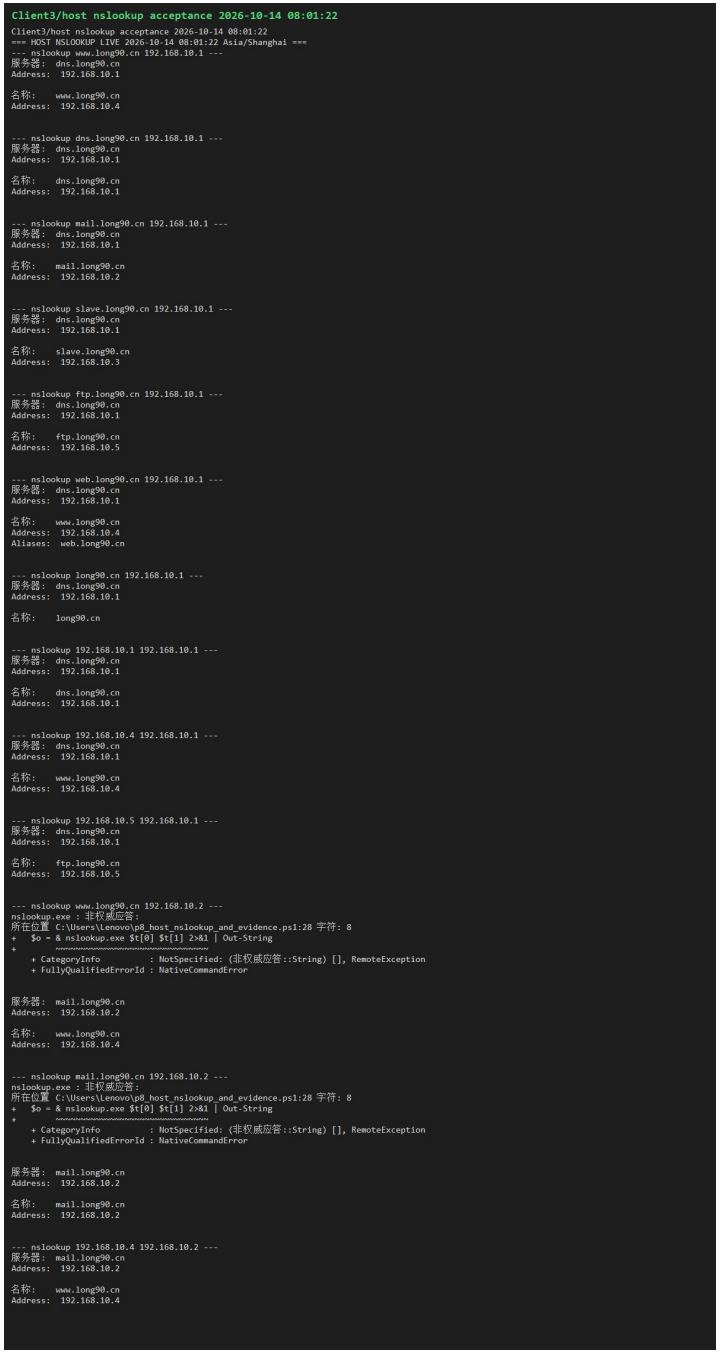
web.long90.cn is an alias for www.long90.cn.
www.long90.cn has address 192.168.10.4
Server:       192.168.10.1
Address:      192.168.10.1#53

Name:  ftp.long90.cn
Address: 192.168.10.5

Server:       192.168.10.2
Address:      192.168.10.2#53

Non-authoritative answer:
Name:  www.long90.cn
Address: 192.168.10.4
```

```
final_s01_rev.zone
$TTL 1D
@   IN  SOA dns.long90.cn. root.long90.cn. (
        2026101401 ; serial
        1D
        1H
        1W
        3H
)
@   IN  NS      dns.long90.cn.
@   IN  MX 10   mail.long90.cn.
1   IN  PTR     dns.long90.cn.
2   IN  PTR     mail.long90.cn.
3   IN  PTR     slave.long90.cn.
4   IN  PTR     www.long90.cn.
5   IN  PTR     ftp.long90.cn.
```



```
Client3/host nslookup acceptance 2026-10-14 08:01:22
Client3/host nslookup acceptance 2026-10-14 08:01:22
=== HOST NSLOOKUP LIVE 2026-10-14 08:01:22 Asia/Shanghai ===
--- nslookup www.long90.cn 192.168.10.1 ---
服务器:  dns.long90.cn
Address:  192.168.10.1

名称:    www.long90.cn
Address:  192.168.10.4


--- nslookup dns.long90.cn 192.168.10.1 ---
服务器:  dns.long90.cn
Address:  192.168.10.1

名称:    dns.long90.cn
Address:  192.168.10.1


--- nslookup mail.long90.cn 192.168.10.1 ---
服务器:  dns.long90.cn
Address:  192.168.10.1

名称:    mail.long90.cn
Address:  192.168.10.2


--- nslookup slave.long90.cn 192.168.10.1 ---
服务器:  dns.long90.cn
Address:  192.168.10.1

名称:    slave.long90.cn
Address:  192.168.10.3


--- nslookup ftp.long90.cn 192.168.10.1 ---
服务器:  dns.long90.cn
Address:  192.168.10.1

名称:    ftp.long90.cn
Address:  192.168.10.5


--- nslookup web.long90.cn 192.168.10.1 ---
服务器:  dns.long90.cn
Address:  192.168.10.1

名称:    www.long90.cn
Address:  192.168.10.4
Aliases:  web.long90.cn


--- nslookup long90.cn 192.168.10.1 ---
服务器:  dns.long90.cn
Address:  192.168.10.1

名称:    long90.cn


--- nslookup 192.168.10.1 192.168.10.1 ---
服务器:  dns.long90.cn
Address:  192.168.10.1

名称:    dns.long90.cn
Address:  192.168.10.1


--- nslookup 192.168.10.4 192.168.10.1 ---
服务器:  dns.long90.cn
Address:  192.168.10.1

名称:    www.long90.cn
Address:  192.168.10.4


--- nslookup 192.168.10.5 192.168.10.1 ---
服务器:  dns.long90.cn
Address:  192.168.10.1

名称:    ftp.long90.cn
Address:  192.168.10.5


--- nslookup www.long90.cn 192.168.10.2 ---
nslookup.exe : 非权威应答:
所在位置 C:\Users\Lenovo\p8_host_nslookup_and_evidence.ps1:28 字符: 8
+   $o = & nslookup.exe $t[0] $t[1] 2>&1 | Out-String
+        ~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~
    + CategoryInfo          : NotSpecified: (非权威应答::String) [], RemoteException
    + FullyQualifiedErrorId : NativeCommandError


服务器:  mail.long90.cn
Address:  192.168.10.2

名称:    www.long90.cn
Address:  192.168.10.4


--- nslookup mail.long90.cn 192.168.10.2 ---
nslookup.exe : 非权威应答:
所在位置 C:\Users\Lenovo\p8_host_nslookup_and_evidence.ps1:28 字符: 8
+   $o = & nslookup.exe $t[0] $t[1] 2>&1 | Out-String
+        ~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~
    + CategoryInfo          : NotSpecified: (非权威应答::String) [], RemoteException
    + FullyQualifiedErrorId : NativeCommandError


服务器:  mail.long90.cn
Address:  192.168.10.2

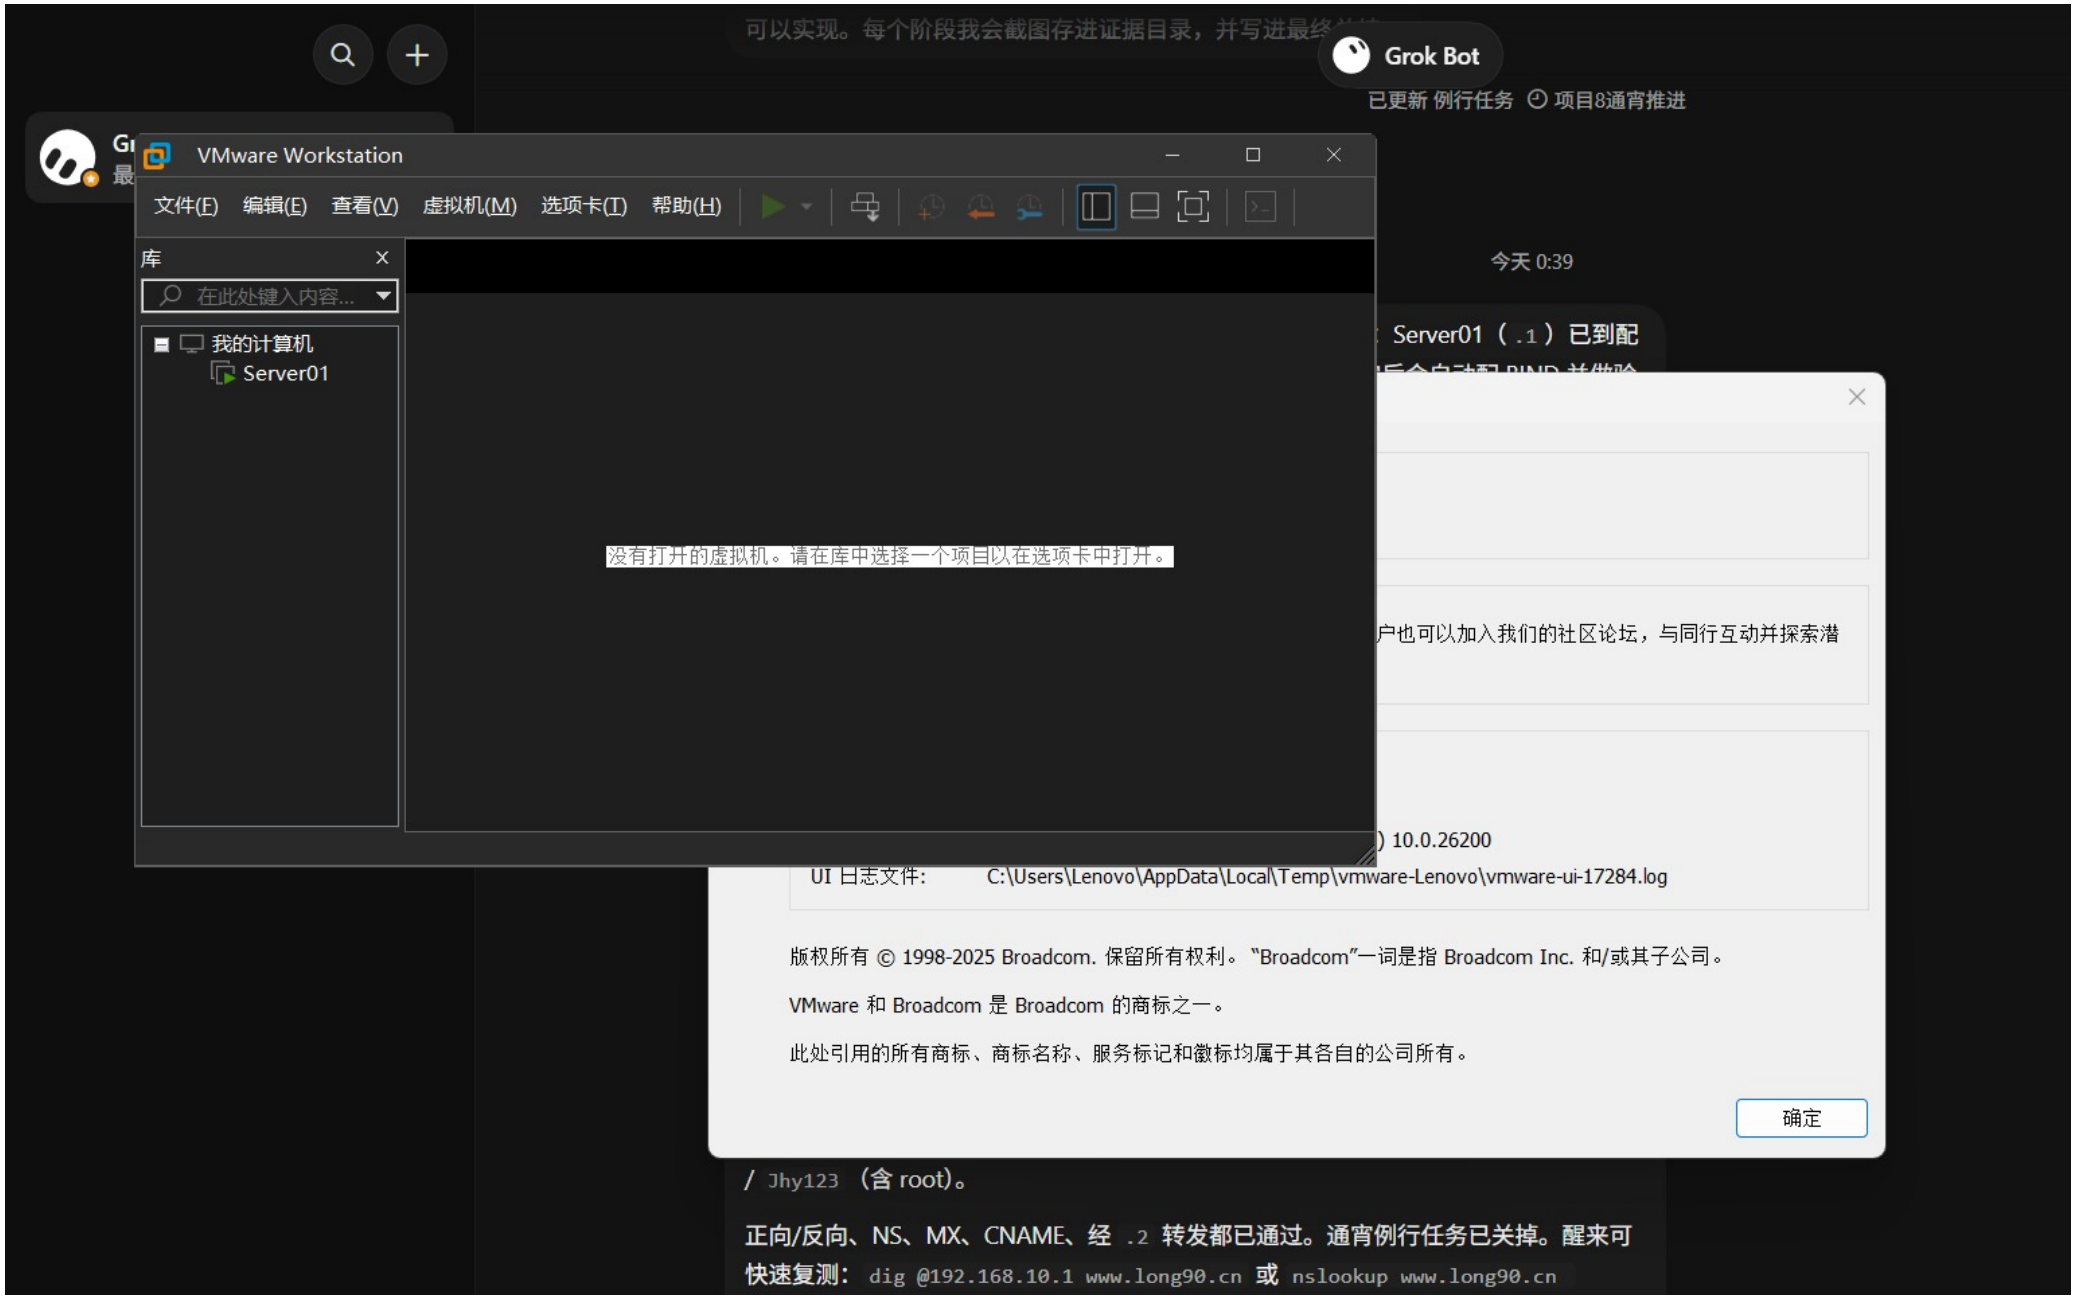
名称:    mail.long90.cn
Address:  192.168.10.2

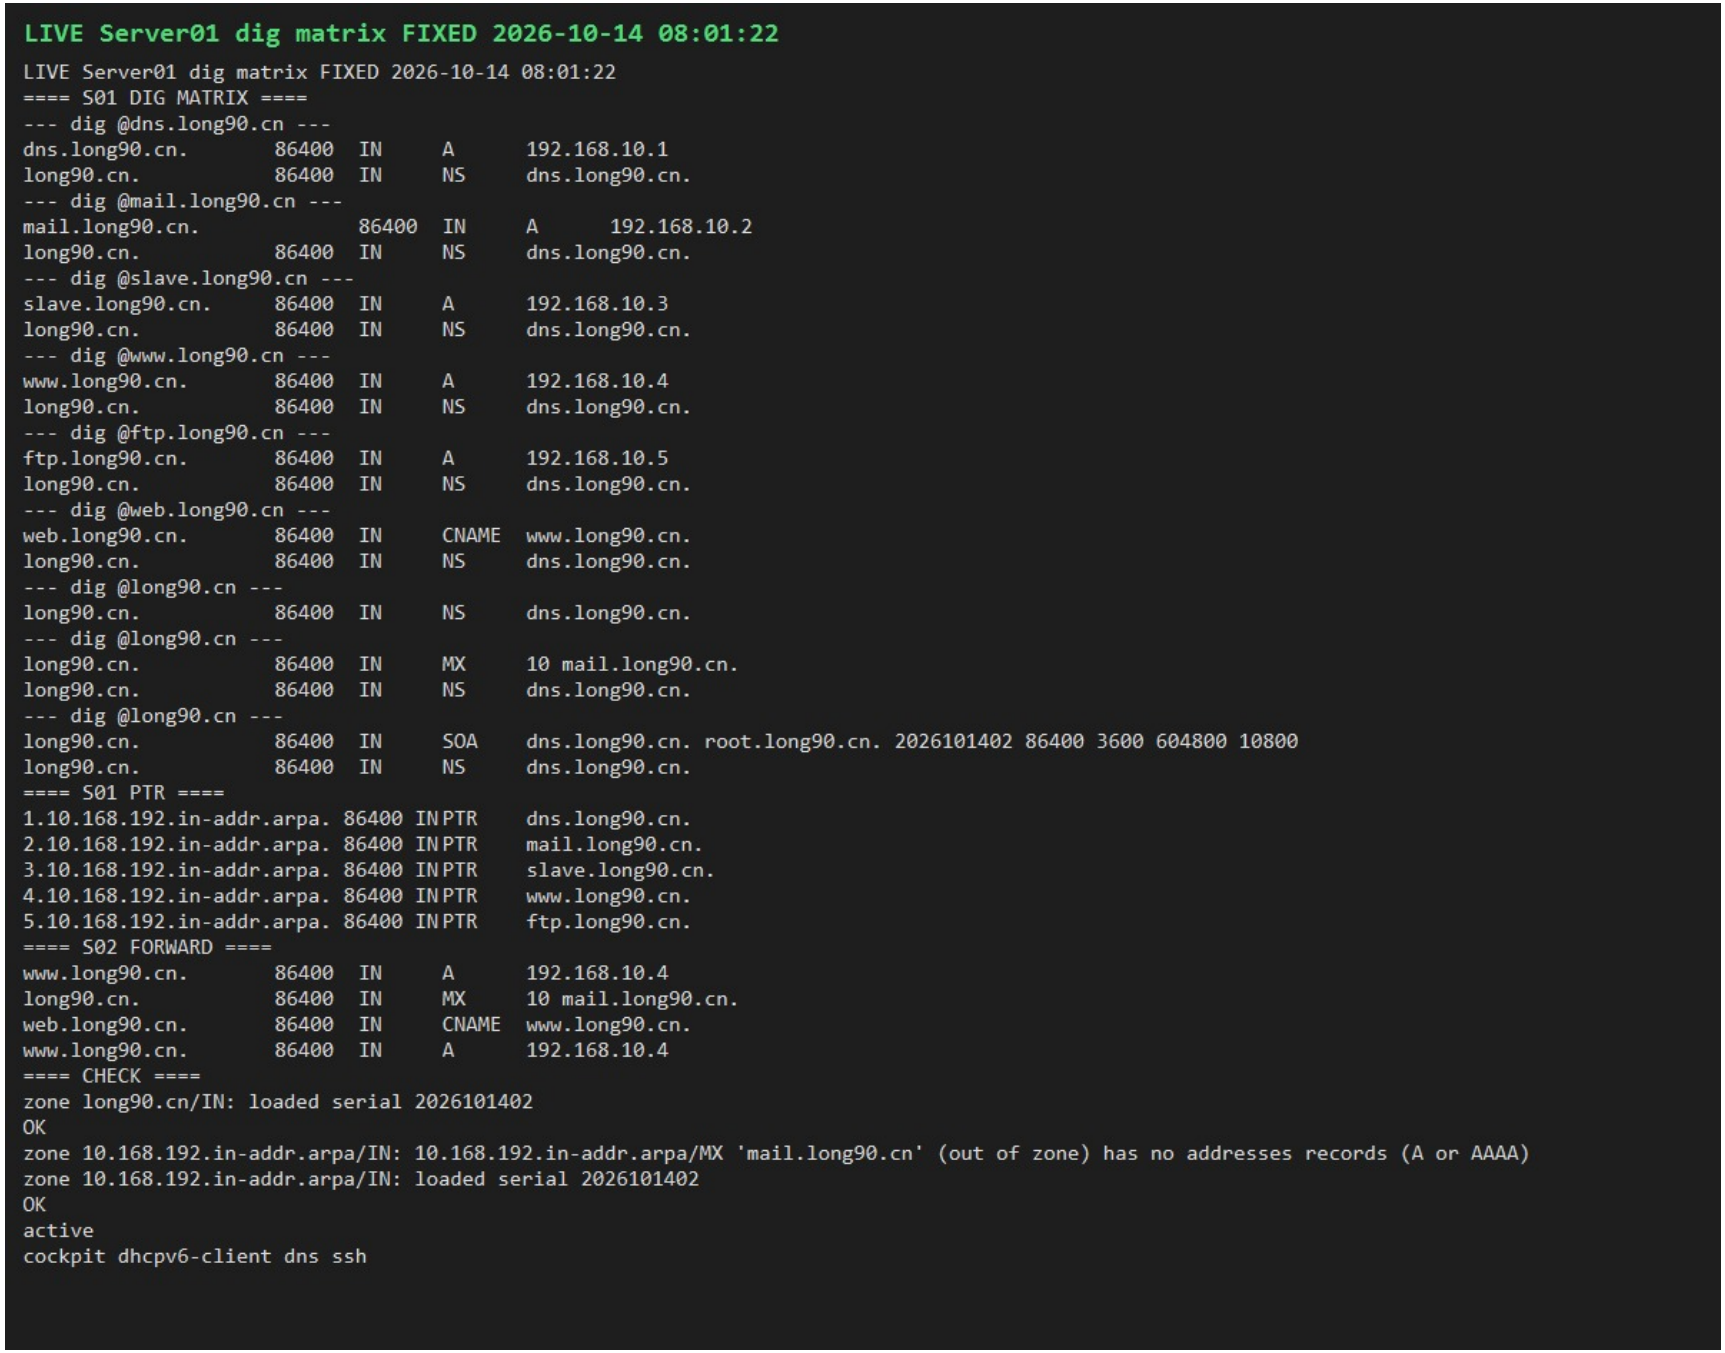

--- nslookup 192.168.10.4 192.168.10.2 ---
服务器:  mail.long90.cn
Address:  192.168.10.2

名称:    www.long90.cn
Address:  192.168.10.4
```

```
final_s02_named.conf
options {
    listen-on port 53 { any; };
    listen-on-v6 port 53 { any; };
    directory "/var/named";
    dump-file "/var/named/data/cache_dump.db";
    statistics-file "/var/named/data/named_stats.txt";
    memstatistics-file "/var/named/data/named_mem_stats.txt";
    allow-query { any; };
    recursion yes;
    forwarders { 192.168.10.1; };
    forward only;
    dnssec-validation no;
};

include "/etc/named.rfc1912.zones";
include "/etc/named.root.key";
```


可以实现。每个阶段我会截图存进证据目录，并写进最终
Grok Bot
已更新 例行任务 项目8通宵推进
VMware Workstation
文件(F) 编辑(E) 查看(V) 虚拟机(M) 选项卡(T) 帮助(H)
库
在此处键入内容...
我的计算机
Server01
没有打开的虚拟机。请在库中选择一个项目以在选项卡中打开。
今天 0:39
Server01（ .1 ）已到配
户也可以加入我们的社区论坛，与同行互动并探索潜
) 10.0.26200
UI 日志文件: C:\Users\Lenovo\AppData\Local\Temp\vmware-Lenovo\vmware-ui-17284.log
版权所有 © 1998-2025 Broadcom. 保留所有权利。"Broadcom"一词是指 Broadcom Inc. 和/或其子公司。
VMware 和 Broadcom 是 Broadcom 的商标之一。
此处引用的所有商标、商标名称、服务标记和徽标均属于其各自的公司所有。
确定
/ Jhy123 （含 root）。
正向/反向、NS、MX、CNAME、经 .2 转发都已通过。通宵例行任务已关掉。醒来可
快速复测： dig @192.168.10.1 www.long90.cn 或 nslookup www.long90.cn


LIVE Server01 dig matrix FIXED 2026-10-14 08:01:22
LIVE Server01 dig matrix FIXED 2026-10-14 08:01:22
==== S01 DIG MATRIX ====
--- dig @dns.long90.cn ---
dns.long90.cn. 86400 IN A 192.168.10.1
long90.cn. 86400 IN NS dns.long90.cn.
--- dig @mail.long90.cn ---
mail.long90.cn. 86400 IN A 192.168.10.2
long90.cn. 86400 IN NS dns.long90.cn.
--- dig @slave.long90.cn ---
slave.long90.cn. 86400 IN A 192.168.10.3
long90.cn. 86400 IN NS dns.long90.cn.
--- dig @www.long90.cn ---
www.long90.cn. 86400 IN A 192.168.10.4
long90.cn. 86400 IN NS dns.long90.cn.
--- dig @ftp.long90.cn ---
ftp.long90.cn. 86400 IN A 192.168.10.5
long90.cn. 86400 IN NS dns.long90.cn.
--- dig @web.long90.cn ---
web.long90.cn. 86400 IN CNAME www.long90.cn.
long90.cn. 86400 IN NS dns.long90.cn.
--- dig @long90.cn ---
long90.cn. 86400 IN NS dns.long90.cn.
--- dig @long90.cn ---
long90.cn. 86400 IN MX 10 mail.long90.cn.
long90.cn. 86400 IN NS dns.long90.cn.
--- dig @long90.cn ---
long90.cn. 86400 IN SOA dns.long90.cn. root.long90.cn. 2026101402 86400 3600 604800 10800
long90.cn. 86400 IN NS dns.long90.cn.
==== S01 PTR ====
1.10.168.192.in-addr.arpa. 86400 IN PTR dns.long90.cn.
2.10.168.192.in-addr.arpa. 86400 IN PTR mail.long90.cn.
3.10.168.192.in-addr.arpa. 86400 IN PTR slave.long90.cn.
4.10.168.192.in-addr.arpa. 86400 IN PTR www.long90.cn.
5.10.168.192.in-addr.arpa. 86400 IN PTR ftp.long90.cn.
==== S02 FORWARD ====
www.long90.cn. 86400 IN A 192.168.10.4
long90.cn. 86400 IN MX 10 mail.long90.cn.
web.long90.cn. 86400 IN CNAME www.long90.cn.
www.long90.cn. 86400 IN A 192.168.10.4
==== CHECK ====
zone long90.cn/IN: loaded serial 2026101402
OK
zone 10.168.192.in-addr.arpa/IN: 10.168.192.in-addr.arpa/MX 'mail.long90.cn' (out of zone) has no addresses records (A or AAAA)
zone 10.168.192.in-addr.arpa/IN: loaded serial 2026101402
OK
active
cockpit dhcpv6-client dns ssh

```
LIVE Server02 cache/forward FIXED 2026-10-14 08:01:22
LIVE Server02 cache/forward FIXED 2026-10-14 08:01:22
==== S02 ====
www.long90.cn.        86395  IN     A      192.168.10.4
long90.cn.            86395  IN     MX     10 mail.long90.cn.
dns.long90.cn.        86400  IN     A      192.168.10.1
4.10.168.192.in-addr.arpa. 86400 IN PTR    www.long90.cn.
active
cockpit dhcpv6-client dns ssh
    listen-on port 53 { any; };
    listen-on-v6 port 53 { none; };
    allow-query { any; };
    forwarders { 192.168.10.1; };
    forward only;
```

LIVE Client1 DNS FIXED 2026-10-14 08:01:22

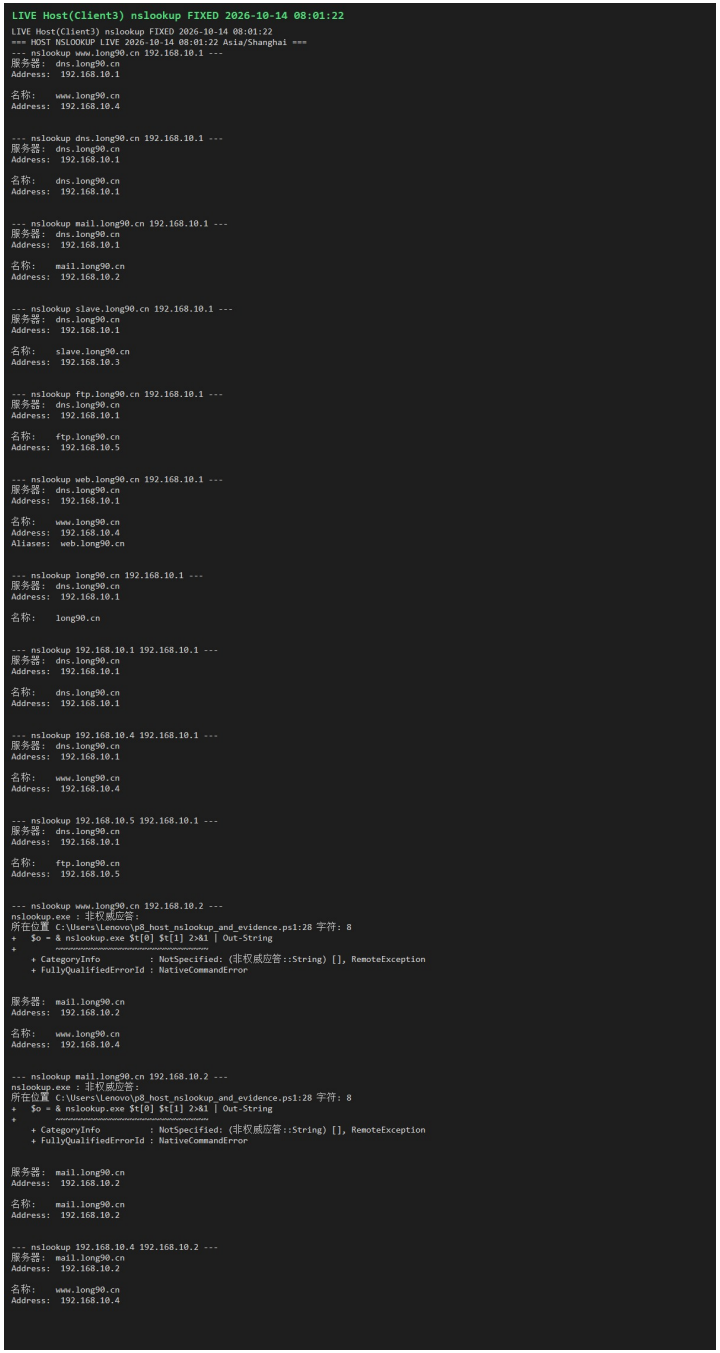
```
LIVE Client1 DNS FIXED 2026-10-14 08:01:22
==== CLIENT1 ====
# Generated by NetworkManager
search long90.cn
nameserver 192.168.10.1
nameserver 192.168.10.2
www.long90.cn.       86400  IN     A      192.168.10.4
www.long90.cn.       86394  IN     A      192.168.10.4
www.long90.cn.       86400  IN     A      192.168.10.4
Using domain server:
Name: 192.168.10.1
Address: 192.168.10.1#53
Aliases:

web.long90.cn is an alias for www.long90.cn.
www.long90.cn has address 192.168.10.4
Server:       192.168.10.1
Address:      192.168.10.1#53

Name:  ftp.long90.cn
Address: 192.168.10.5

Server:       192.168.10.2
Address:      192.168.10.2#53

Non-authoritative answer:
Name:  www.long90.cn
Address: 192.168.10.4
```


LIVE Host(Client3) nslookup FIXED 2026-10-14 08:01:22
LIVE Host(Client3) nslookup FIXED 2026-10-14 08:01:22
=== HOST NSLOOKUP LIVE 2026-10-14 08:01:22 Asia/Shanghai ===
--- nslookup www.long90.cn 192.168.10.1 ---
服务器: dns.long90.cn
Address: 192.168.10.1
名称: www.long90.cn
Address: 192.168.10.4
--- nslookup dns.long90.cn 192.168.10.1 ---
服务器: dns.long90.cn
Address: 192.168.10.1
名称: dns.long90.cn
Address: 192.168.10.1
--- nslookup mail.long90.cn 192.168.10.1 ---
服务器: dns.long90.cn
Address: 192.168.10.1
名称: mail.long90.cn
Address: 192.168.10.2
--- nslookup slave.long90.cn 192.168.10.1 ---
服务器: dns.long90.cn
Address: 192.168.10.1
名称: slave.long90.cn
Address: 192.168.10.3
--- nslookup ftp.long90.cn 192.168.10.1 ---
服务器: dns.long90.cn
Address: 192.168.10.1
名称: ftp.long90.cn
Address: 192.168.10.5
--- nslookup web.long90.cn 192.168.10.1 ---
服务器: dns.long90.cn
Address: 192.168.10.1
名称: www.long90.cn
Address: 192.168.10.4
Aliases: web.long90.cn
--- nslookup long90.cn 192.168.10.1 ---
服务器: dns.long90.cn
Address: 192.168.10.1
名称: long90.cn
--- nslookup 192.168.10.1 192.168.10.1 ---
服务器: dns.long90.cn
Address: 192.168.10.1
名称: dns.long90.cn
Address: 192.168.10.1
--- nslookup 192.168.10.4 192.168.10.1 ---
服务器: dns.long90.cn
Address: 192.168.10.1
名称: www.long90.cn
Address: 192.168.10.4
--- nslookup 192.168.10.5 192.168.10.1 ---
服务器: dns.long90.cn
Address: 192.168.10.1
名称: ftp.long90.cn
Address: 192.168.10.5
--- nslookup www.long90.cn 192.168.10.2 ---
nslookup.exe : 非权威应答:
所在位置 C:\Users\Lenovo\p8_host_nslookup_and_evidence.ps1:28 字符: 8
+ $o = & nslookup.exe $t[0] $t[1] 2>&1 | Out-String
+   ~~~~~~
    + CategoryInfo   : NotSpecified: (非权威应答:::String) [], RemoteException
    + FullyQualifiedErrorId : NativeCommandError
服务器: mail.long90.cn
Address: 192.168.10.2
名称: www.long90.cn
Address: 192.168.10.4
--- nslookup mail.long90.cn 192.168.10.2 ---
nslookup.exe : 非权威应答:
所在位置 C:\Users\Lenovo\p8_host_nslookup_and_evidence.ps1:28 字符: 8
+ $o = & nslookup.exe $t[0] $t[1] 2>&1 | Out-String
+   ~~~~~~
    + CategoryInfo   : NotSpecified: (非权威应答:::String) [], RemoteException
    + FullyQualifiedErrorId : NativeCommandError
服务器: mail.long90.cn
Address: 192.168.10.2
名称: mail.long90.cn
Address: 192.168.10.2
--- nslookup 192.168.10.4 192.168.10.2 ---
服务器: mail.long90.cn
Address: 192.168.10.2
名称: www.long90.cn
Address: 192.168.10.4