



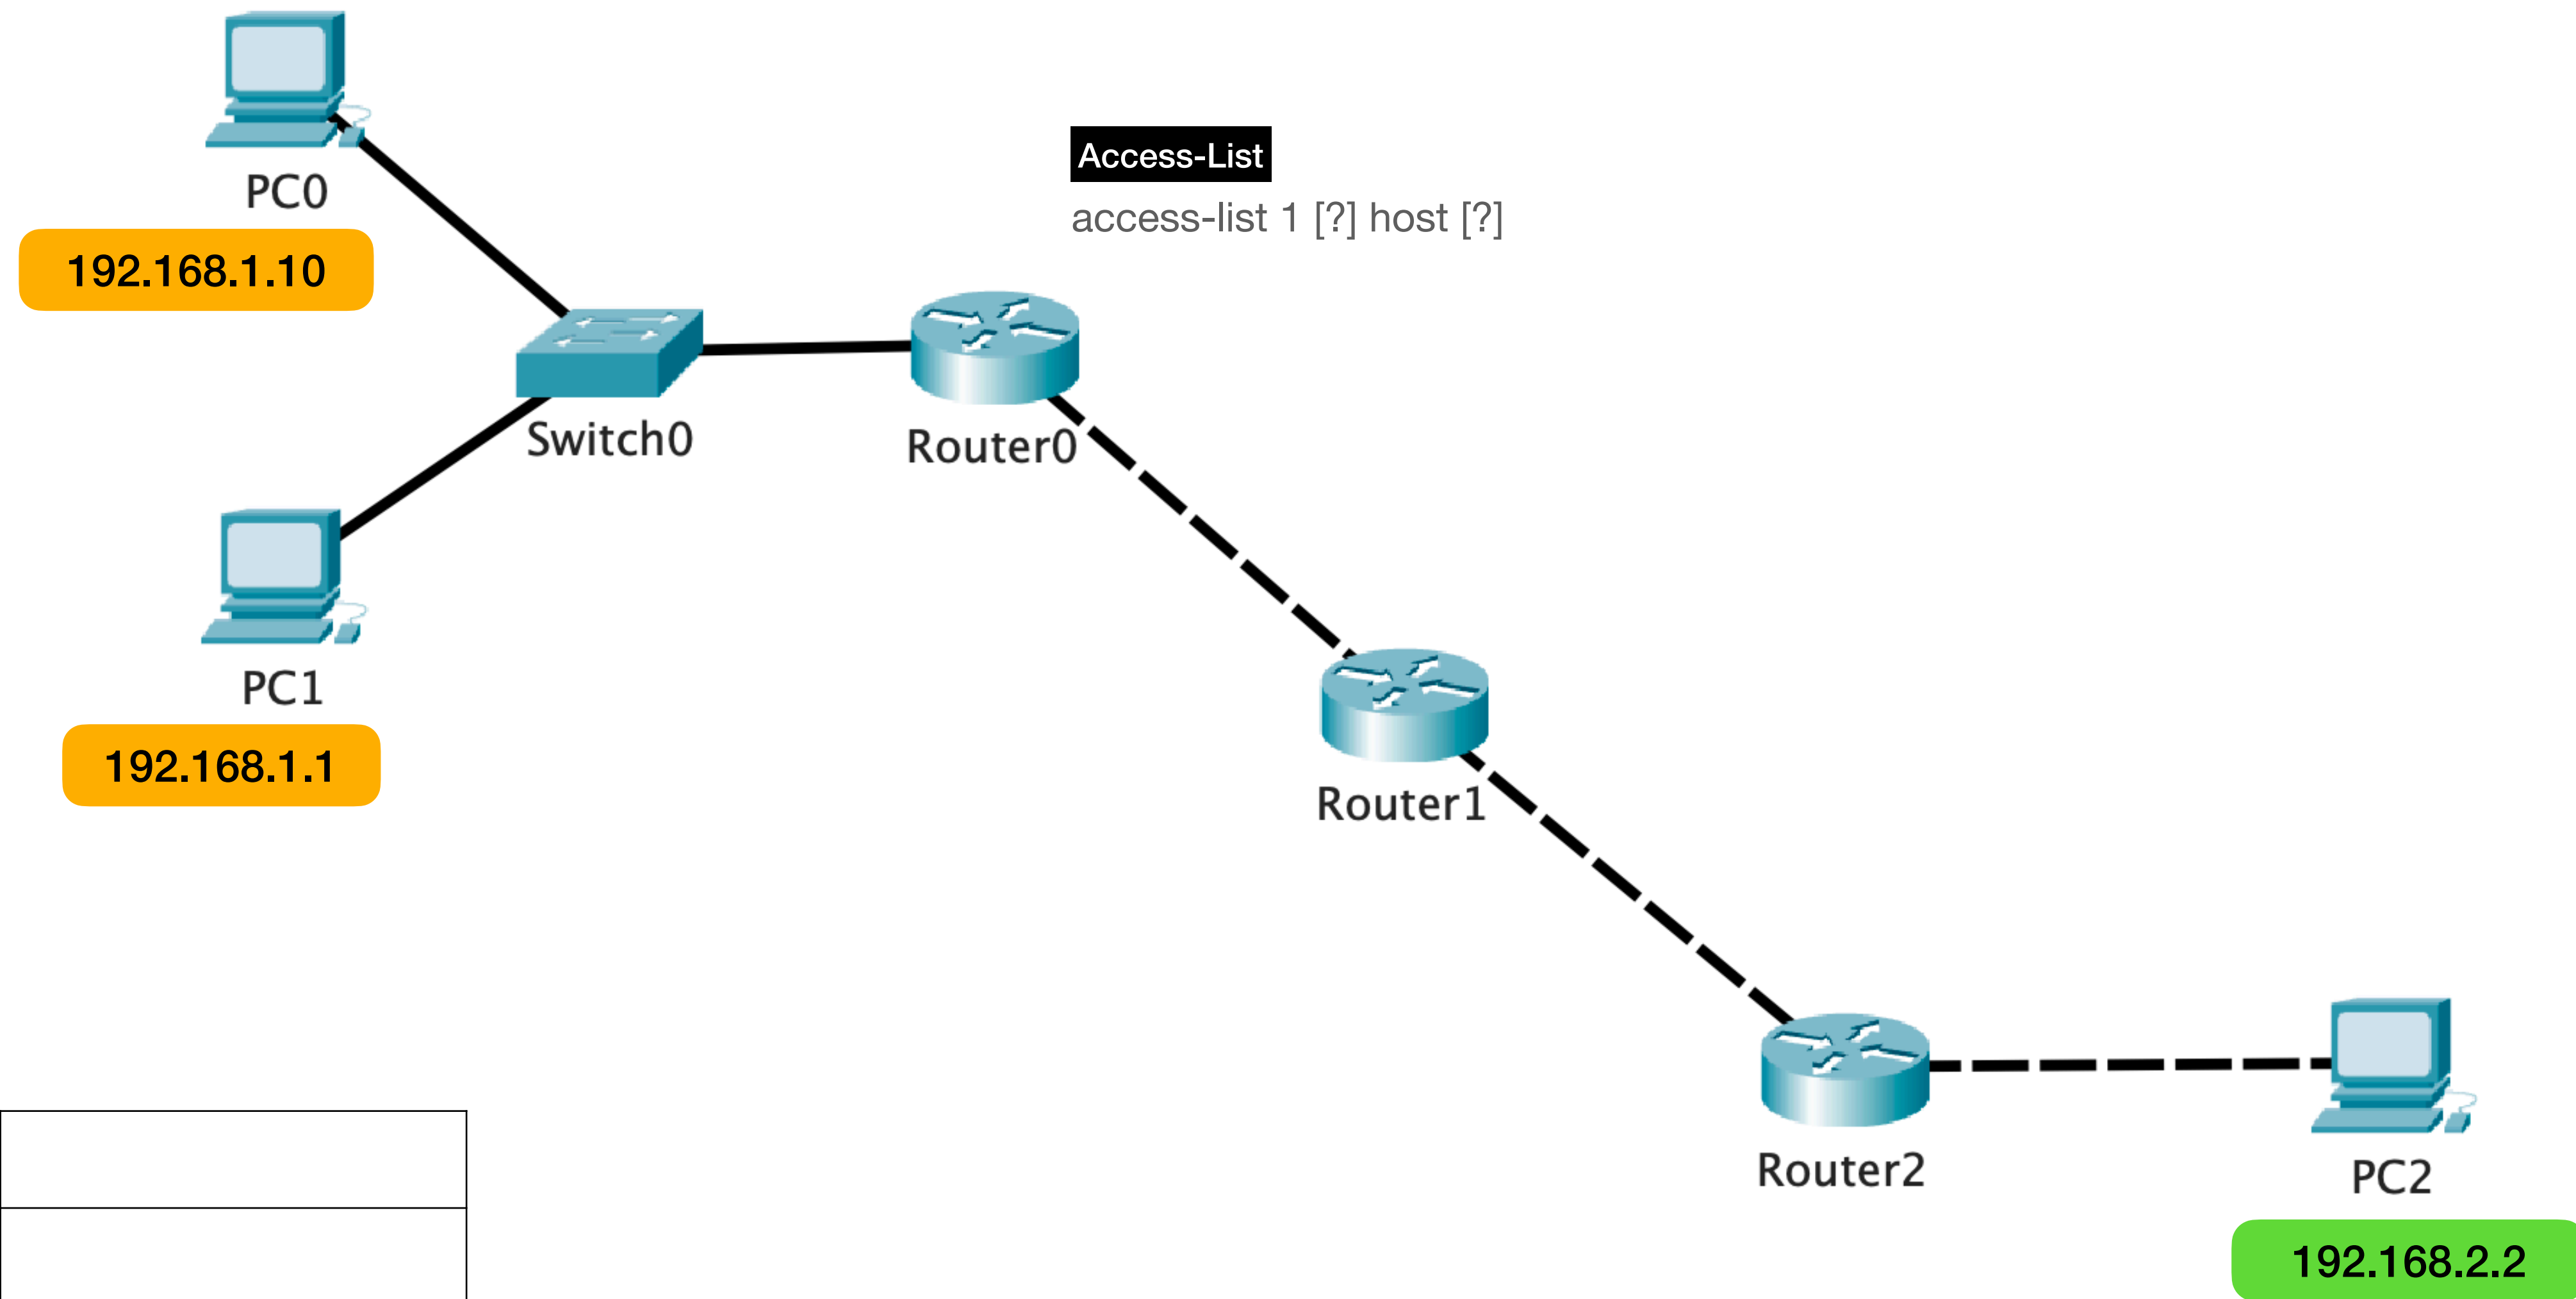

Standard ACL Syntax: `access-list [ID] [permit/deny] [source IP]`

Write a standard ACL to achieve the following goals:

- Block PC0 from talking to PC2
- Allow PC1 to talk to PC2

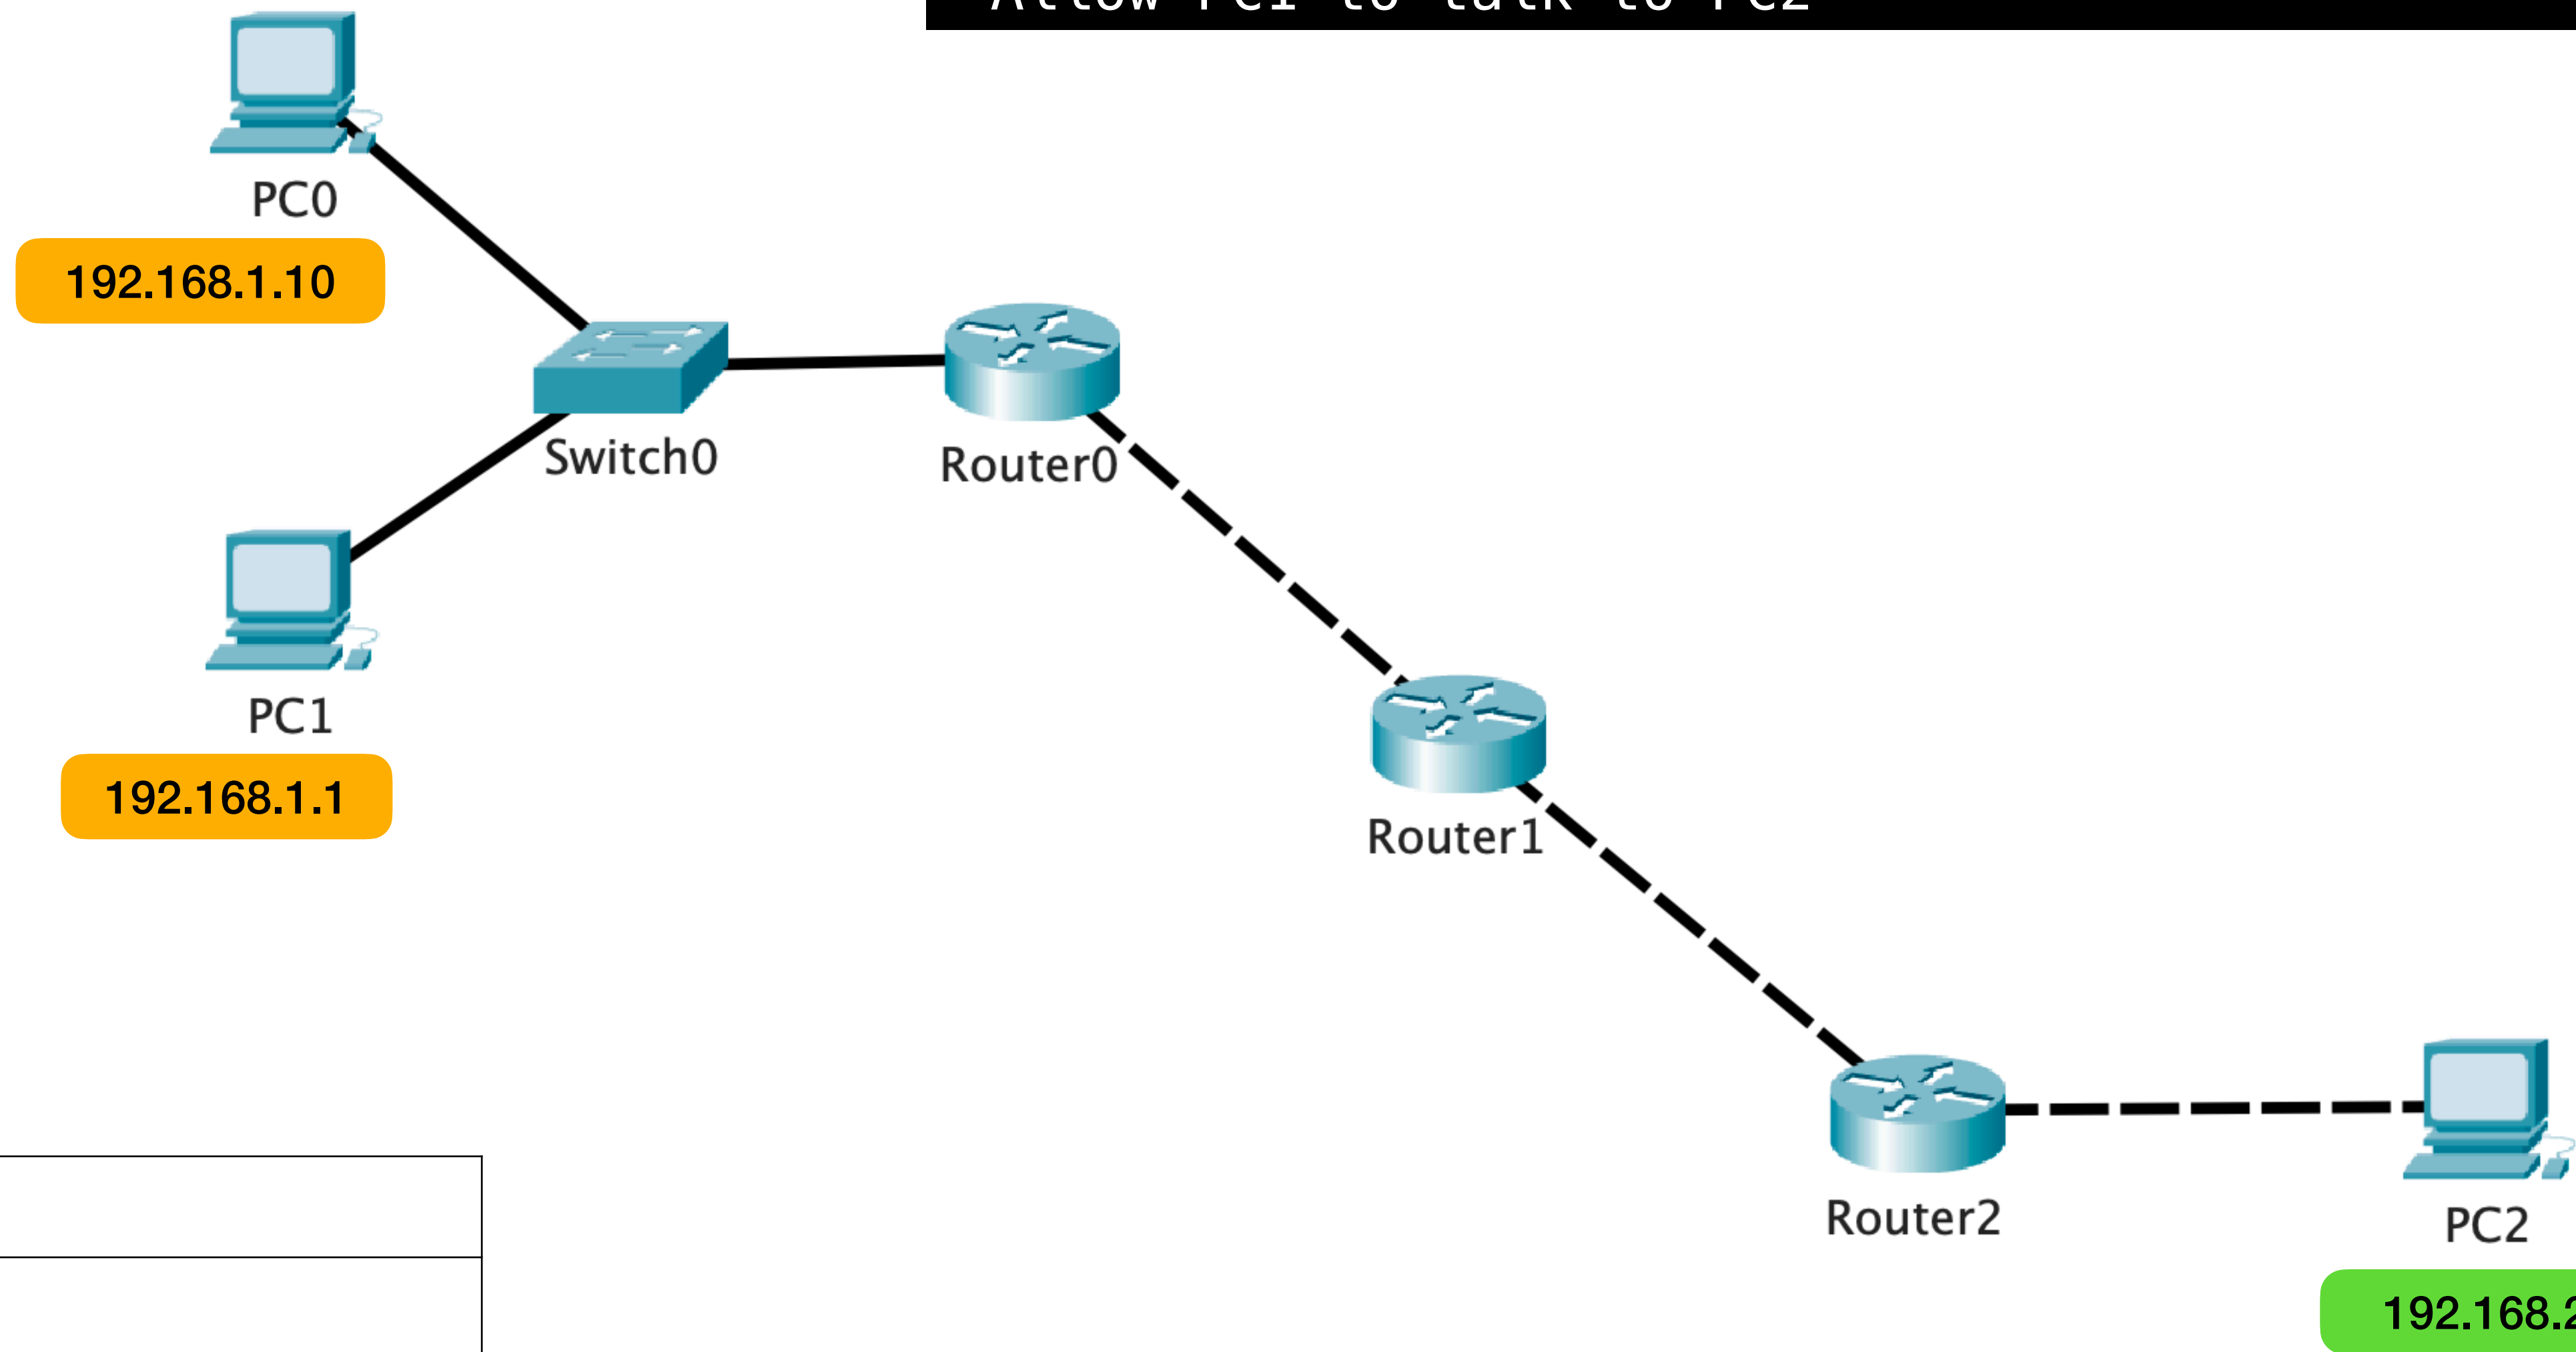


SrcIP	
DestIP	

Standard ACL Syntax: `access-list [ID] [permit/deny] [source IP]`

BLACKLIST METHOD

Write a standard ACL to achieve the following goals:

- Block PC0 from talking to PC2
- Allow PC1 to talk to PC2

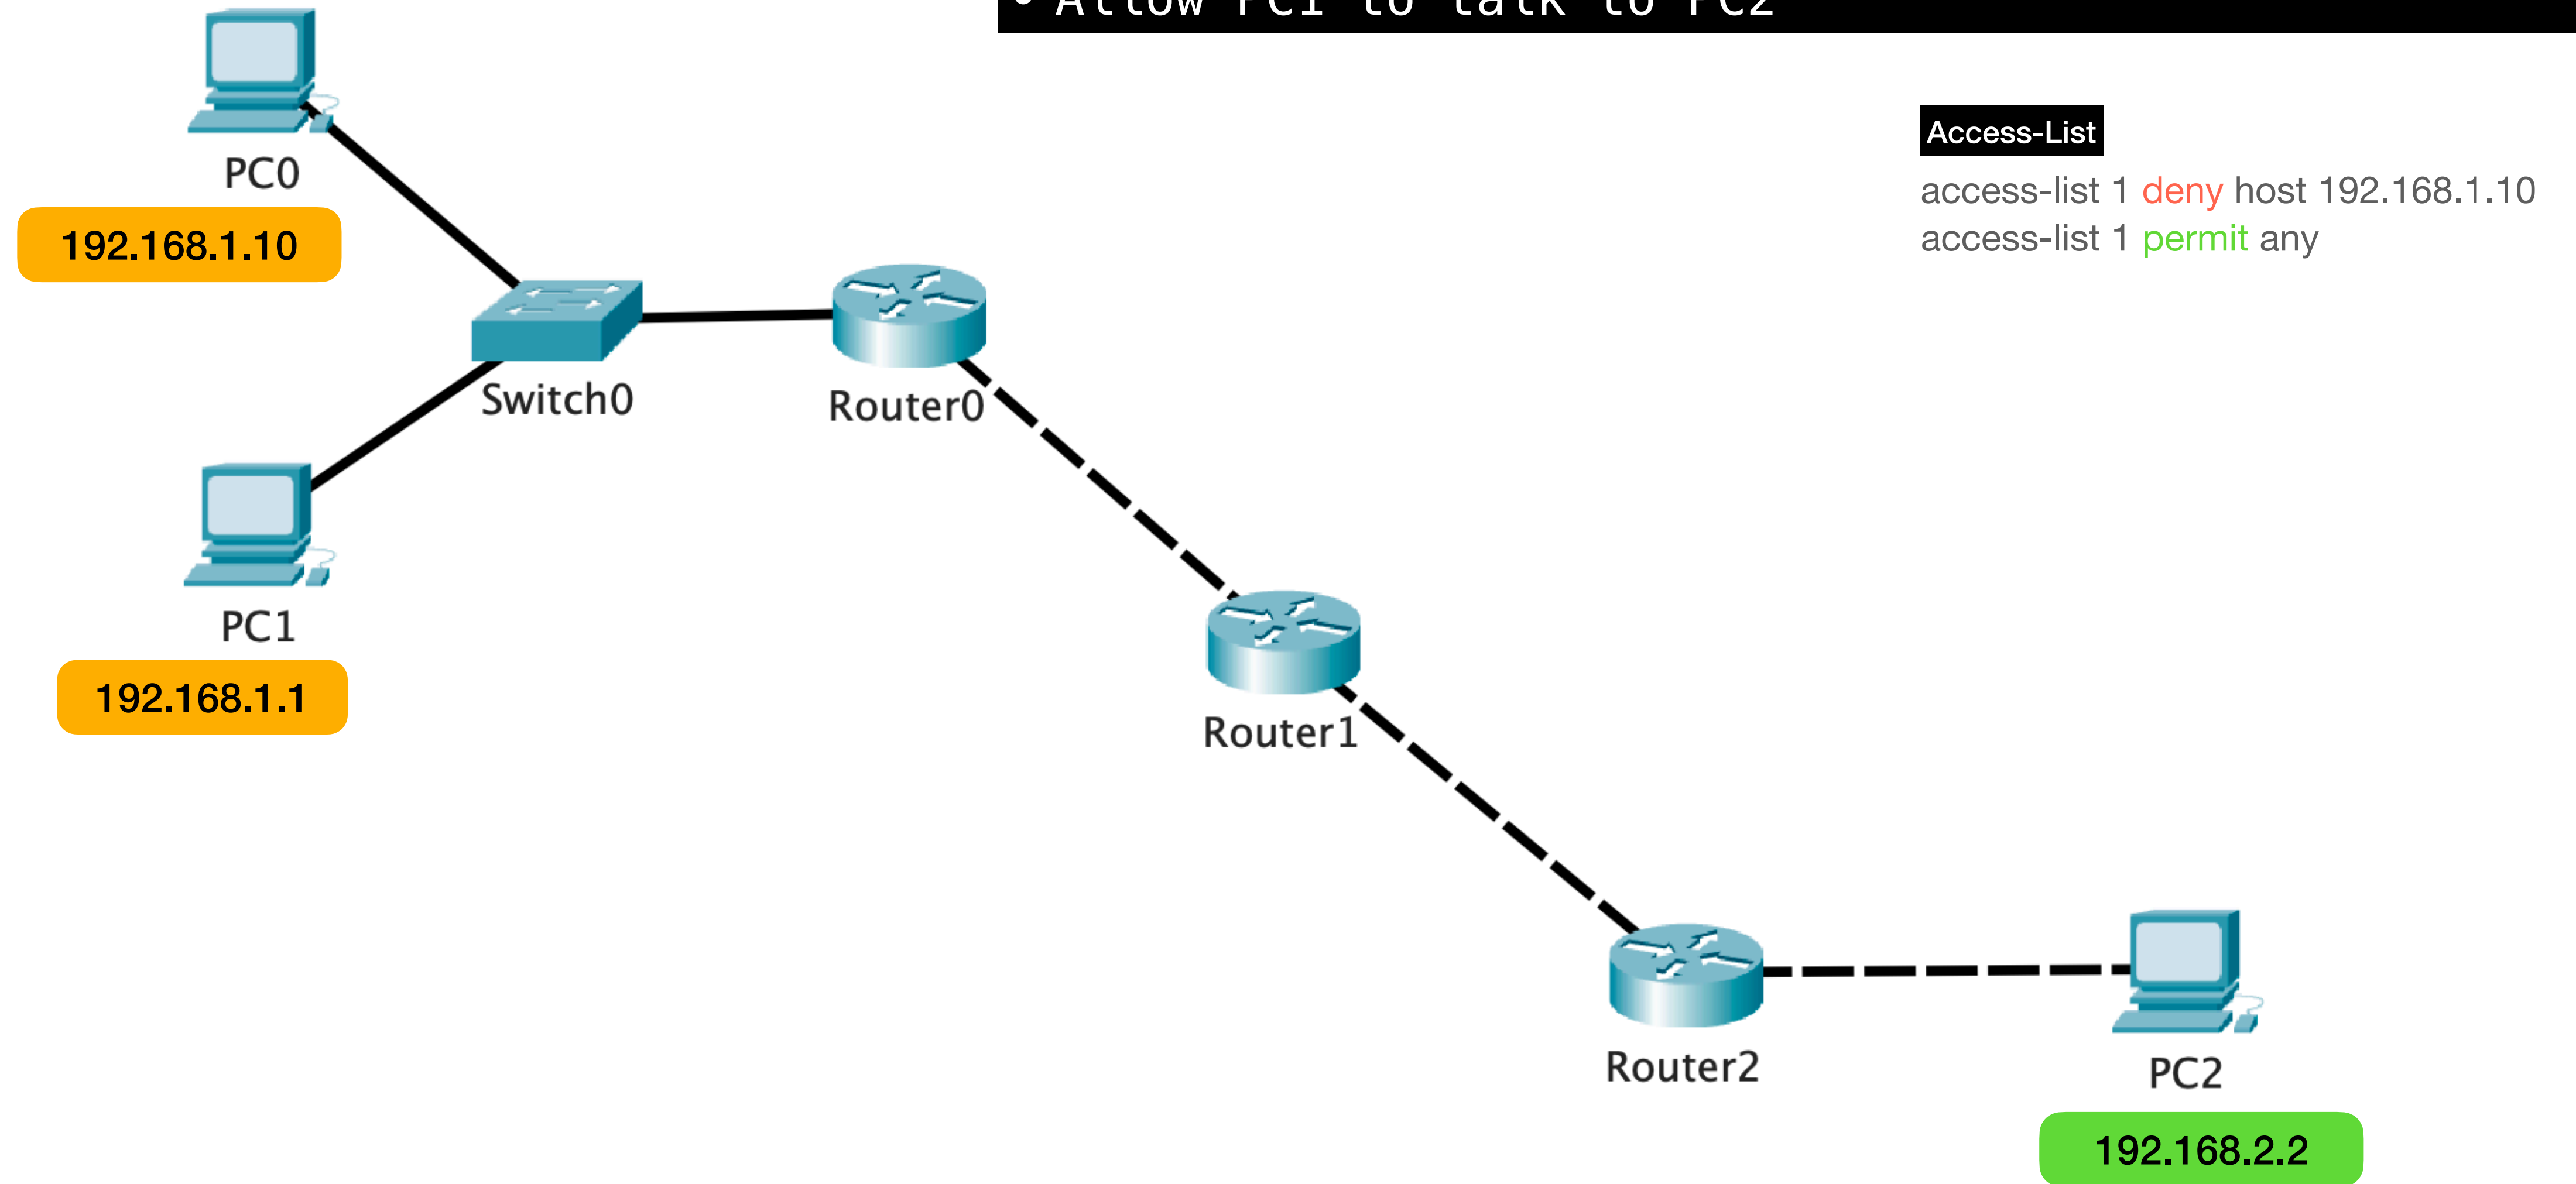


Standard ACL Syntax: `access-list [ID] [permit/deny] [source IP]`

WHITELIST METHOD

Write a standard ACL to achieve the following goals:

- Block PC0 from talking to PC2
- Allow PC1 to talk to PC2

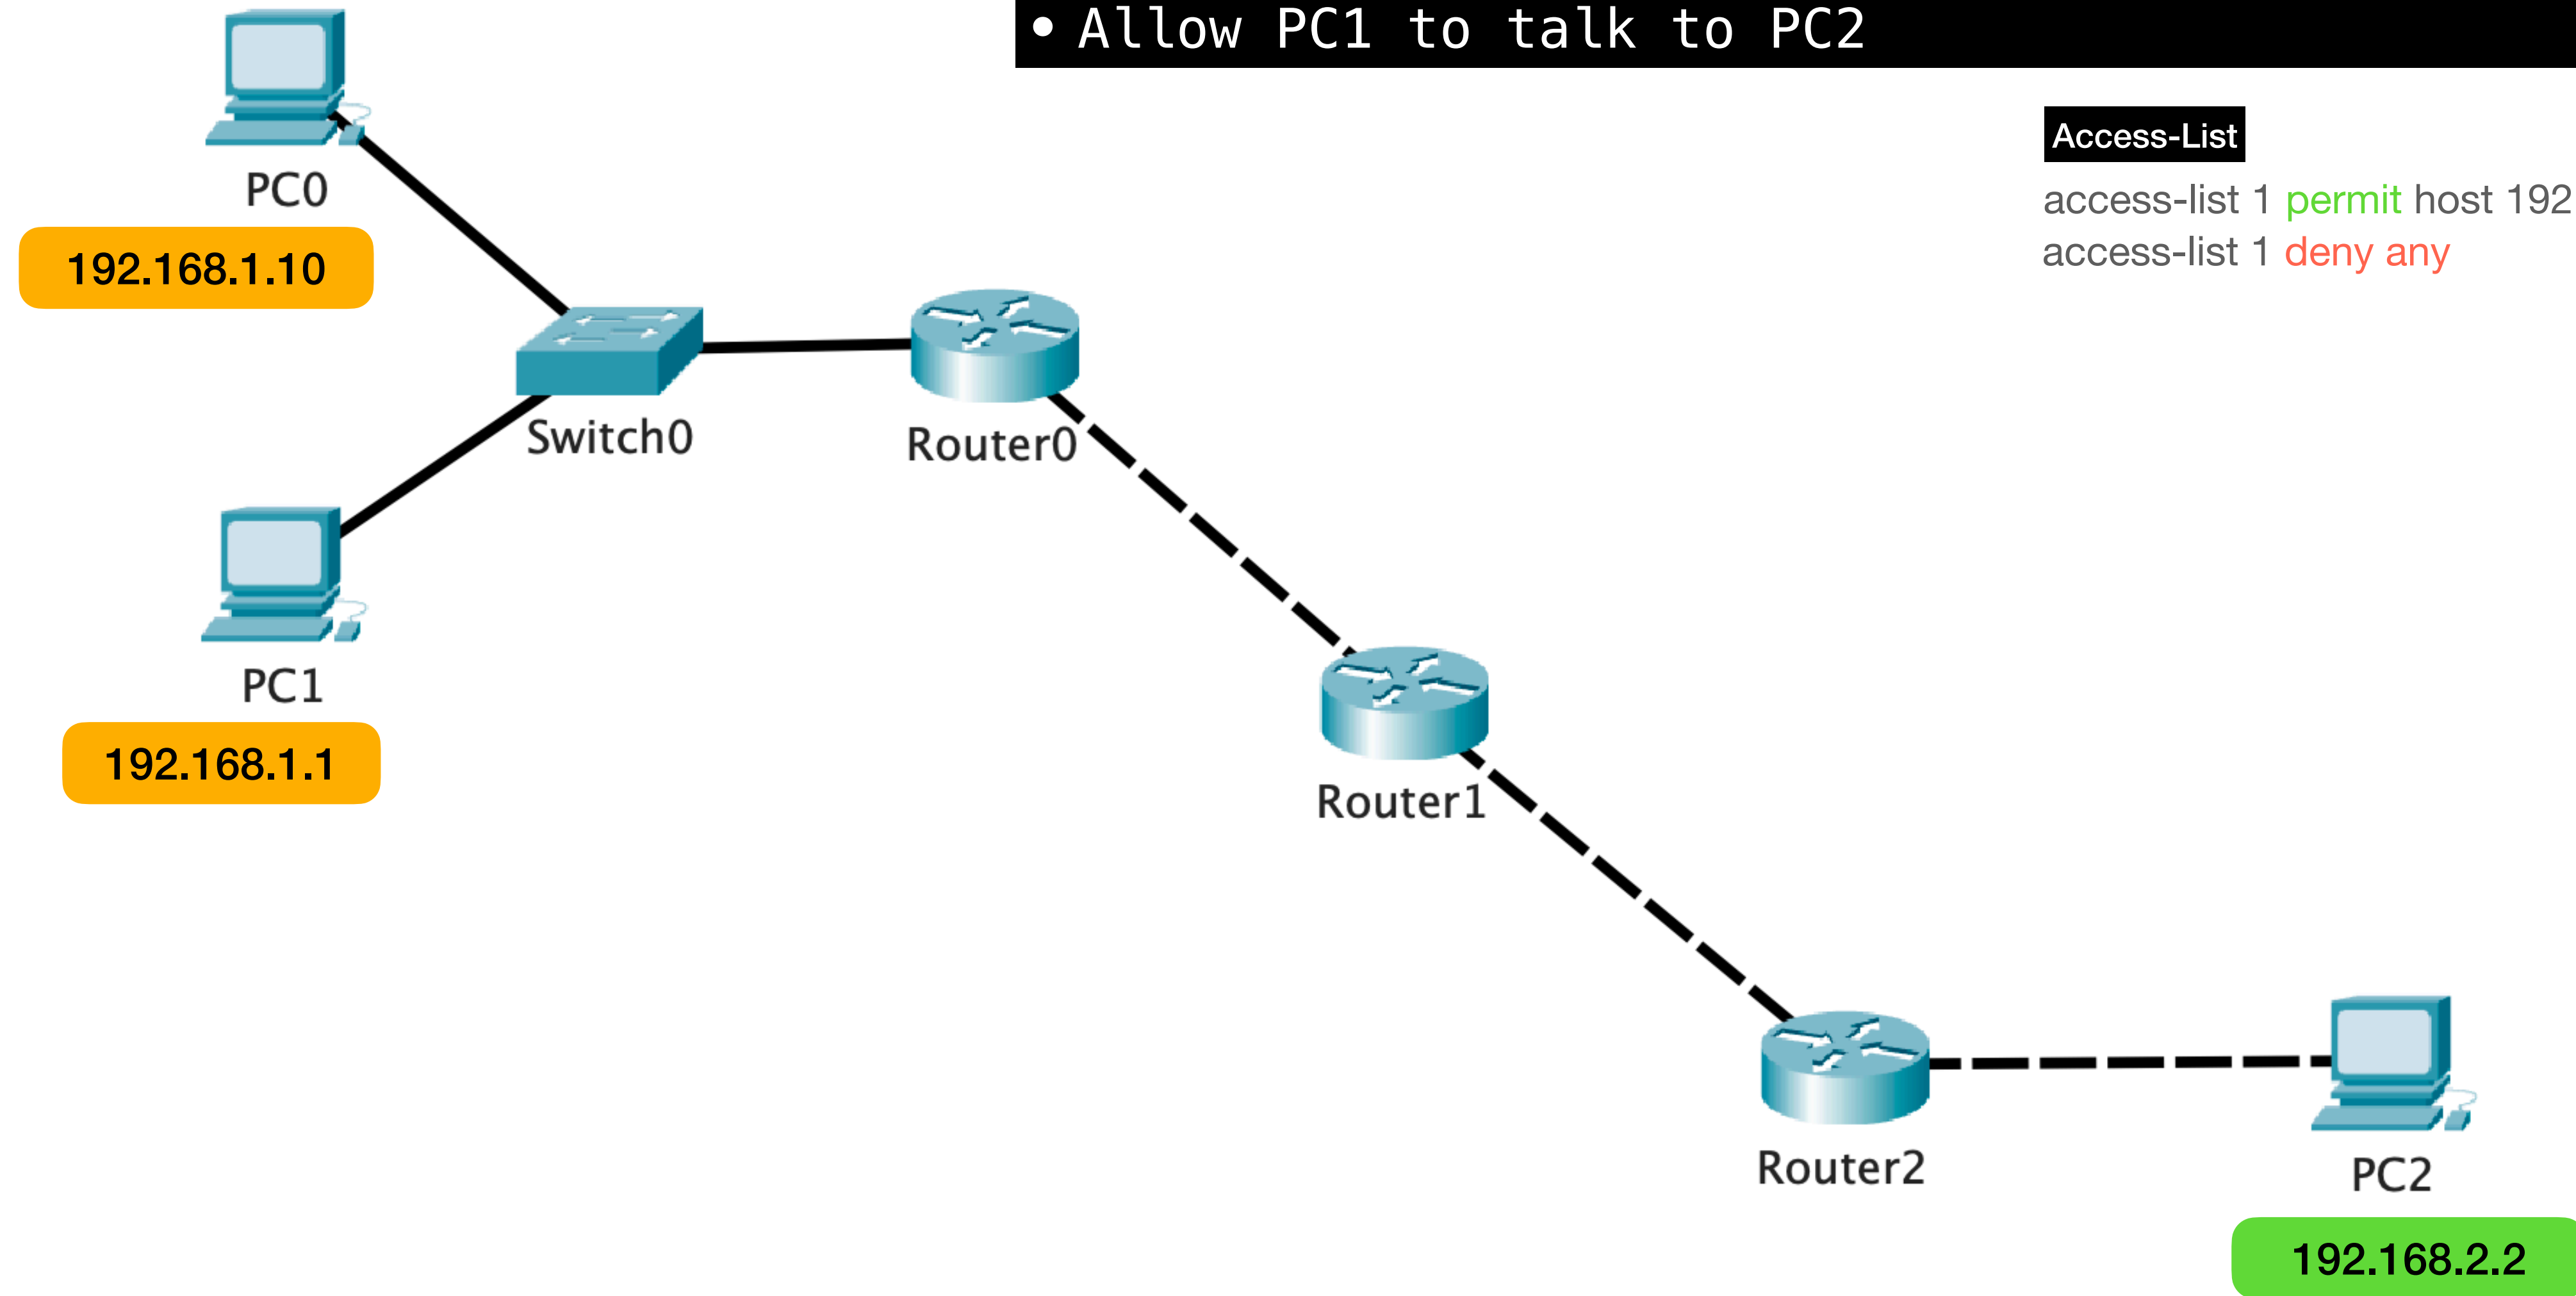


Access-List

```
access-list 1 permit host 192.168.1.1  
access-list 1 deny any
```

Standard ACL Syntax: `access-list [ID] [permit/deny] [source IP]`

Write a standard ACL to achieve the following goals:


- Block PC0 from talking to PC2
- Allow PC1 to talk to PC2
- Allow PC3 to talk to PC2

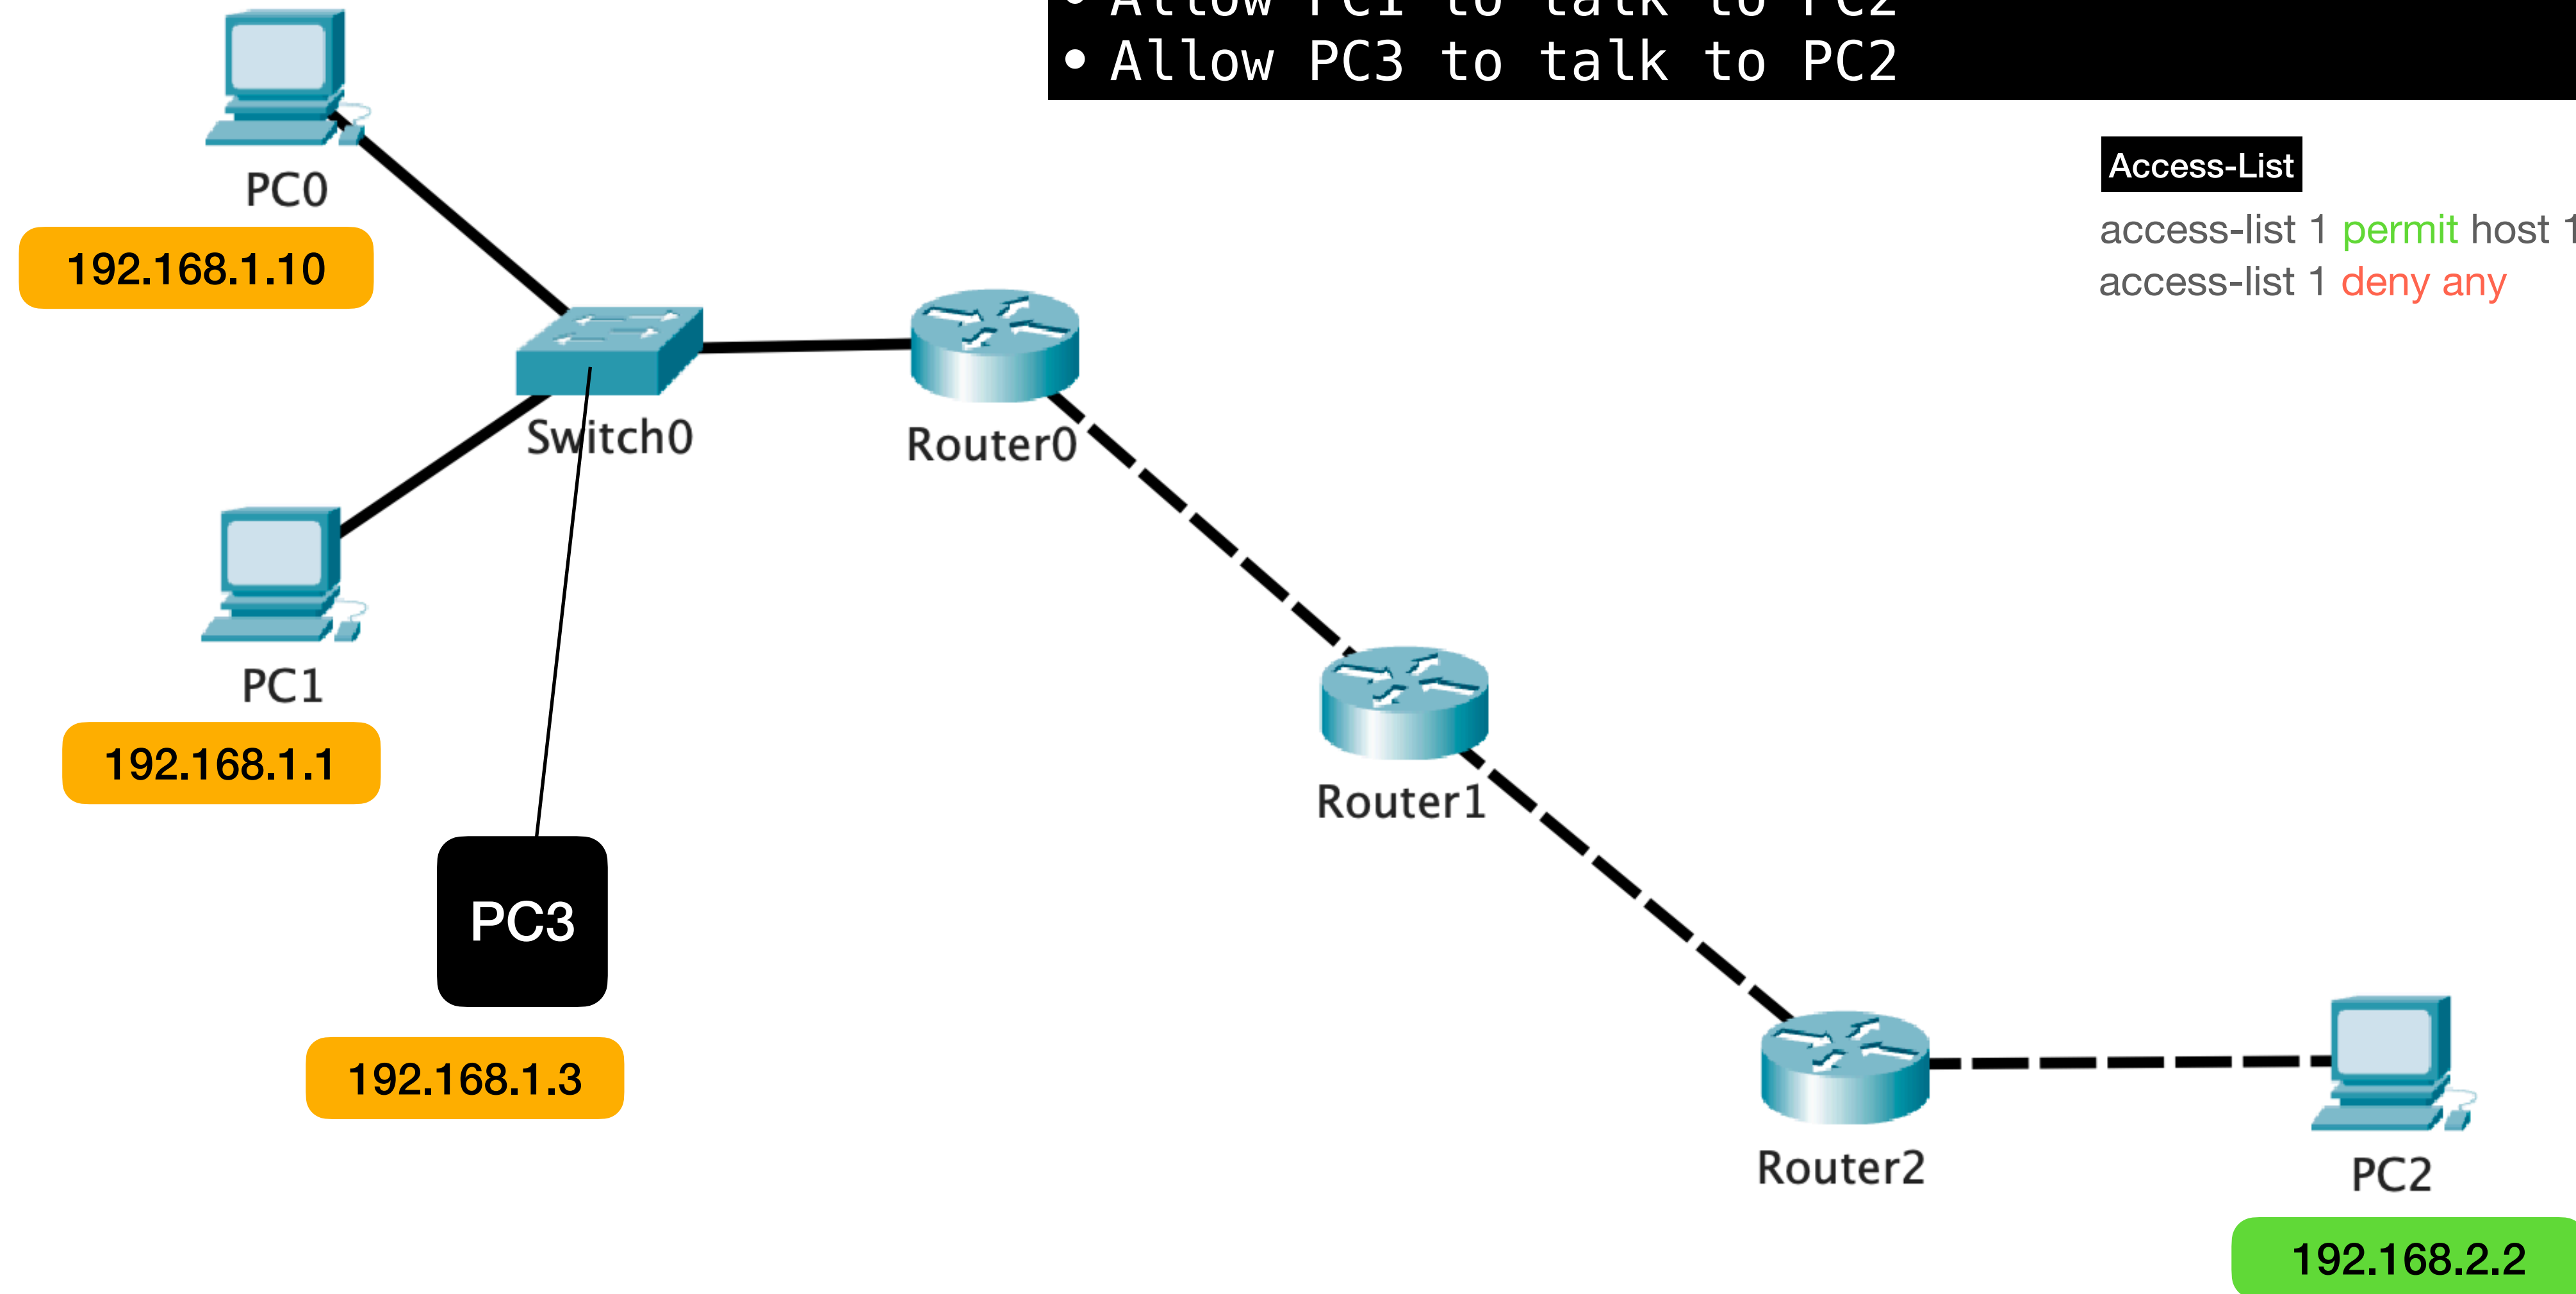

Access-List

```
access-list 1 permit host 192.168.1.1  
access-list 1 deny any
```

Standard ACL Syntax: `access-list [ID] [permit/deny] [source IP]`

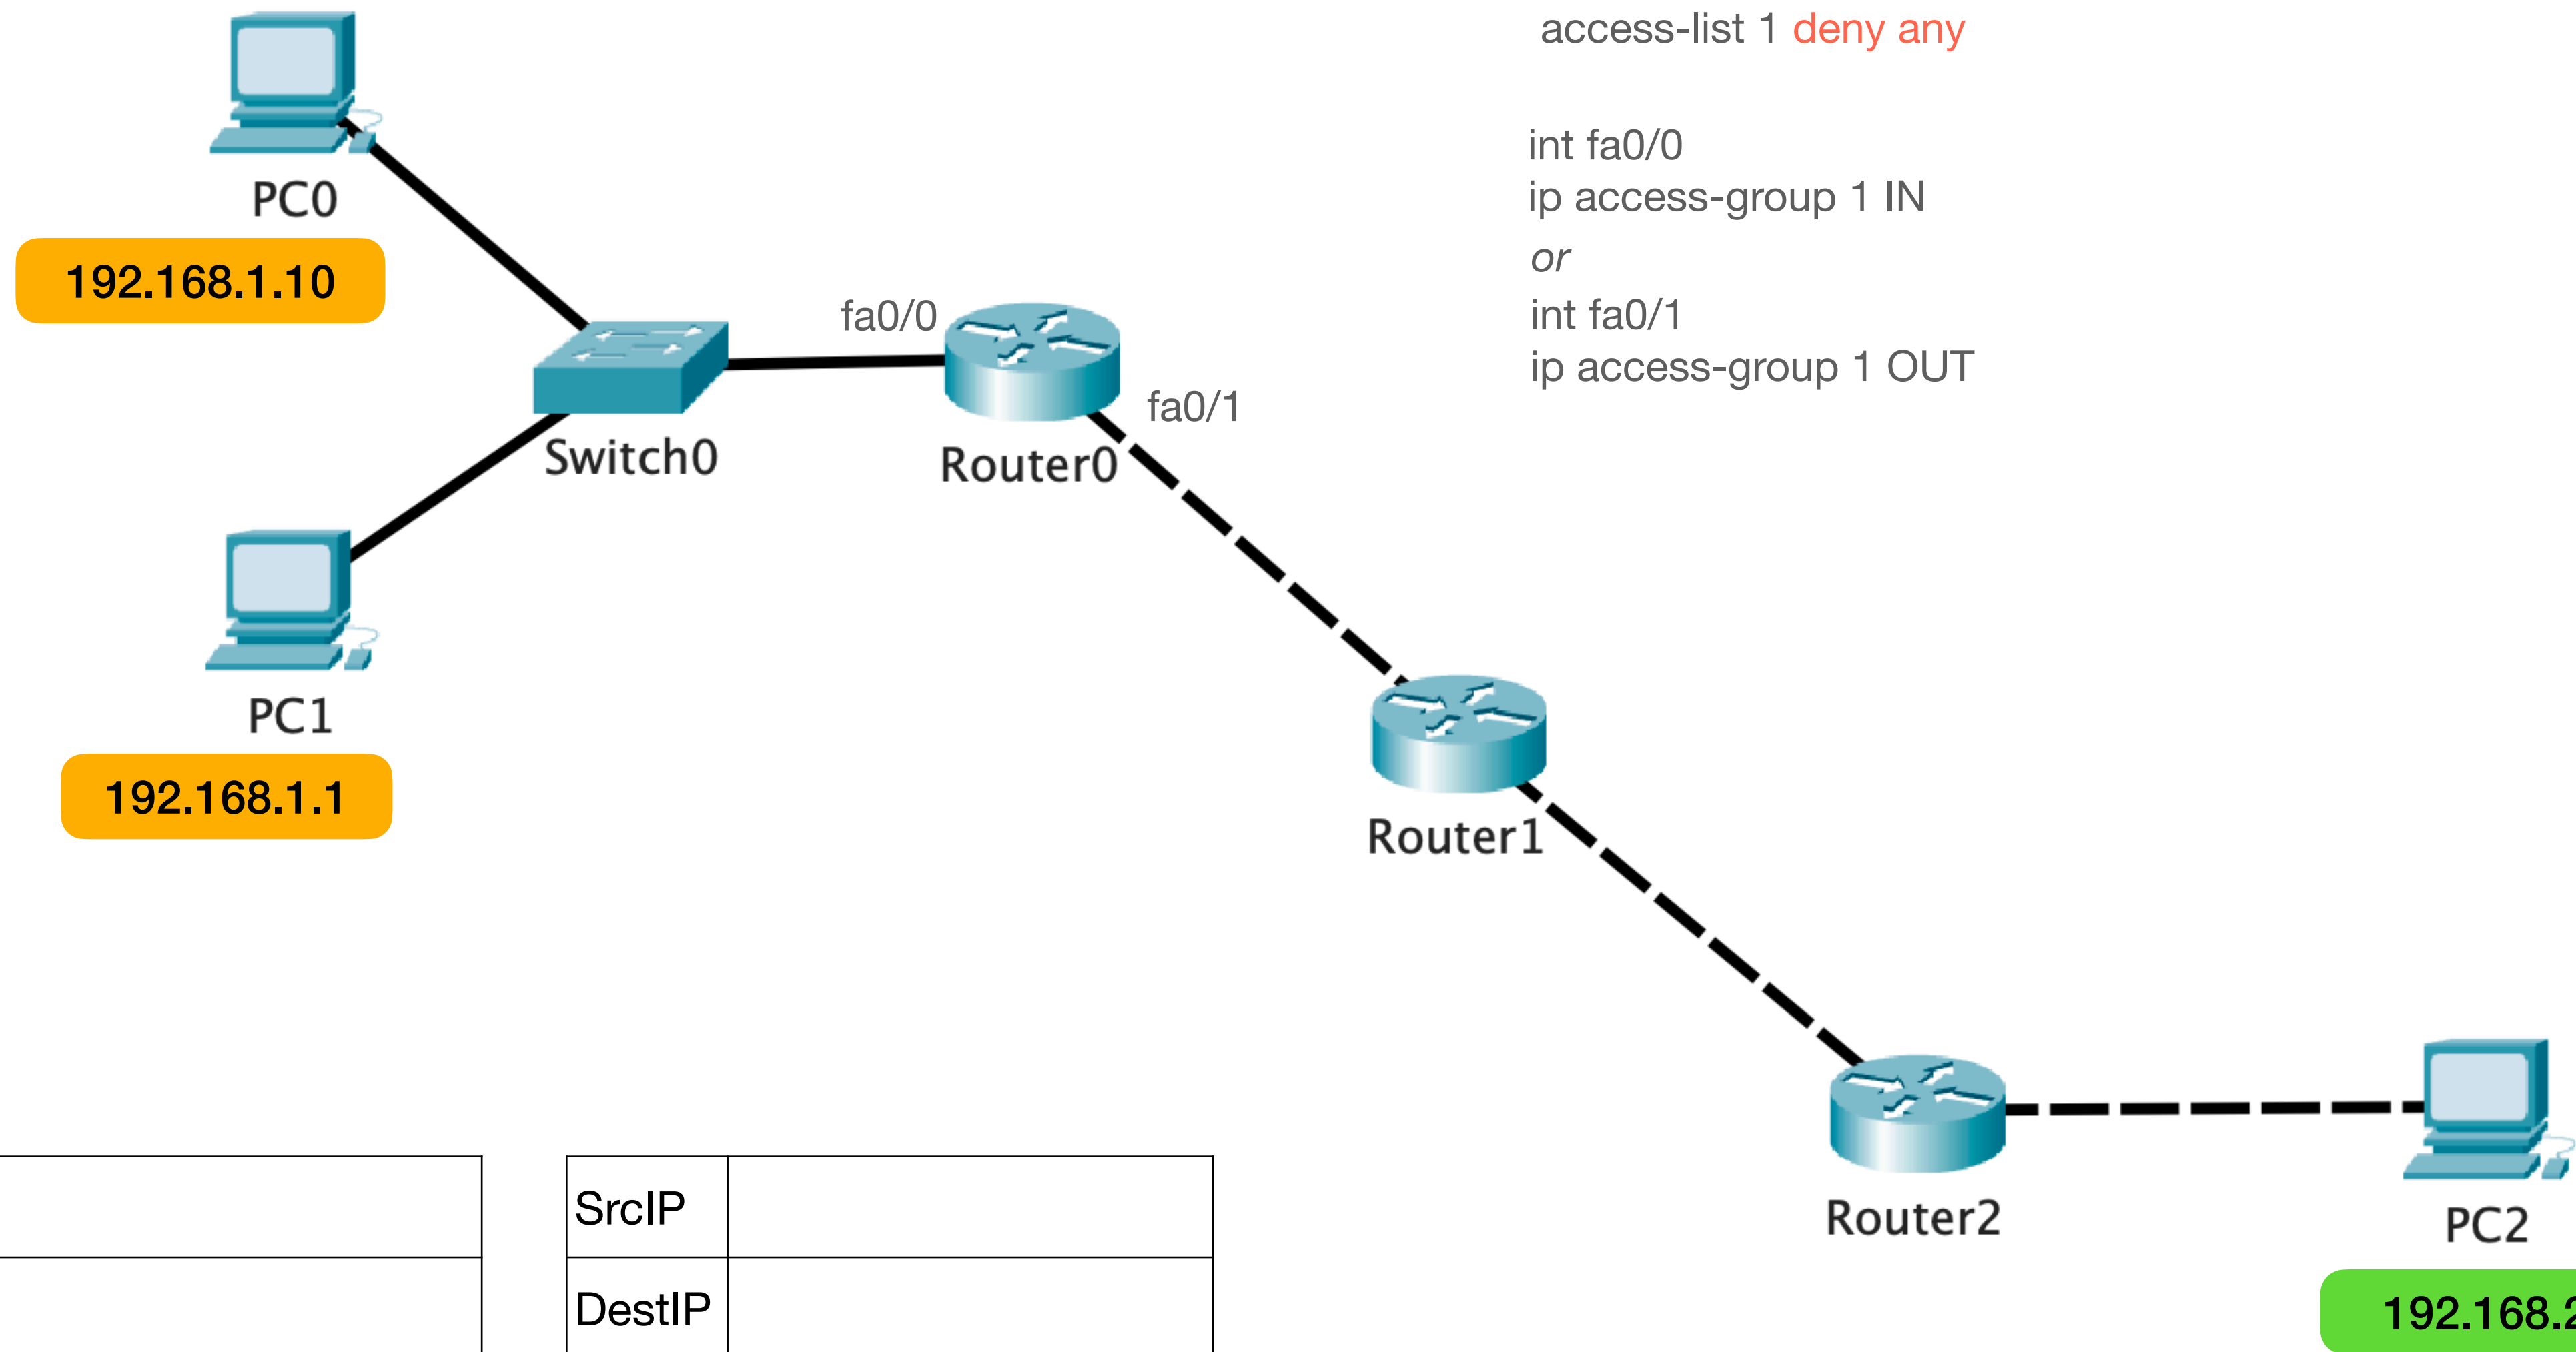

Access-List (R0)

```
access-list 1 permit host 192.168.1.1  
access-list 1 deny any
```

```
int fa0/0  
ip access-group 1 IN  
or  
int fa0/1  
ip access-group 1 OUT
```

SrcIP	
DestIP	

PC1->PC2

SrcIP	
DestIP	

PC2->PC1

Standard ACL Syntax: `ip access-group <ID> <IN/OUT>`