

Predicting Financial Time Series using Deep Learning

Module2. Recurrent Neural Network

Jongho Kim

NICE Pricing & Information Inc.


Fall, 2018

Note. This content mainly refers the summer session of KAIST organized by Jiyong Park(2018)

Recurrent Neural Network


Review: What is RNN?

- Unlike CNN, RNN can use past information to learn the present task.
 - Example: Natural Language Processing (NLP)
 - “The clouds are in the ().”
 - “I grew up in France I speak fluent ().”
 - Vanishing gradient problem
 - As that gap grows, RNN becomes unable to learn to connect the information.
(the past information would be vanishing or exploding)

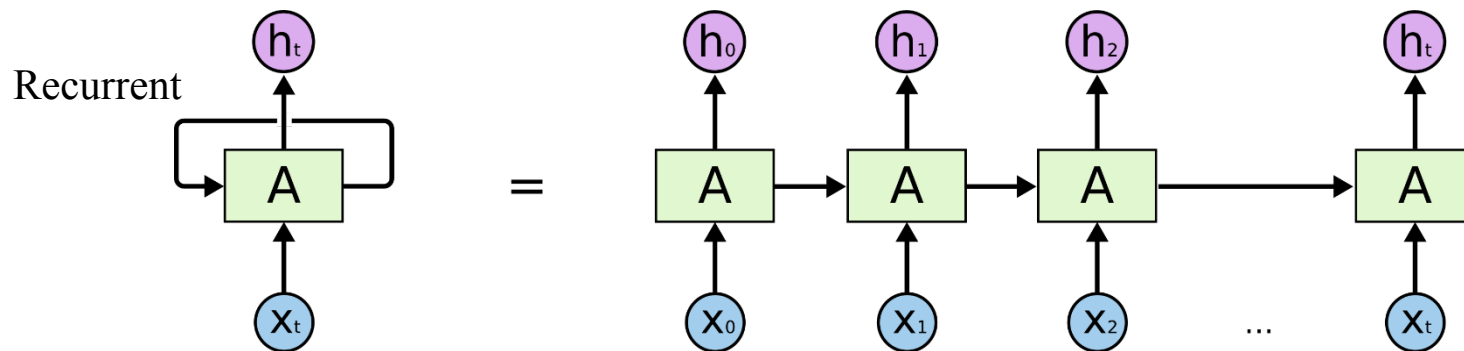


Review: What is RNN?

- Long Short-Term Memory (LSTM) and Gated Recurrent Unit (GRU) allows RNN to learn how much past information would pass to the next.

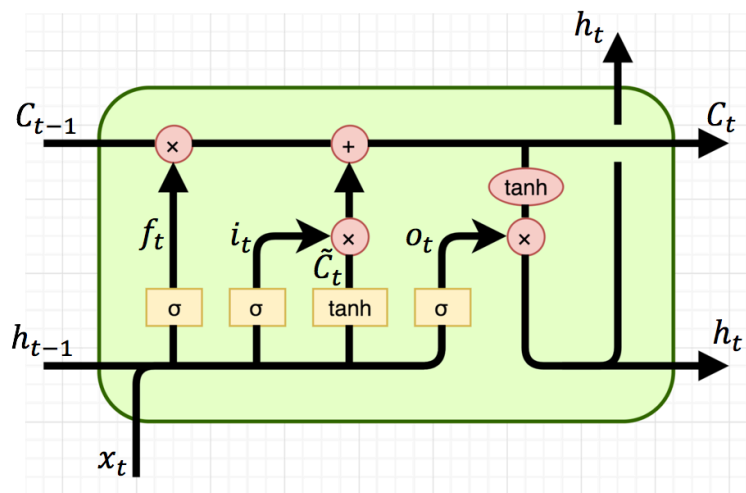

(a) Long Short-Term Memory

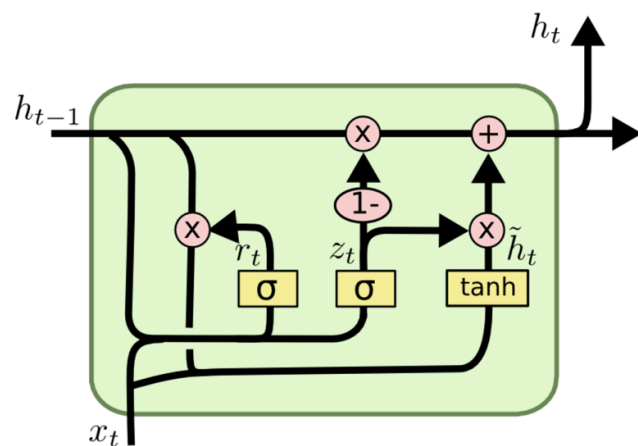

(b) Gated Recurrent Unit

- We can stack RNN, LSTM or GRU by passing a list of layer using Keras Sequential API

```
from keras.models import Sequential
from tensorflow.keras.layers import LSTM, GRU


model = Sequential()
model.add(LSTM(32, return_sequences=True, stateful=True,
              batch_input_shape=(batch_size, timesteps, data_dim)))
```

- Although RNN and GRU yield two states (output and hidden), LSTM yields three states (output, hidden, and cell)

```
from tensorflow.keras.layers import LSTM, GRU

encoder_outputs, h, c = LSTM(LATENT_DIM, name='encoder_lstm')(x)
encoder_outputs, h = GRU(LATENT_DIM, name='encoder_gru')(x)
```

Hands-on-Labs Recurrent Neural Network

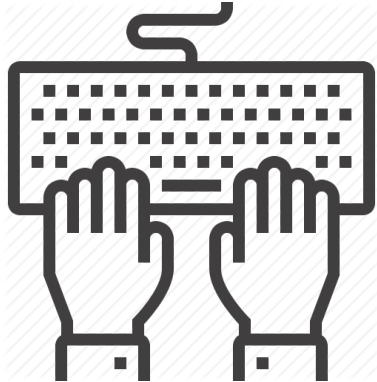

Recurrent Neural Network

Lab4_Recurrent Neural Network.ipynb


https://colab.research.google.com/drive/1RH5tnTrTPRZkWfNj7PAuPaM_E55coxwp

RNN Model for Image Classification

- Let's “pretend” the image is a sequence of vectors
- Height as Time / Width as Features



- Bidirectional Recurrent Neural Networks (BRNN) connects two hidden layers of opposite directions to the same output
- BRNNs were introduced to increase the amount of input information available to the network

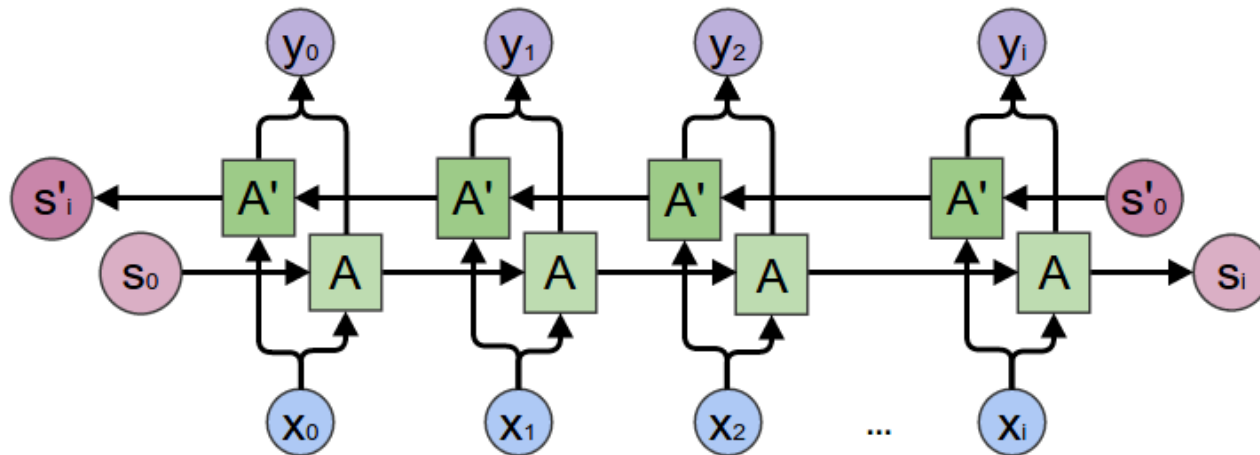


- Bidirectional RNN can improve performance
- Apply Bidirectional RNN, Top \rightarrow Bottom and Bottom \rightarrow Top
- Also, we can rotate images so that we go in 4 directions!



Sequence-to-Sequence Model


Sequence-to-Sequence Model

- Our understanding of contexts
 - Answer on Question / Translation etc
 - (Listening/Reading) → (Understanding) → (Speaking/Writing)
- Understanding of sequence-to-sequence models
 - (Encoding) → (Thought Vector) → (Decoding)

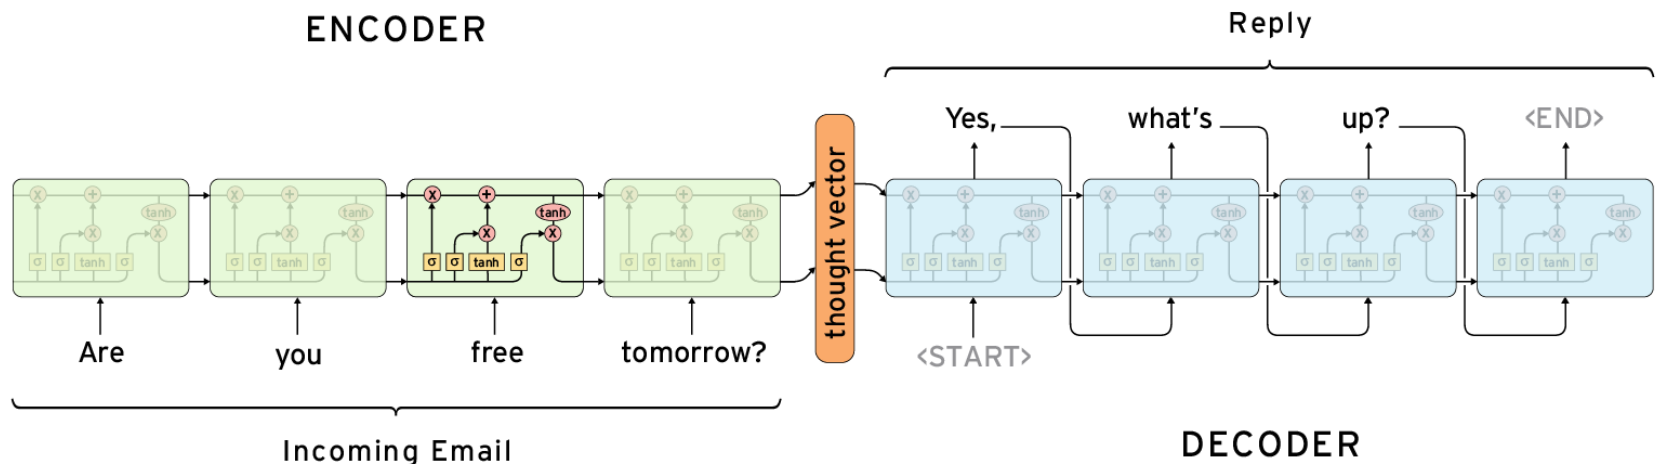

Seq2Seq Model for Time Series Prediction

- For time series prediction, we can apply seq2seq model
 - Input: x_1, x_2, \dots, x_N
 - Output: x_{N+1}

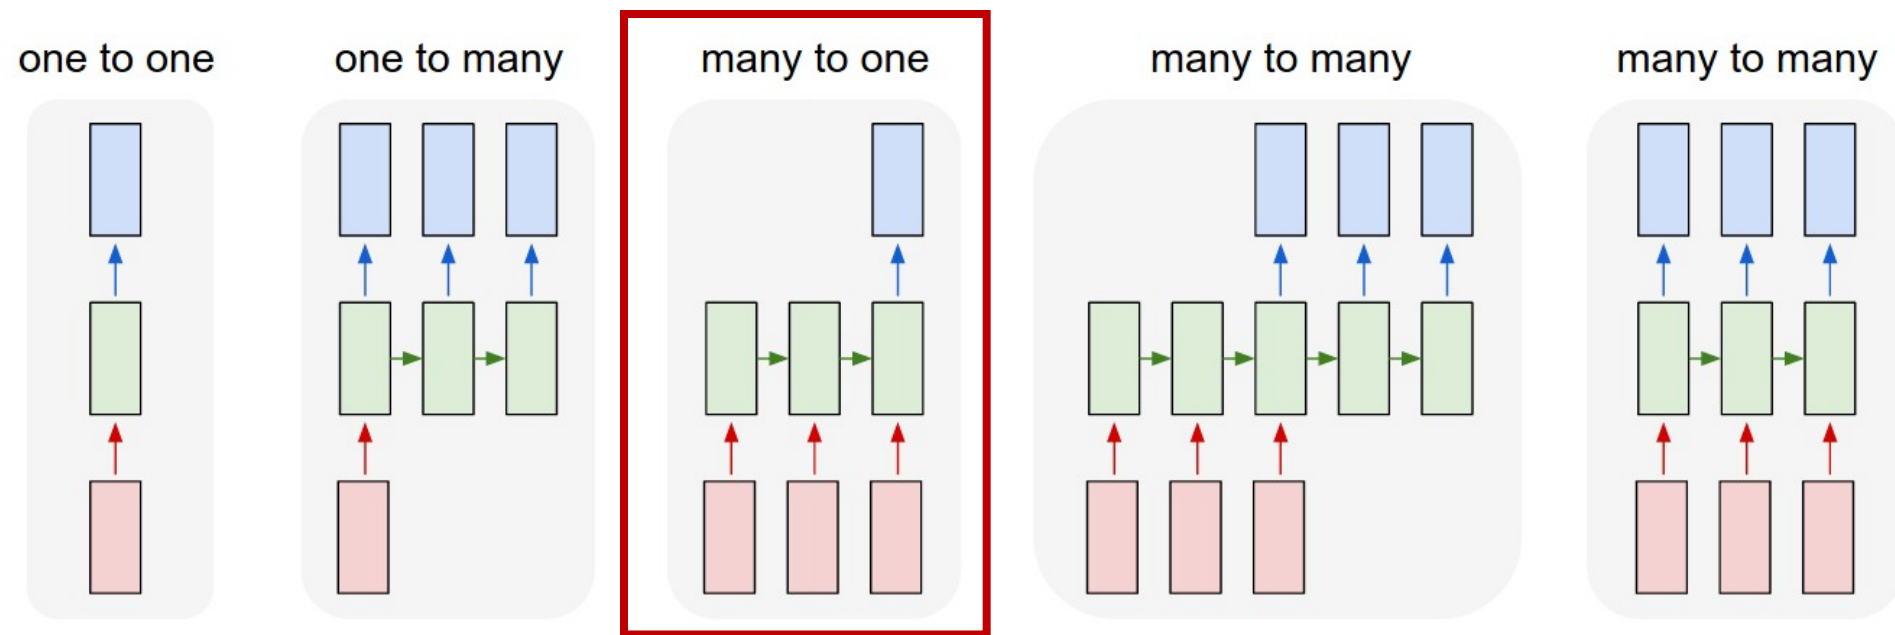

Thank you ☺

Contact Info: quantic.jh@gmail.com

References

- Jiyong Park (2018), KAIST Summer Session, Retrieved from <https://sites.google.com/view/kaist-mis-session2018/overview?authuser=0>