

Dmitry: Standard Tool Guide

Ruth Faith Wnadabwa

Deakin University

August 25 2025


Dmitry: Standard Tool Guide

DMitry (Deepmagic Information Gathering Tool) is a command-line utility used for the reconnaissance phase of a security assessment. It is designed to gather as much public information as possible about a host or domain. This tool automates the process of information gathering, which is common in the toolkits of network administrators, penetration testers, and system engineers. This guide introduces DMitry as part of the Deakin Detonator Toolkit (DDT), outlining its usage for information gathering and analysis.



Warning: This feature is for educational use only. It generates fictional scenarios based on real vulnerabilities. Do not use any exploit steps in real-world environments unless you have

proper authorization.

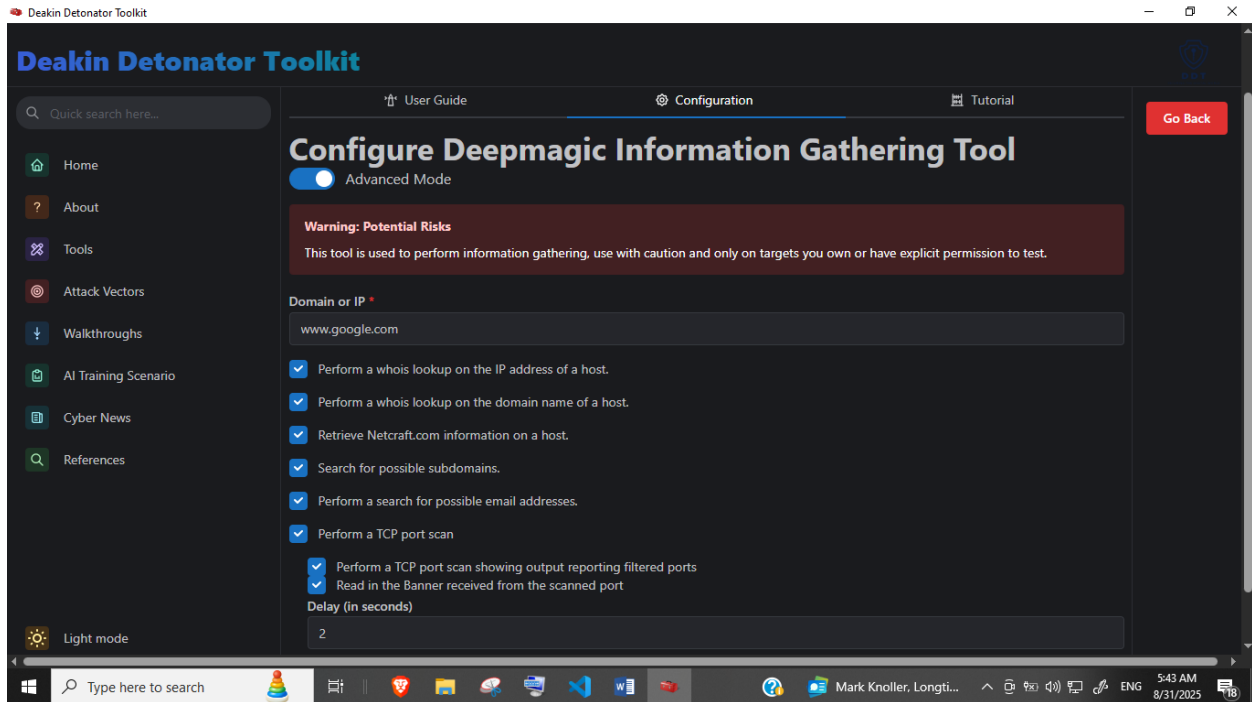

Setup and Launch

The Deakin Detonator Toolkit (DDT) provides a user interface that facilitates the execution of DMitry. To run the tool locally when developing or customizing, a user can use the following command lines from their development environment:

- `yarn run tauri dev`
- `npm run tauri dev`


This command builds and runs the GUI version of the DDT tool in a local, safe execution context provided by Tauri. The system also provides real-time notifications in the console interface. The DMitry tool within DDT will check for and install any necessary dependencies before it can be used.

Step-by-Step UI Walkthrough

The DDT user interface for DMitry includes a main configuration panel with a "Basic Mode" and an "Advanced Mode".


Basic Mode

The basic mode is designed for quick and simple information gathering. The user can simply enter the target domain or IP address and click the "Start Deepmagic Information Gathering Tool" button.

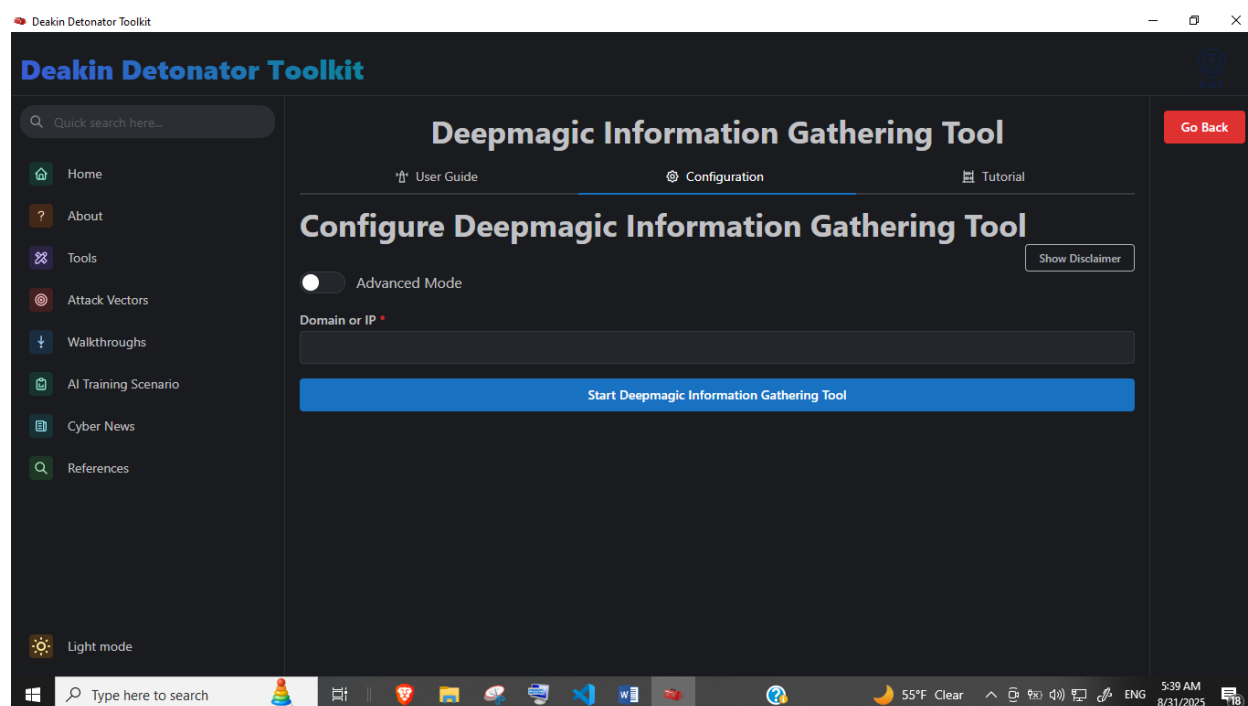


Advanced Mode

The advanced mode provides more granular control over the tool's functions. Users can select specific information to gather by enabling or disabling various options.

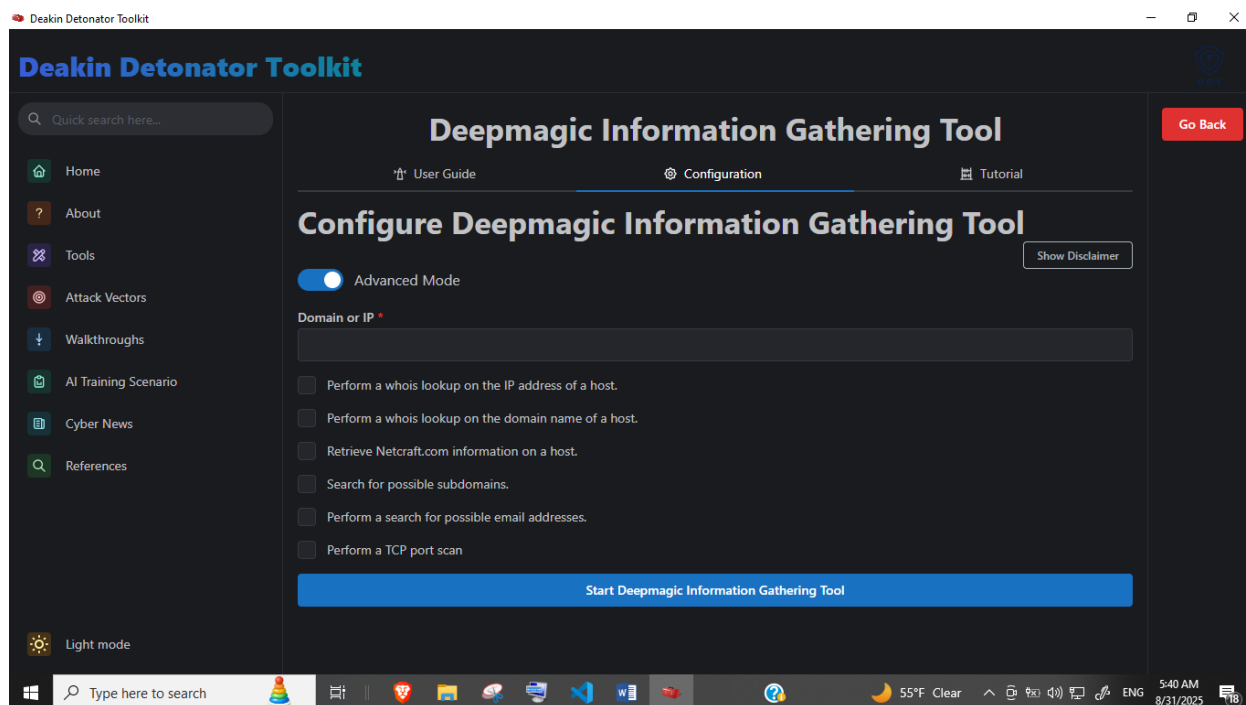


Example of filled advanced configurations

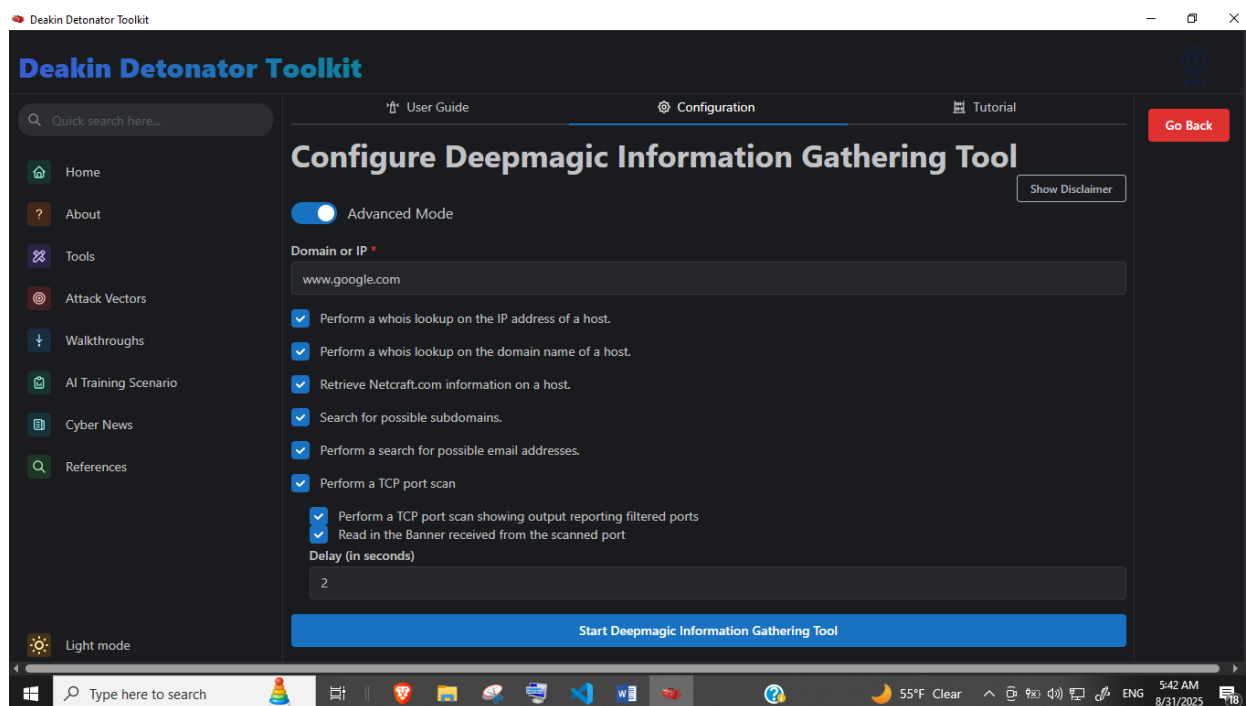

The principal fields and their functions are:

- Whois lookup (domain): Performs a whois lookup on the domain name of the target.

- Whois lookup (IP): Performs a whois lookup on the target's IP address.
- Netcraft data retrieval: Retrieves operating system, web server, and uptime information for the target.
- Subdomain search: Searches for possible subdomains of the target host.
- Email search: Searches for email addresses associated with the target domain.
- TCP Port Scan: Performs a TCP port scan on the target to find open ports.

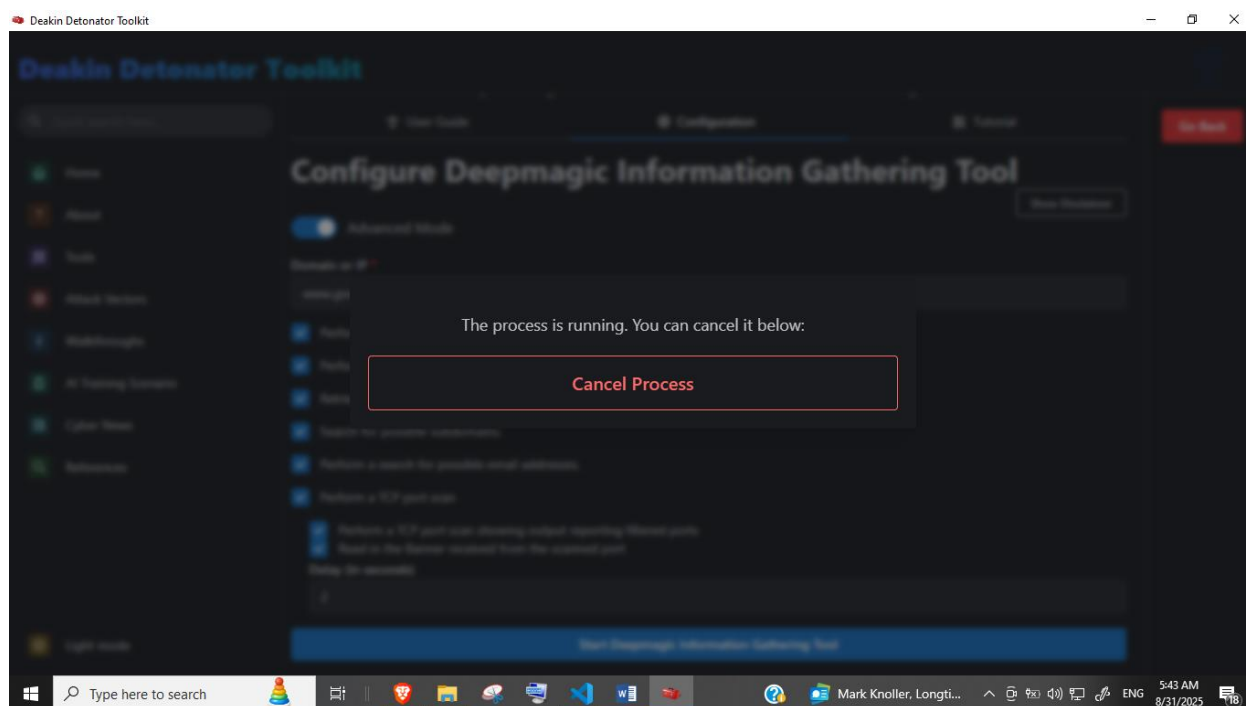


Output and Interpretation

After running DMitry, the output panel displays the results of the scan based on the selected options. The output includes a breakdown of the information gathered, such as whois details, a list of subdomains, and open ports from the TCP scan.

User Guide section

The User Guide tab provides a simple documentation page with the high-level overview of what the tool is and its basic functions. It includes a brief description and a step-by-step list of

how to perform a basic scan. It also provides a note about enabling the advanced mode for more options and a second note about the delay in TCP port scanning.

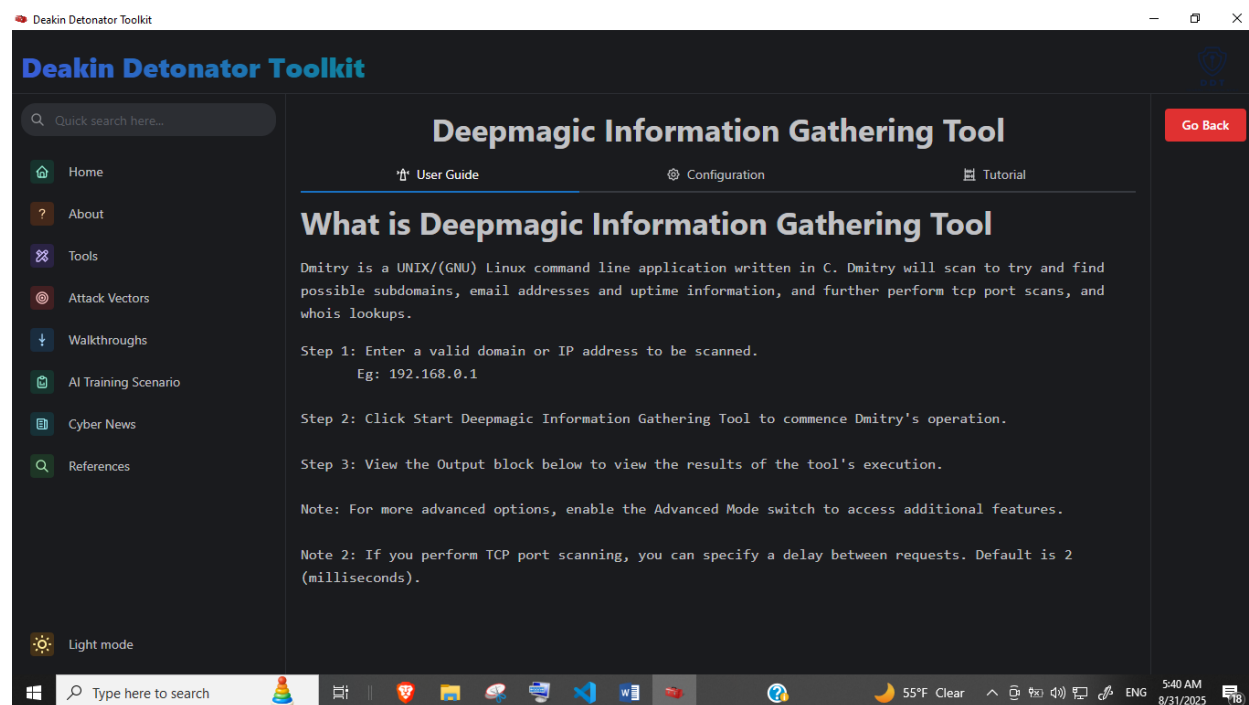

Tutorial

The tutorials tab should provide a detailed tool guide for the Dmitry application in DDT.

The content of this tool guide will provide the material for this tab.

