

FTPconnect User Guide

Ruth Faith Wandabwa

Deakin University

September 8, 2025

FTPconnect on DDT

FTPConnect is an FTP (File Transfer Protocol) server connection and interaction tool included in the Deakin Detonator Toolkit (DDT). An FTP server is a computer program or a computer that is used to transfer files between two or more systems via a network. This is made easy by FTPConnect, which gives a user interface to organize and carry out these activities in the DDT framework.


Setup and Launch

The following commands should be used in the development environment to run the DDT tool locally for development or make customizations:


```
yarn run tauri dev
```

```
npm run tauri dev
```

This command builds and runs the GUI in a local, safe context provided by Tauri, as shown in the screenshot below.

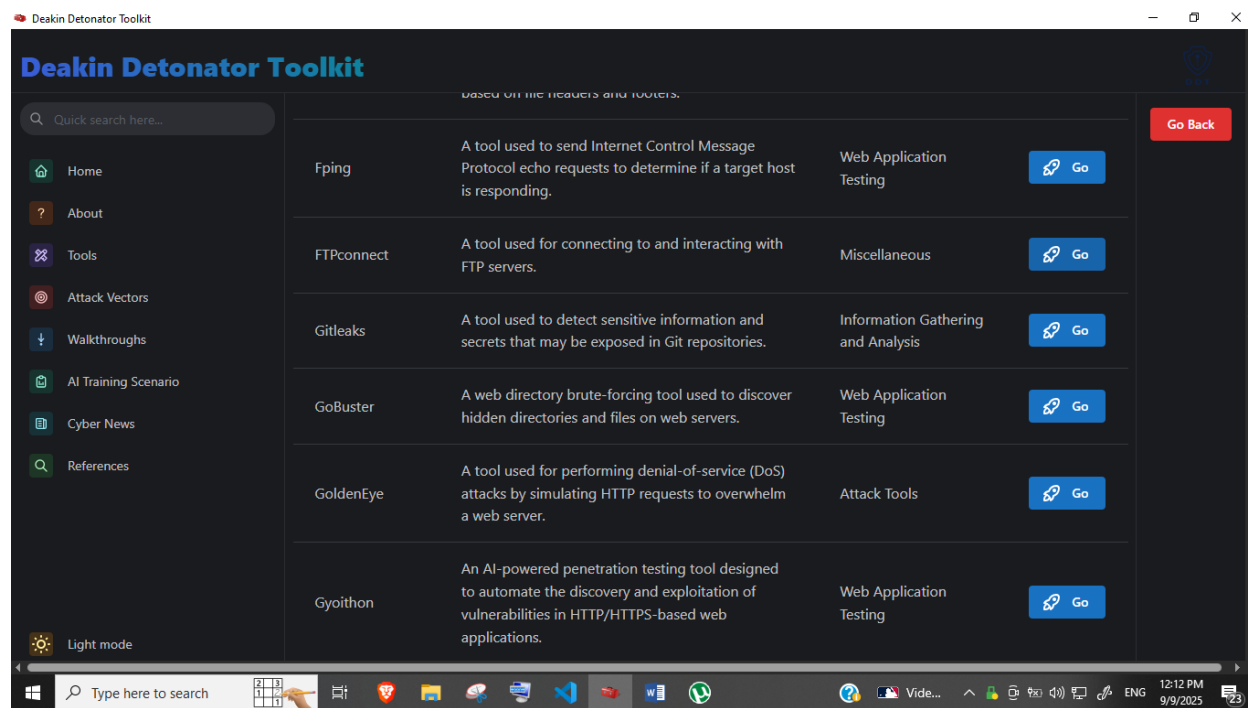


Before using it, the FTPconnect tool in DDT will check and install the dependencies.

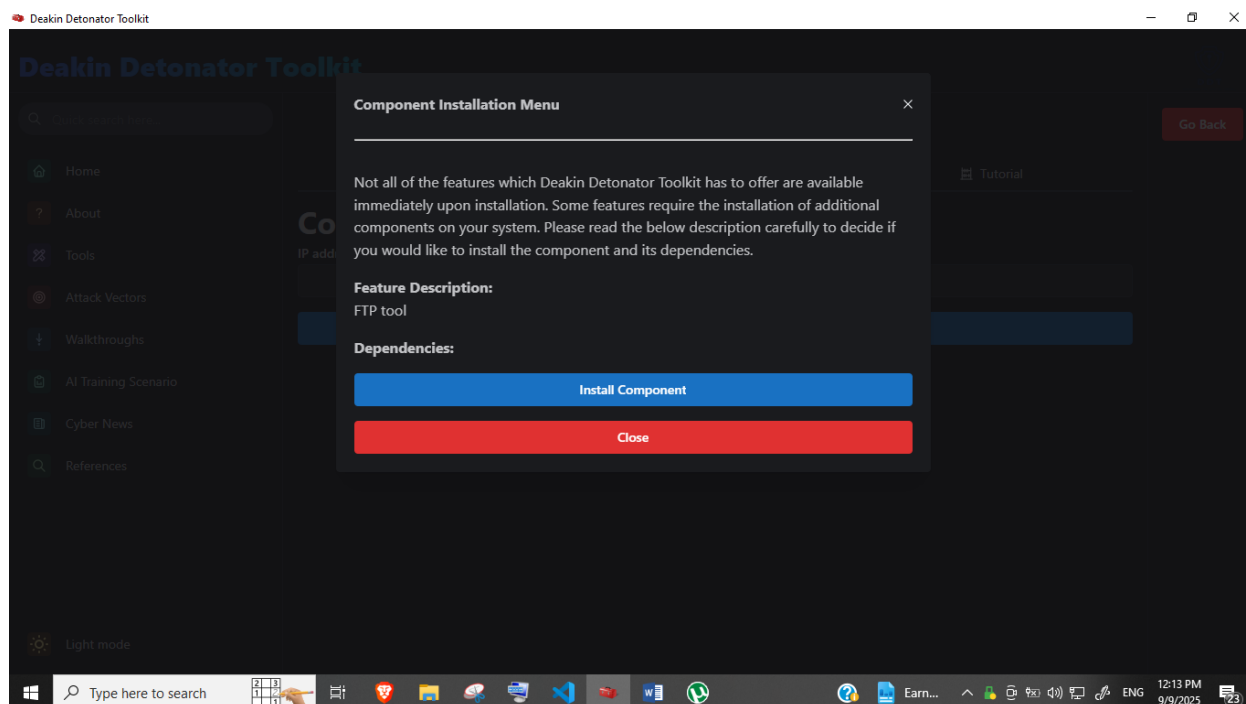

The FTPconnect user interface gives a results output panel and a configuration panel with three tabs: User Guide, Configuration, and Tutorial, as shown in the screenshot below.




The FTPconnect tutorial tab is shown below:

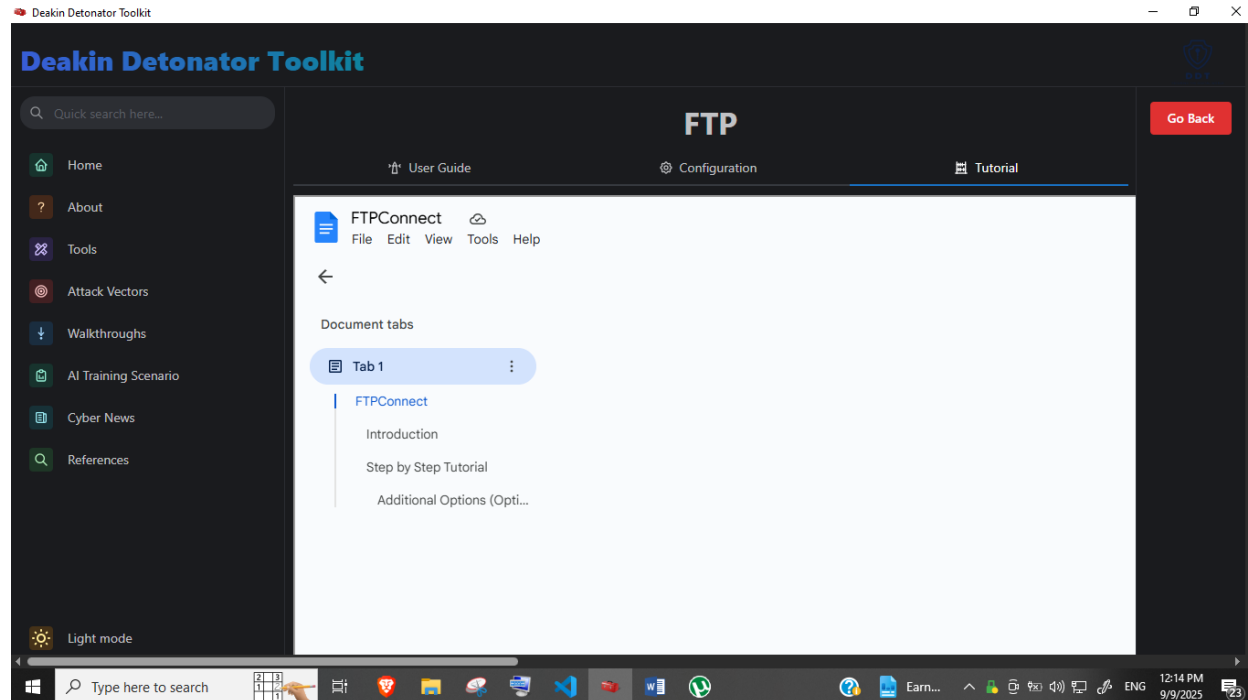

Configuration

To set up FTPconnect, you must enter the FTP IP address of the desired FTP server.

Once the IP address has been typed in, press the "Start FTP" button, and the connection will be made. It is also possible to provide an optional output name to store the output of the interaction.

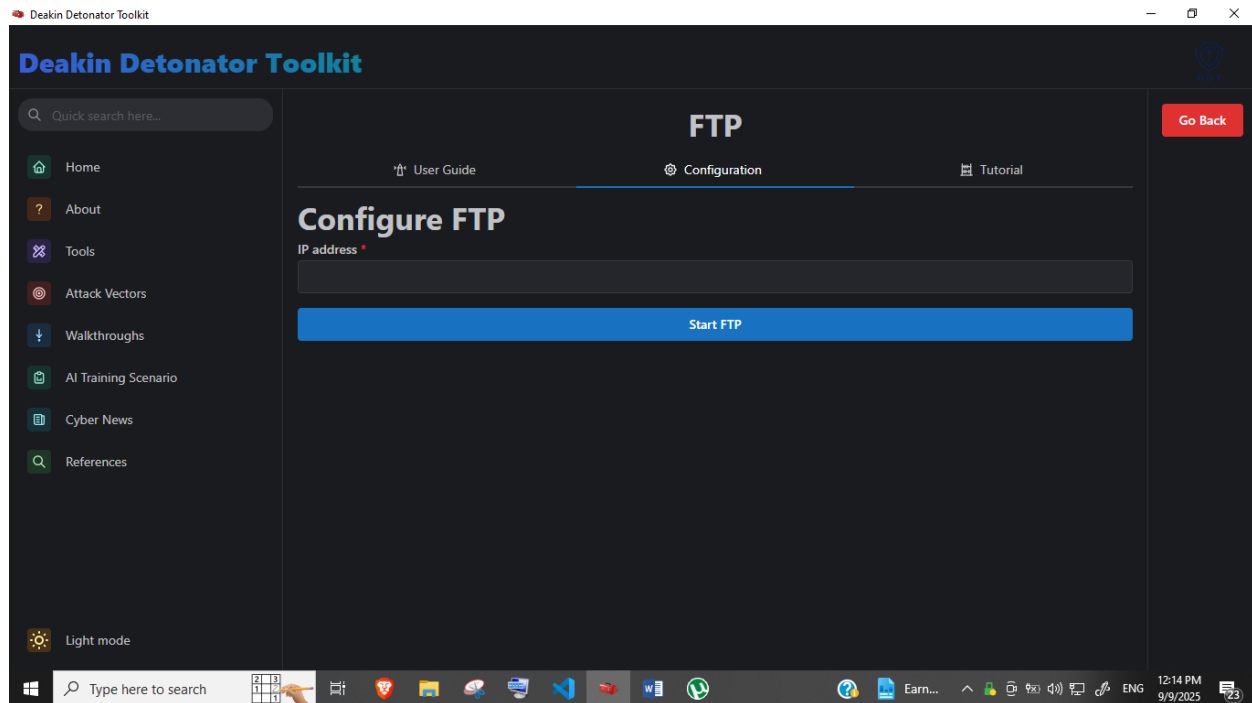

Step-by-step guide


The FTPconnect tool is designed to facilitate communication with an FTP server.

According to the given user guide, the procedure to follow after connection to the tool is as follows:


- Enter the FTP server's IP address.
- If a login prompt appears, enter the login details. If not, enter "user" and then your login details.

Output and Interpretation

DDT displays the output from FTPconnect in the output panel right below the configuration panel.

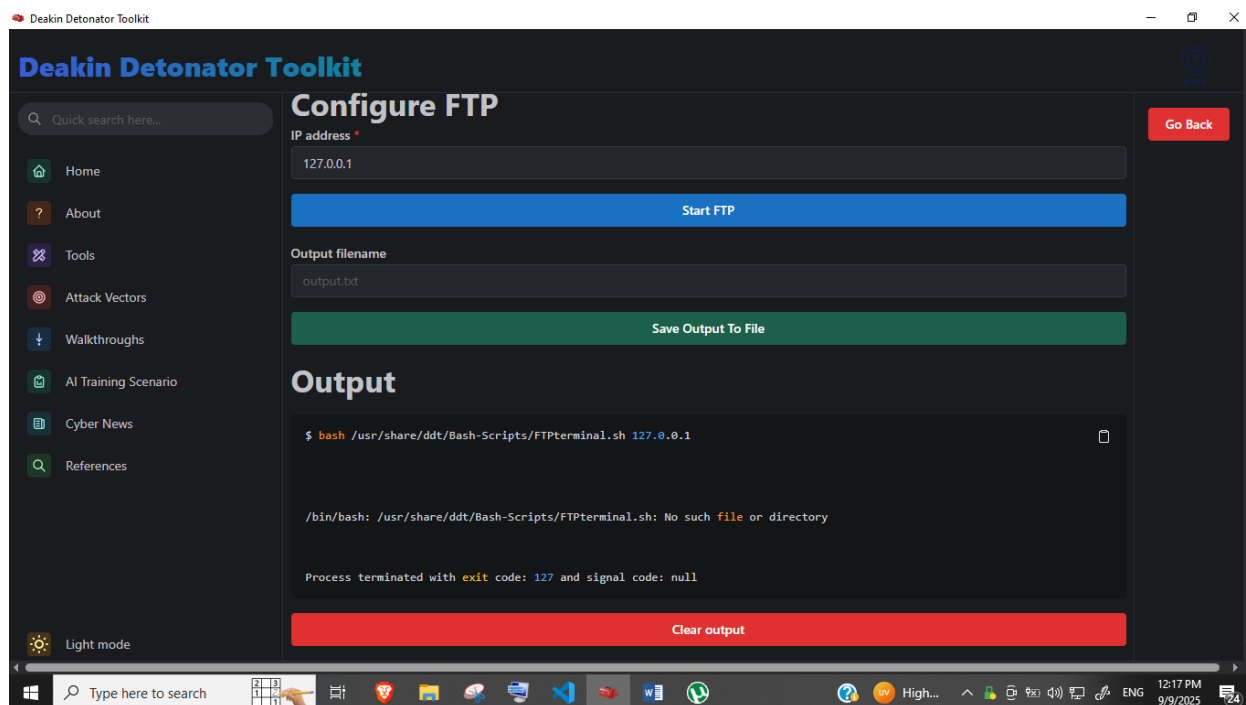

The user can save the output to a file on their local machine by entering a filename in the "Output filename" field and clicking the "Save Output to File" button.

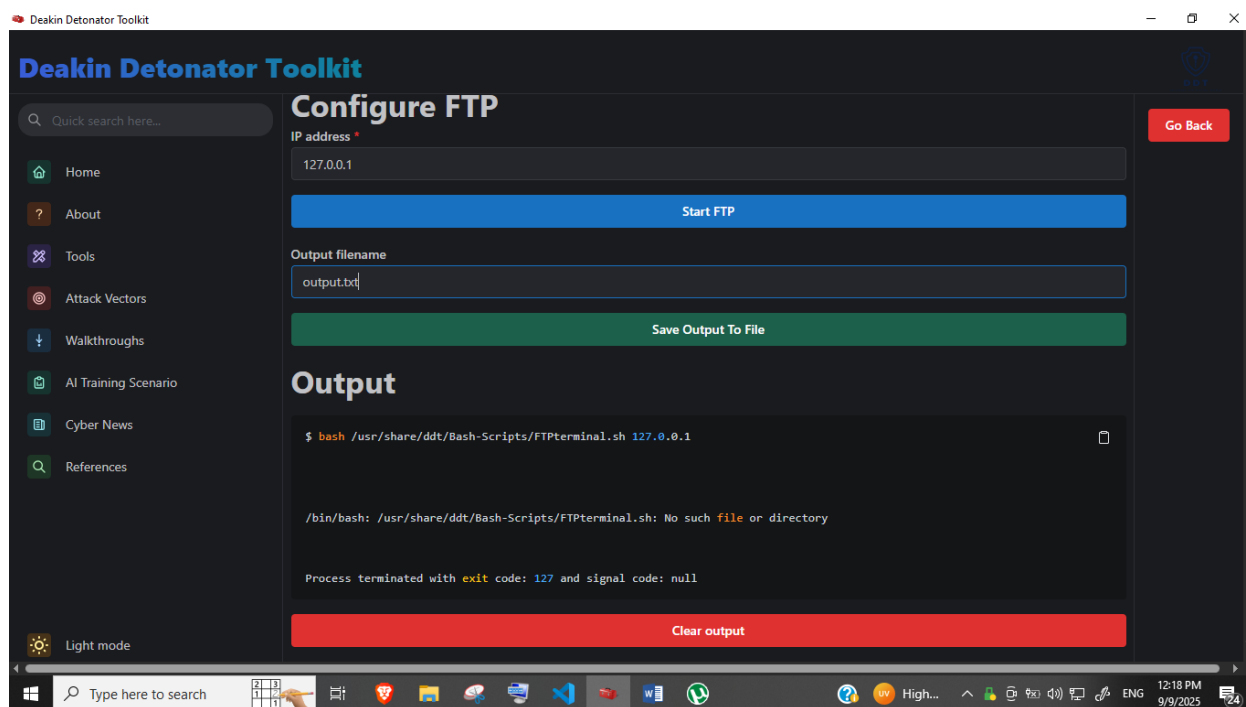

The tool will confirm that the output has been saved and provide the file path.

Deakin Detonator Toolkit

Quick search here...

User Guide Configuration Tutorial

Configure FTP

IP address *

127.0.0.1

Start FTP

Output has been saved!
Output save file: /Deakin-Detonator-Toolkit/OutputFiles/output.txt

Output

```
$ bash /usr/share/ddt/Bash-Scripts/FTPterminal.sh 127.0.0.1

/bin/bash: /usr/share/ddt/Bash-Scripts/FTPterminal.sh: No such file or directory

Process terminated with exit code: 127 and signal code: null
```

Clear output

Light mode

Type here to search

12:18 PM 9/9/2025