


Fping

Introduction


Fping uses ICMP echo requests to check whether one or more target hosts are responding. DDT provides a graphical interface for configuring and running the tool.

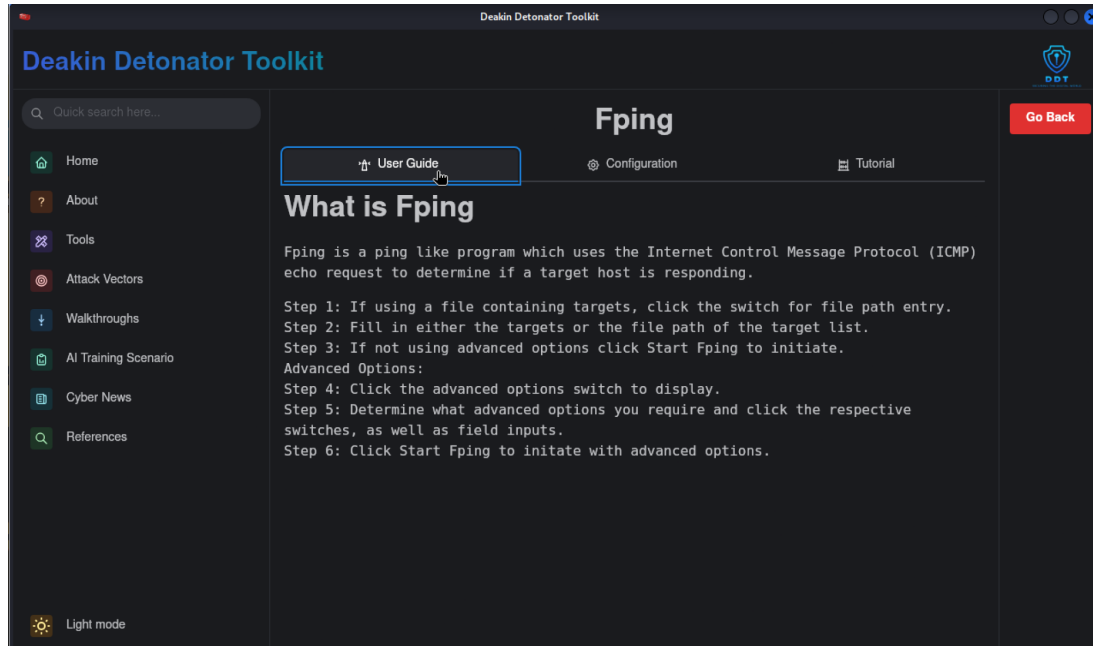


Configuration and Deployment

Open Fping from Tools and select Configuration. Enter a hostname or IP address in the Target field, then click Start Fping.

www.google.com

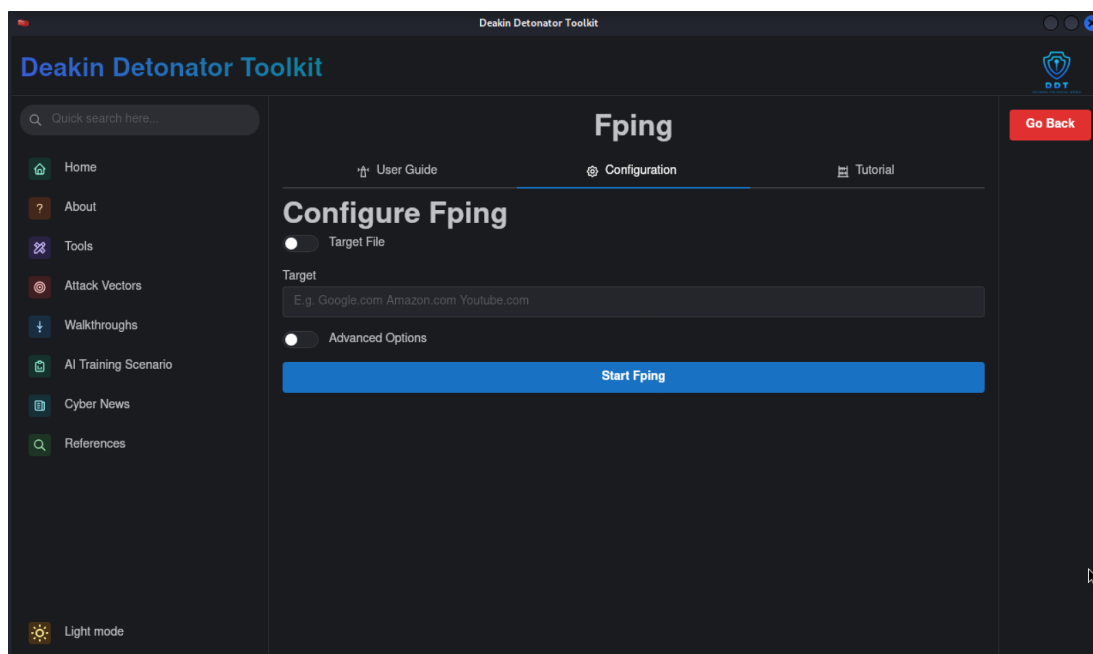


A responding target is shown as alive in the output.

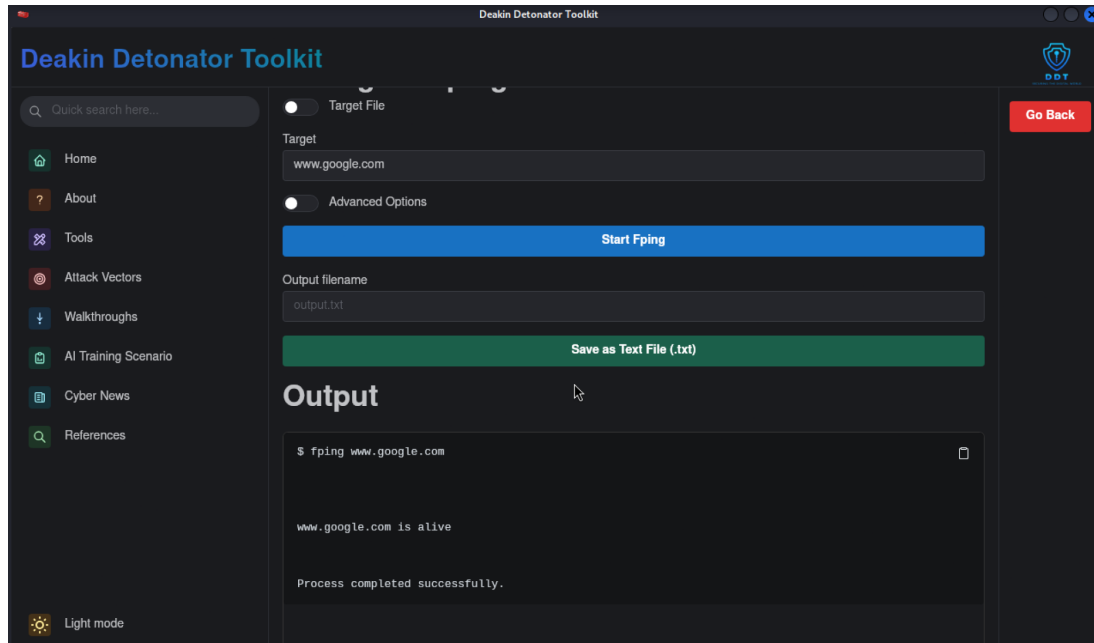

Using a Target File


To test multiple targets, enable Target File and enter the path to a text file containing the targets.

/home/kali/Desktop/targets.txt

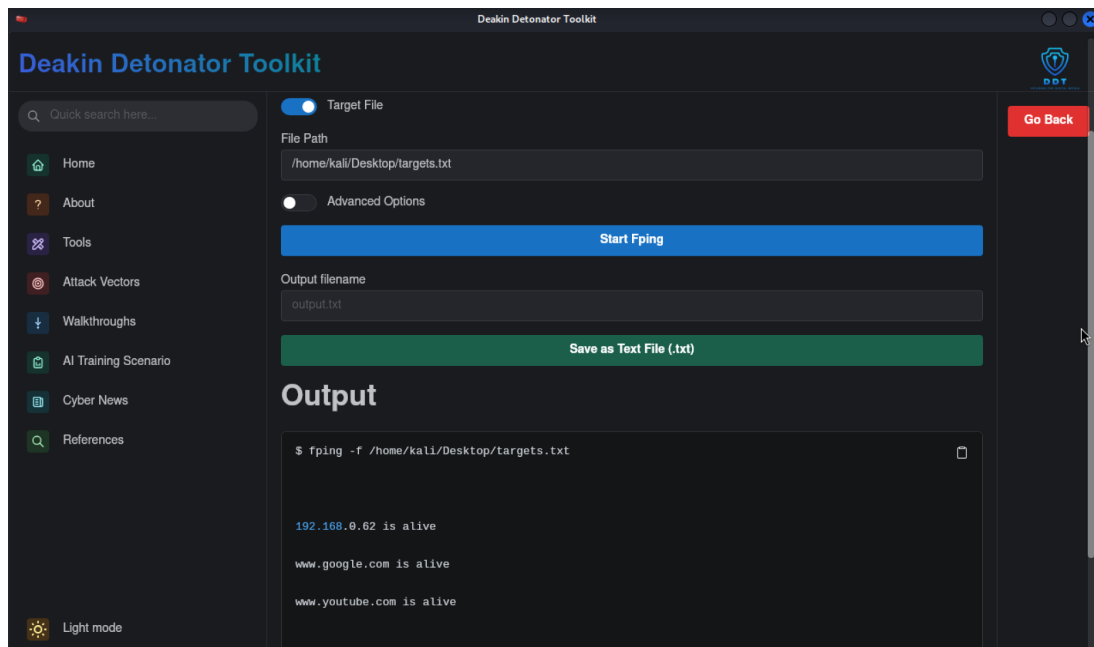

Advanced Options


Enable Advanced Options for settings such as IPv4/IPv6 only, alive or unreachable targets, address/name output, packet size, TTL, retries, packet interval and final statistics.

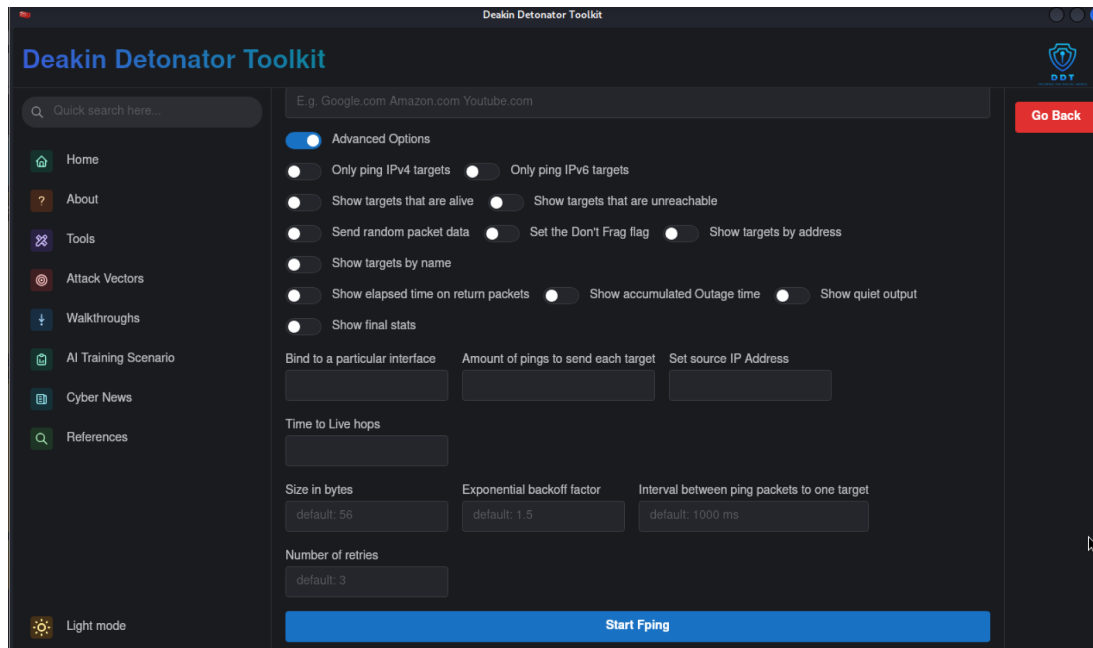

Advanced Output

For example, Show targets by address displays responding hosts by IP address. With the target file enabled, DDT runs:

```
fping -A -f /home/kali/Desktop/targets.txt
```

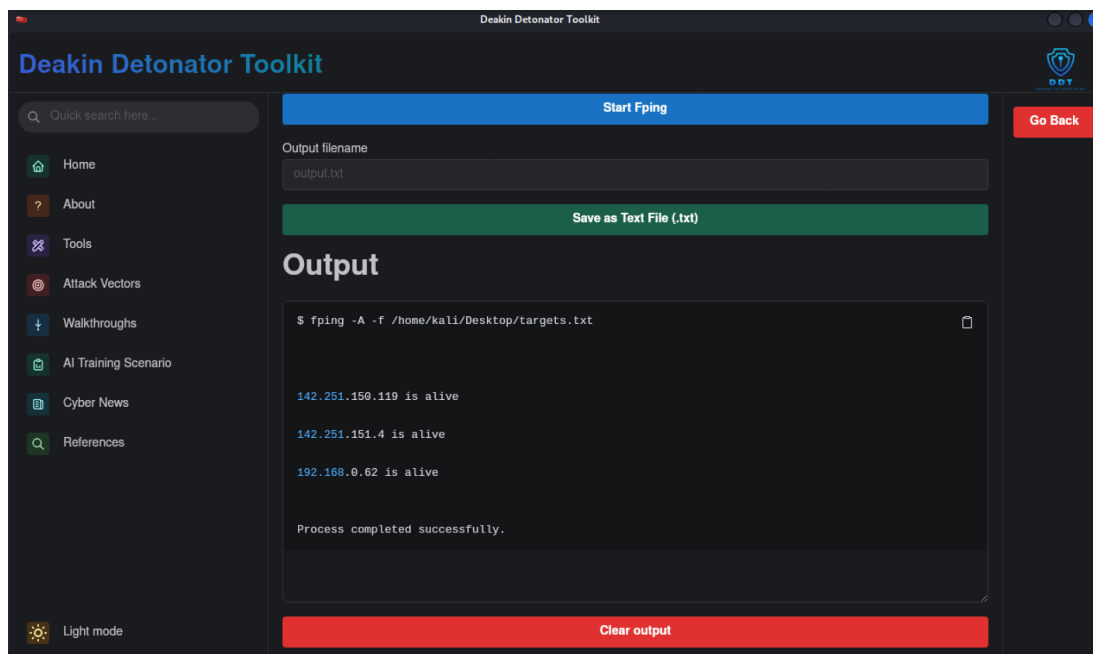

Saving and Clearing Output

Enter an output filename and select Save as Text File (.txt) to save results. Use Clear output before starting another test.

Troubleshooting

If a target does not respond, check the hostname/IP, target-file path and network connection. Some systems block ICMP, so no reply does not always mean the host is offline.