	Channel	Region	Fresh	Milk	Grocery	Frozen	Detergents_Paper	Delicassen	
0	2	3	12669	9656	7561	214	2674	1338	th
1	2	3	7057	9810	9568	1762	3293	1776	
2	2	3	6353	8808	7684	2405	3516	7844	
3	1	3	13265	1196	4221	6404	507	1788	
4	2	3	22615	5410	7198	3915	1777	5185	


```
x = dataset.iloc[:, [3, 4]].values
```

```
from sklearn.cluster import KMeans
wcss_list= [] #Initializing the list for the values of WCSS

for i in range(1, 11):
    kmeans = KMeans(n_clusters=i, init='k-means++', random_state= 42)
    kmeans.fit(x)
    wcss_list.append(kmeans.inertia_)

mtp.plot(range(1, 11), wcss_list)
mtp.title('The Elobw Method Graph')
mtp.xlabel('Number of Clusters, K')
mtp.ylabel('wcss_list')
mtp.show()
```

/usr/local/lib/python3.10/dist-packages/sklearn/cluster/_kmeans.py:870: FutureWarning: The default value of `n_init` will change warnings.warn(/usr/local/lib/python3.10/dist-packages/sklearn/cluster/ kmeans.py:870: FutureWarning: The default value of `n init` will change /usr/local/lib/python3.10/dist-packages/sklearn/cluster/_kmeans.py:870: FutureWarning: The default value of `n_init` will change warnings.warn(/usr/local/lib/python3.10/dist-packages/sklearn/cluster/ kmeans.py:870: FutureWarning: The default value of `n init` will change warnings.warn(/usr/local/lib/python3.10/dist-packages/sklearn/cluster/_kmeans.py:870: FutureWarning: The default value of `n_init` will change warnings.warn(/usr/local/lib/python3.10/dist-packages/sklearn/cluster/ kmeans.py:870: FutureWarning: The default value of `n init` will change warnings.warn(/usr/local/lib/python3.10/dist-packages/sklearn/cluster/_kmeans.py:870: FutureWarning: The default value of `n_init` will change warnings.warn(/usr/local/lib/python3.10/dist-packages/sklearn/cluster/_kmeans.py:870: FutureWarning: The default value of `n_init` will change warnings.warn(/usr/local/lib/python3.10/dist-packages/sklearn/cluster/ kmeans.py:870: FutureWarning: The default value of `n init` will change warnings.warn(/usr/local/lib/python3.10/dist-packages/sklearn/cluster/_kmeans.py:870: FutureWarning: The default value of `n_init` will change

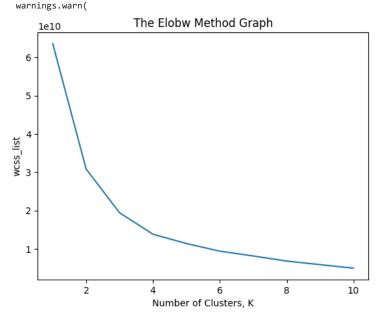

kmeans = KMeans(n_clusters=5, init='k-means++', random_state= 42)
y_predict= kmeans.fit_predict(x)

```
mtp.scatter(x[y_predict == 0, 0], x[y_predict == 0, 1], s = 10, c = 'blue', label = 'Cluster 1') #for first cluster
mtp.scatter(x[y_predict == 1, 0], x[y_predict == 1, 1], s = 10, c = 'green', label = 'Cluster 2') #for second cluster
mtp.scatter(x[y_predict == 2, 0], x[y_predict == 2, 1], s = 10, c = 'red', label = 'Cluster 3') #for third cluster
mtp.scatter(x[y_predict == 3, 0], x[y_predict == 3, 1], s = 10, c = 'cyan', label = 'Cluster 4') #for fourth cluster
mtp.scatter(x[y_predict == 4, 0], x[y_predict == 4, 1], s = 10, c = 'magenta', label = 'Cluster 5') #for fifth cluster
mtp.scatter(kmeans.cluster_centers_[:, 0], kmeans.cluster_centers_[:, 1], s = 300, c = 'yellow', label = 'Centroid')
mtp.title('Clusters of Wholesale Customers')
mtp.xlabel('Milk')
mtp.ylabel('Grocery')
mtp.legend()
mtp.show()
```

