


Authentication

Kameswari Chebrolu
Department of CSE, IIT
Bombay

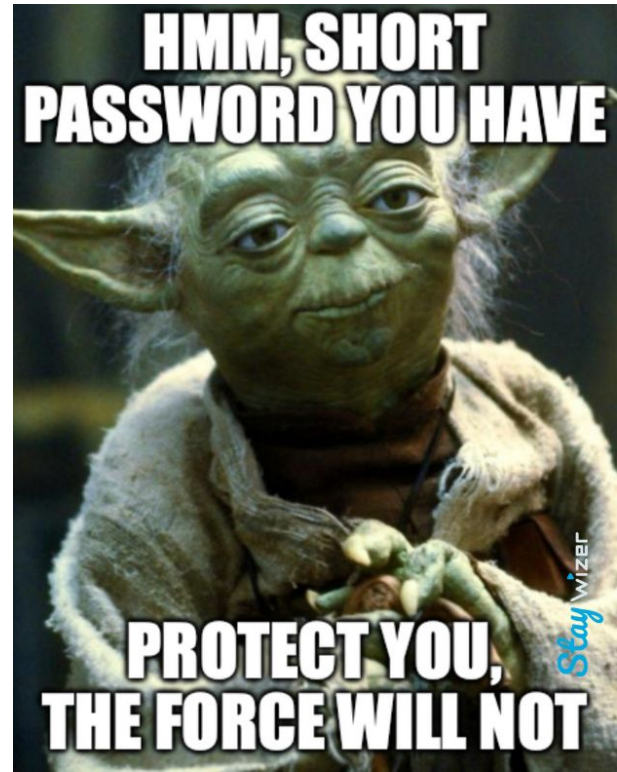

<https://www.wizer-training.com/hubfs/Yoda%20Meme.png>

Outline

- Authentication Background
- Causes of Vulnerabilities and their Impact
- Common Vulnerabilities and safeguards
 - Vulnerabilities in password-based login
 - Vulnerabilities in multi-factor authentication
 - Vulnerabilities in other authentication mechanisms
- Overall Best Practices

Background

- Clients make requests and web server responds
 - GET request method is read-only but POST, DELETE, PUT can make changes in server
 - Need to ensure actions are restricted to those with right permissions
 - E.g. A student user should not be able to delete or even view assignments posted by other students
 - A e-commerce customer cannot access someone else's cart or use their pay balance for own purchase
 - All of above is handled by **Access Control**

Access Control System

- Terminology
 - Subject: entity that requires access to a resource (e.g. users, batch-job, daemons)
 - Object: resource to which access is controlled (e.g. file, command, terminal)

- Access Control System manages
 - **Subject authentication (our focus now)**
 - **Subject is really who they claim to be**
 - Session management (covered under background)
 - Identify which subsequent requests were made by the same subject
 - Session hijacking attacks covered under client based XSS and CSRF attacks
 - Authorization (upcoming)
 - Check if the subject has permissions to access the object
 - Revoke access when required
 - Audit (not covered)
 - Record the access for future review

Authentication vs Authorization

Authentication: verify user is really who they claim to be

Authorization: verify whether a user (after authentication) is allowed to perform a given action

Authentication

- Is HTTP request being issued by a specifically-identified user?
- Based on the following factors
 - Something user knows (e.g. password)
 - Something user has (e.g. mobile phone)
 - Something user is (e.g. fingerprint)

- Typically implemented as a shared secret between user and web server in the form of a password (a single factor)

- Details of Implementation
 - Login forms implemented in HTML via forms
 - Supplied username and password sent to server as a POST request (often over HTTPs)
 - Server calculates hash of password and checks with value stored in database
 - If valid, server gives user a session token
 - Browser/Javascript sends token to server on every future request
 - Server will use the token
 - To authenticate each request
 - To tie this requests with past requests to maintain state

- 2FA (two factor authentication) is gaining popularity these days in many settings (e.g. financial transactions)
 - One has to enter password (first factor) and also a OTP (second factor)
 - OTP sent to or generated in mobile phone

Outline

- ~~Background~~
- Causes of Vulnerabilities and their Impact
- Common Vulnerabilities and safeguards
 - Vulnerabilities in password-based login
 - Vulnerabilities in multi-factor authentication
 - Vulnerabilities in other authentication mechanisms
 - Vulnerabilities in OAuth authentication
- Overall Best Practices

Causes of Vulnerabilities

- Weak authentication mechanisms that do not protect against brute-force attacks
- Logic flaws in implementation that allows authentication to be bypassed

Impact

- Can be very severe, especially compromise of high-privileged accounts (e.g. web administrator)
 - Not just full control of app, but can also access internal infrastructure
- Compromise of low-privileged account can also increase attack surface

Points to Note

- Web Application Accounts vs System Accounts
(www-data/deploy_user)

Aspect	Web application accounts (e.g. Django admin, user accounts)	System Accounts (www-data/deploy_user)
Purpose	Admin: Manage the application content and settings; Users: manage own content	Runs the web server/application processes
Scope	Application-level	OS-level
Authentication	Username/password (stored in the app's DB)	No direct login (managed by OS; e.g. /etc/shadow)
Control	Privileges within the web app	Controls file access and script execution
Storage of Credentials	Application database	Linux account settings
Threats	Data leaks, malicious uploads	Privilege escalation, malicious file execution

Outline

- ~~Background~~
- ~~Causes of Vulnerabilities and their Impact~~
- Common Vulnerabilities and safeguards
 - Vulnerabilities in password-based login
 - Vulnerabilities in multi-factor authentication
 - Vulnerabilities in other authentication mechanisms
- Overall Best Practices

Brute Force Attacks

- Attacker uses trial and error to guess user credentials
 - Need to guess both **username** and **password**
 - Often automated using educated guesses/popular wordlists (dictionary attacks)

Username

- Often easy to guess
 - E.g. [firstname.lastname@example.com](#) or admin or administrator or root
- Username enumeration: attacker sends username and observes changes in server's behavior (via response)
 - Can leverage login page or registration forms

- Server response:
 - Status codes: Difference in HTTP status code (200, 401, 404 etc)
 - Defense: Return same status code regardless of guess
 - Error messages: Returned error message are different
 - “Both username AND password” incorrect or
 - “Only password” incorrect
 - Defense: Use generic “identical” messages in both cases
 - “Incorrect username or password entered”
 - Note sometimes developers may make mistakes in error messages, one character difference can reveal info!
 - “Incorrect username or password entered”
 - “Incorrect Username or Password entered”

- Response times: Difference in response time between wrong and correct guess
 - E.g. Calculate hash of password for checking only if username is valid
 - Can increase response time if guess of username is correct
 - Attacker can enter a very long password to increase this delay further
 - Defense: calculate hash of password even for invalid usernames

Passwords

- Two types
 - Online attacks
 - Offline attacks

Online Password Attacks

- Try a large number of username/password combinations against the login page
 - Often limited by the speed of the network (3 – 5 login attempts per second)
 - Password brute forcing is a function of strength of the password!
 - Will involve many failed guesses before success
 - Need to be more sophisticated than simply iterating through all possible combinations

Safeguards

- Enforce use of high-entropy passwords; Change passwords regularly
 - A minimum number of characters
 - A mixture of lower and uppercase letters
 - At least one special character
 - In spite of above, users use (weak) password they can remember and try to fit into the password policy

- Make it difficult to automate the process and slow down the rate at which an attacker can attempt logins
 - Lock the account after too many failed login attempts
 - Block the IP address after too many login attempts (same account) or in quick succession across accounts (rate limiting)

Circumventing Account Lock

- Locking an account offers some protection against brute-forcing a specific account
- Does not protect against accessing any random account
- Make a list of (likely valid) candidate usernames
 - Obtained via username enumeration or some common/popular list

- Decide on a very small list of passwords that have high probability of hit (across usernames)
 - Ensure number of passwords is under the max login attempts permitted before locking
 - Limit of 3 attempts → max 3 password guesses
- Password spraying: Try the list of selected passwords (through some automated process) against username in the candidate list
 - Success with one single username → account compromised

- Doesn't help against credential stuffing attack as well!
 - Credential stuffing: Use previously stolen usernames and passwords against new websites
 - Use a big dictionary of username, password pairs
 - Stolen in data breaches
 - Many people reuse the same username and password across websites
 - Each username is only attempted once → limit never reached
 - One attack can compromise many different accounts!

Circumventing IP Block

- Circumvention depends on how implemented?
- Suppose the counter to IP block is reset if login successful. How to leverage this?
 - Add valid login:passwd (of attacker's) after every 2 guesses of attempted login → limit is never reached
 - Suppose attacker is trying to crack user1's password
 - user1 passwd1; user1 passwd2; attacker passwd; user1 passwd3 etc

- Another implementation:
 - Too many login requests in a short window → block IP address
 - Unblock after some time or manually by an admin or by user after some successful captcha
 - How are requests measured? Rate of HTTP requests sent per IP address
- Can bypass if you can guess multiple passwords with a single request
 - E.g. if implementation supports json objects


```
{  
  "username": "Chotu",  
  "password": ["123456",  
"password!", "IruleWorld", ...]  
}
```

Offline Password Attacks

- Offline password attacks: Recover one or more passwords from a password storage file or database
 - Windows: SAM; Linux: /etc/shadow
 - Database: dump in the form of [username, H(password)] or [username, salt, H(password|salt)]
 - How obtained?
 - Via attacks such as SQL injection, SSRF, Directory traversal, Information disclosure etc

- More advantageous than online attack
 - Invisible to security team and altering mechanisms (lockouts don't happen)
 - Limited by speed of computer (not network)
 - Can attempt a few million/billion password guesses per second

- Servers save [username, H(password)]
 - Why hash and not plain text? Database breaches can reveal all passwords!
 - Not very strong against offline password cracking attacks
 - E.g. SHA256, 1 billion guesses per sec, cracking half of 100 million accounts via dictionary attacks can take minutes to hours
- Often salted, server stores [username, salt, H(password|salt)]
 - Makes it more difficult (days/months) to crack passwords offline

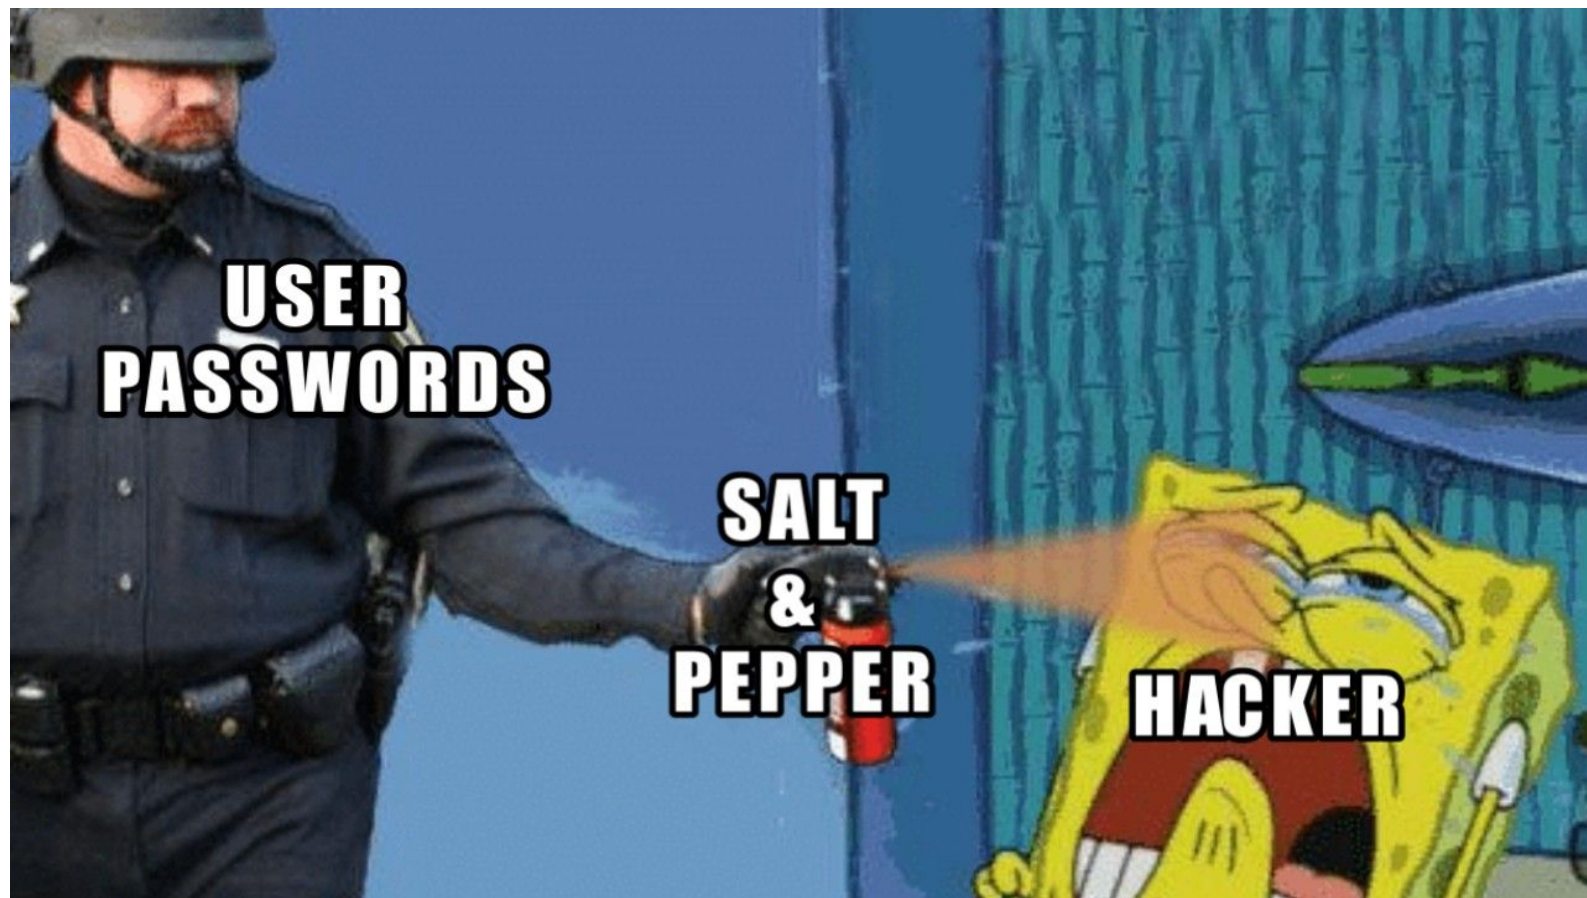

Explanation

- Cracking Passwords: Need to generate candidate passwords
 - Candidates can come from various sources
 - commonly used passwords (from data breaches)
 - dictionary words
 - permutations of known passwords
 - randomly generated strings etc
 - For each candidate,
 - Hash them using same algorithm/process used by target
 - Compare it with hash obtained from the target
 - If match found, candidate password is likely correct!

- Time to crack a password depends on many factors
 - Complexity of the password
 - Hashing algorithm used
 - Precomputed hash tables (rainbow tables) are often used to speed up computation
 - Any extra security implemented via salting or key stretching
 - Key stretching (e.g. bcrypt) does hashing multiple times making it more time-consuming and resource-intensive to crack passwords
 - Hardware resources available to the attacker

- Mitigation:
 - Strong Password Policies:
Encourage users to choose strong, complex passwords
 - These will not show up in candidate lists!
 - Use Salting/Key Stretching:
slows down has calculation and make it more difficult for attackers to crack!



ifunny.co

https://img.ifunny.co/images/84497e02e13a6a6365e14442034cf743ec45cadb66d946fa89b454c637a09844_1.jpg

Outline

- ~~Background~~
- ~~Causes of Vulnerabilities and their Impact~~
- Common Vulnerabilities and safeguards
 - ~~Vulnerabilities in password-based login~~
 - Vulnerabilities in multi-factor authentication
 - Vulnerabilities in other authentication mechanisms
- Overall Best Practices

Multi factor Authentication

- Multi factor authentication provides better security
- Two Factor Authentication (2FA) is most common
 - Involves a traditional password and a temporary verification code
- Note: verifying same factor in two different ways does not provide much security
 - E.g “What user knows” being verified twice
 - Password and OTP sent to email which is accessed via login credentials

- Verification codes are handled via “what user has” i.e. some physical device
 - In high security settings, a dedicated device is often provided
 - Device stores secret key and connects to the computer and helps you access websites online
 - Dedicated mobile app that generates a verification code
 - E.g. Google Authenticator
 - Send verification codes to user's mobile phone via SMS
 - Not as secure since code can be intercepted
 - SIM swapping attack: Attacker can obtain a SIM card with victim's phone number

<https://programmerhumor.io/programming-memes/2-factor-authentication-be-like/>



Bypassing 2FA

(Via Implementation Flaws)

- Implementation flaw-1: Improper verification of verification code
 - User shown first page for entering username and password
 - Internally, state of user changed to logged in
 - User shown second page for entering verification code
 - But, server does not check verification completion and can load other internal pages
 - Attacker: Don't enter verification code, just navigate to other pages
 - These other pages normally accessible only after valid login

- Implementation flaw-2: Mallory is the attacker who has a valid account, but is trying to login as Alice
 - (1 Response) User shown first page for entering username password

(2 Request)
POST /login/step1 HTTP/1.1
Host: vulnerable-website.com
...
username=mallory&password=qwerty

(3 Response)
HTTP/1.1 302
Location: /login/step2
set-cookie: verify=mallory;
HttpOnly
set-cookie:
session-id=xyz;HttpOnly;

- (4 Request) GET request causes the server to generate a verification code and also send second page to client
- (5 Response) User shown second page for entering verification code
- (6 Request) User enters code and a post request sent
 - In Post Mallory will submit the verification code she received

```
(4 Request)
GET /login/step2 HTTP/1.1
Cookie: session-id=xyz;
verify=mallory
```

```
(6 Request)
POST /login/step2 HTTP/1.1
Host: vulnerable-website.com
Cookie: session-id=xyz;
verify=mallory
...
verification-code=1234
```

- But server doesn't verify “same” user is completing the second step, so attacker can do following
 - Change (4 Request) to below
 - Note first step is same as before i.e. log in was done by Mallory
 - Server will generate a verification code for Alice
 - Whose phone will the server send this verification code to?
 - Response html page to enter verification code, who does the server send this to?

```
GET /login/step2 HTTP/1.1  
Cookie: session-id=xyz;  
verify=alice
```

- Brute-force the verification code
 - Why? Server will generate a verification code for Alice and sends it to her
 - Mallory has to guess this code, so try all combinations via POST
 - Note password of Alice was not even needed!

```
POST /login/step2 HTTP/1.1
Host:
vulnerable-website.com
Cookie: session-id=xyz;
verify=alice
...
verification-code=0000
```

- Safeguard: logout user after a certain number of incorrect verification codes
- Circumvention: Can automate the process via macros (part of ZAP, burp-suite tools)
 - You will get logged out, but you will automatically log back in and try again and again
 - Easier if the verification code does not change across logouts
 - Server pinned OTP, attacker trying various combos
 - But can try same verification code each time and check
 - will take many attempts
 - Attacker pinned OTP, server generating different code each time

Outline

- ~~Background~~
- ~~Causes of Vulnerabilities and their Impact~~
- Common Vulnerabilities and safeguards
 - ~~Vulnerabilities in password-based login~~
 - ~~Vulnerabilities in multi-factor authentication~~
 - Vulnerabilities in other authentication mechanisms
- Overall Best Practices

Other Authentication Mechanisms

- Most websites provide additional functionality to manage accounts
 - Remember me/keep me logged in
 - Change/reset password
- Websites normally look at vulnerabilities in the login page and overlook other functions
 - Particularly relevant where users can create own accounts and can try these additional pages for vulnerabilities

Keeping Users logged in

- Even after closing a browser session, users often like to stay logged in
- Facilitated via a simple checkbox
 - "Remember me" or "Keep me logged in"
- How implemented? A persistent token is stored at user end

- Possession of token can bypass entire login process → tokens impossible to guess
- Vulnerability: predictable tokens
 - E.g. Concatenation of username and timestamp
 - Sometimes token are generated by hashing predictable values
 - If attacker can create their own account, they can examine cookie carefully
 - Can recover via dictionary attacks
- Techniques such as XSS (client-side attack) can also be used to steal such tokens

Resetting User Password

- Users can forget password → need to provide a way to reset them
 - Need to make sure the actual user is resetting, not someone else
- Some send new password by email
 - Not very secure since inboxes are not designed for secure storage!
- Send a unique password reset URL to users
 - E.g.
<http://vulnerable-website.com/reset-password?user=victim-user>
 - Attacker can change the user parameter to refer to any other username where they can potentially set their own password

- Generate hard-to-guess tokens

- E.g.

- <http://vulnerable-website.com/reset-password?token=a0ba0d1cb3b63d13822572fcff1a241895d893f659164d4cc550b421ebdd48a8>

- Implementation flaw: Maintain a pool of currently valid tokens (no user state maintained)

- Attacker tries to reset own password and gets a token
 - Attacker then constructs a POST request where
 - Attacker shares own token
 - But changes user to someone else along with new password
 - Server checks token validity from the pool and uses username from POST and changes the password of that user!

- When user visits URL, system should check whether this token valid against this user!
- Further, token should expire after a short period of time or immediately after the password has been reset

Changing User Password

- Reset password: User doesn't remember password
- Change password: user remembers password
- Changing involves entering current password and then the new password twice
 - Like a normal login page, website checks that username and current password matches
 - Then it updates the password
- Similar brute force attacks as on login page are possible here as well

Brute forcing password via change password URL:

- Implementation flaw:
 - Wrong current password; two entries for new password match → account locked
 - Wrong current password; two entries for new password do not match → current password incorrect
 - Correct current password; two entries for new password do not match → new passwords do not match

- Attack:
 - Choose a username whose password you want to crack
 - Set two non matching new passwords
 - Enumerate various passwords under the current password field
 - Whatever password results in “new passwords do not match” is the correct password

Outline

- ~~Background~~
- ~~Causes of Vulnerabilities and their Impact~~
- Common Vulnerabilities and safeguards
 - ~~Vulnerabilities in password-based login~~
 - ~~Vulnerabilities in multi-factor authentication~~
 - ~~Vulnerabilities in other authentication mechanisms~~
- Overall Best Practices

Best Practices

Not possible to enumerate all safeguards. Some general principles

- Always send login data over encrypted connections (https)
- Ensure no username or email addresses are disclosed through publicly accessible profiles (leads to username enumeration)
- Implement an effective password policy

As per NIST Special Publication 800-63B on Digital Identity (Aug 2024)

- Length Over Complexity:
 - Minimum Length: At least 8 characters
 - Support up to 64 characters to allow passphrases
- Avoid Composition Rules: Do not enforce mandatory use of uppercase, numbers, or special characters, as this can lead to predictable patterns
- Screen Passwords:
 - Check Against Banned Lists
 - Prevent use of commonly used, compromised, or easily guessable passwords

- Allow All Character Types: Support a wide range of characters, including spaces and Unicode, to enable complex passphrases
- Password Storage: Store passwords using strong, salted cryptographic hashes (e.g., bcrypt, Argon2)
- In high security settings, make users change passwords periodically and do not allow use of older passwords!

- Use identical, generic error messages, and make sure they really are identical!
- Return same HTTP status code with each login request
- Make the response times in different scenarios as indistinguishable as possible
- Implement robust brute-force protection
 - Implement strict, IP-based user rate limiting
 - Include CAPTCHA test with login attempt after a certain limit is reached!

- Triple-check verification logic
 - Don't forget supplementary functionality (reset/change password)
- Use multi-factor authentication if feasible!
 - Much more secure than password-based login alone
 - But don't use the same factor across all!
 - Use a dedicated device or app that generates the verification code directly (rather than SMS)
 - Logic also should be without flaws!

- Use MFA for account recovery
 - Avoid knowledge-based authentication (e.g., security questions) due to vulnerability to social engineering
- Session Management
 - Use strong, unpredictable session identifiers
 - Implement Secure, HttpOnly, and SameSite cookie attribute
 - Set appropriate session timeouts based on sensitivity of the accessed resources

- Continuous Monitoring and Incident Response
 - Track and analyze login attempts, successes, and failures
 - Have procedures in place to handle authentication breaches, including notifying affected users and resetting credentials
- Conduct Regular Security Audits i.e. periodically review and test authentication systems
- Refer to NIST document on Digital Identity for more details:

<https://pages.nist.gov/800-63-4/sp800-63b.html>

Real Life Examples

- Improper Authentication - any user can login as other user with otp/logout & otp/login:
<https://hackerone.com/reports/921780>
- Bypassing GitLab Two-Factor Authentication:
<https://hackerone.com/reports/128085/>
- Auth Bypass = Username Enumeration + Login Brute Force: <https://hackerone.com/reports/209008>

Summary

- Authentication an important part of access control
 - Often implemented via POST payload followed by token based session management
- Discussed various vulnerabilities in password, multi-factor based authentication and in other mechanisms
- Covered overall best practices as well

References

- <https://portswigger.net/web-security/authentication>
- https://cheatsheetseries.owasp.org/cheatsheets/Authentication_Cheat_Sheet.html