VPC Transit Gateway Peering.

Transit Gateway Peering is a networking feature that connects two **AWS Transit Gateway** instances across regions or accounts, allowing traffic to flow between their attached VPCs and networks.

I have created two VPC's in two different regions.

VPC – 1 (Mumbai)

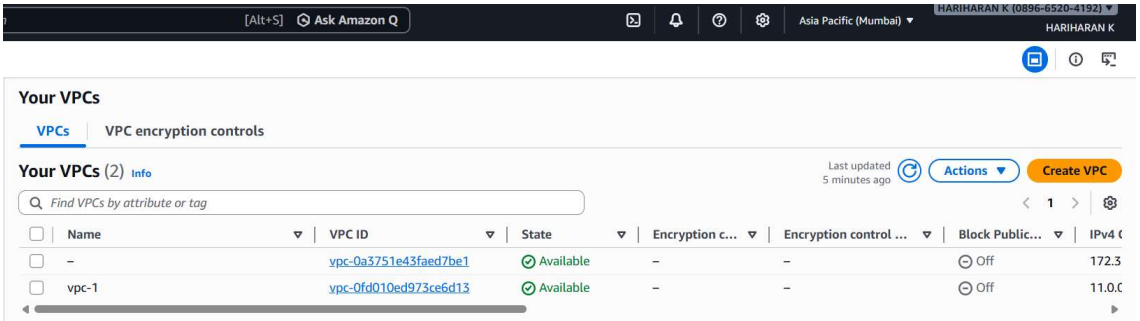

VPC – 2 (hyderabad)

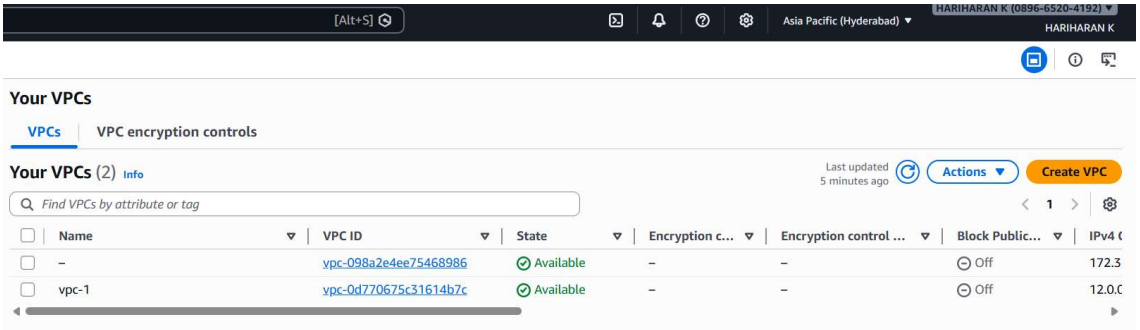

Transit gateway Creation in Two Different Regions.

TGA – 1 (Mumbai)

tga-1	tgw-attach-085bbcef1e1a20ad8	tgw-075c515c00a11a8b4	Available	VPC	vpc-0fd010ed973ce6d13

TGA – 2 (Hyderabad)

tga-1	tgw-attach-0a86ca28ea21fcf01	tgw-000a9bb5a4b0296cb	Available	VPC	vpc-0d770675c31614b7c

Then Creating Peering Request.

Details

Name tag - *optional*
Creates a tag with the key set to Name and the value set to the specified string.
tga-peering

Transit gateway ID | Info
tgw-075c515c00a11a8b4

Attachment type | Info
Peering connection

Peering connection attachment
Select and configure your peering connection attachment.

Account | Info
My account
Other account

Region | Info
Asia Pacific (Hyderabad) (ap-south-2)

Transit gateway (accepter) | Info
tgw-000a9bb5a4b0296cb

the created Peering Request.

You successfully created peering attachment tgw-attach-04f3c87e022535831 / tga-peering.

You can visualize and monitor your Transit Gateway(s) from the AWS Network Manager. Register your Transit Gateway by creating a global network to get started.

Transit gateway attachments (1/2) Info

Actions | Create transit gateway attachment

Find transit gateway attachment by attribute or tag

Name	Transit gateway attachment ID	Transit gateway ID	State	Resource type	Resource ID
tga-peering	tgw-attach-04f3c87e022535831	tgw-075c515c00a11a8b4	Pending acceptance	Peering	tgw-000a9bb5a4b0296cb
tga-1	tgw-attach-085bbcef1e1a20ad8	tgw-075c515c00a11a8b4	Available	VPC	vpc-0fd010ed973ce6d13

Accepting the peering request.

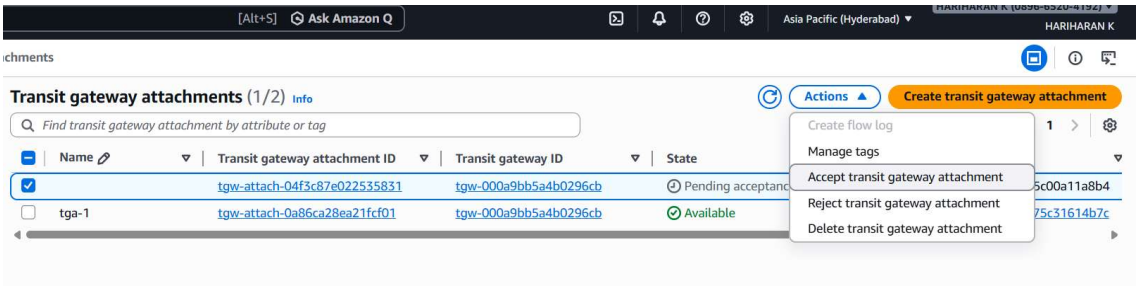

Then we have to accept the request from the Requestor Attachment.

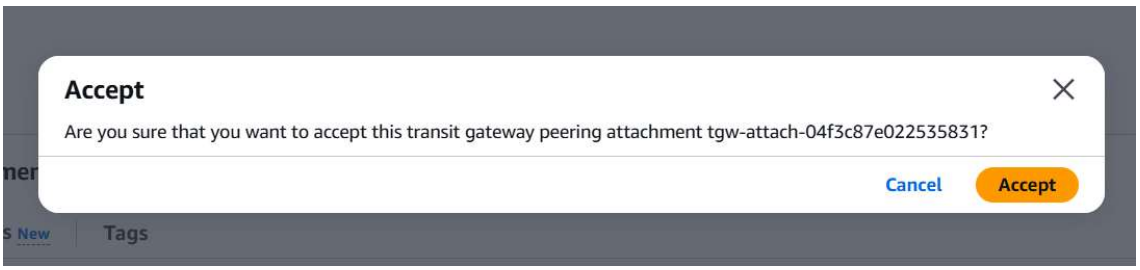

Then we have the available state of Peering.

TGA – 1(mumbai)

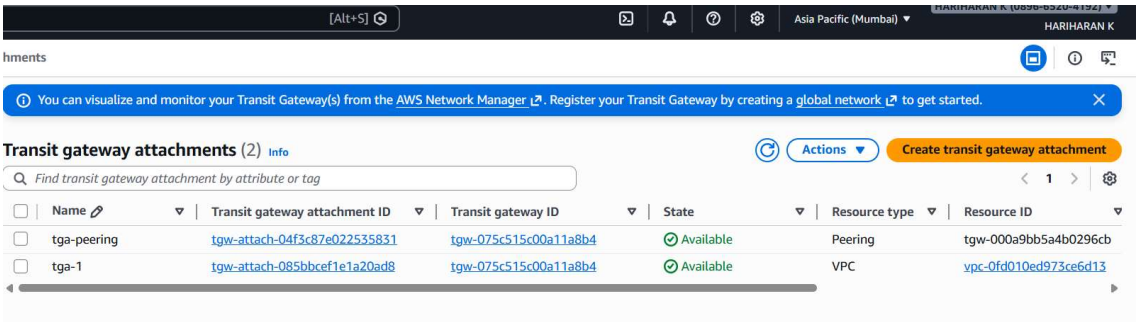

TGA – 2 (hyderabad)

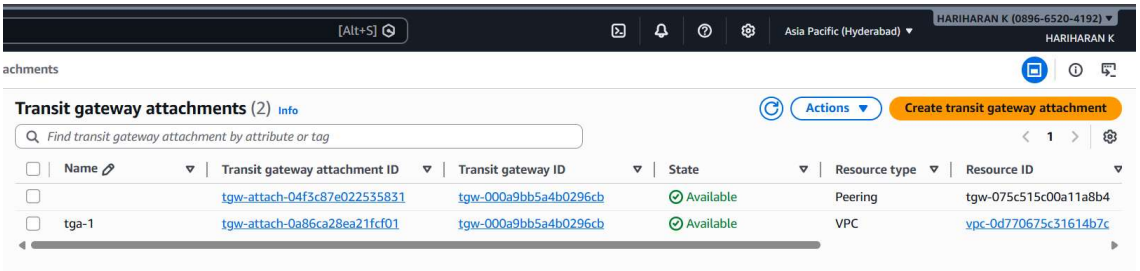

Then we have to change the Transit Gateway Route Table for routing through the VPC's.

TGA – 1(Mumbai)

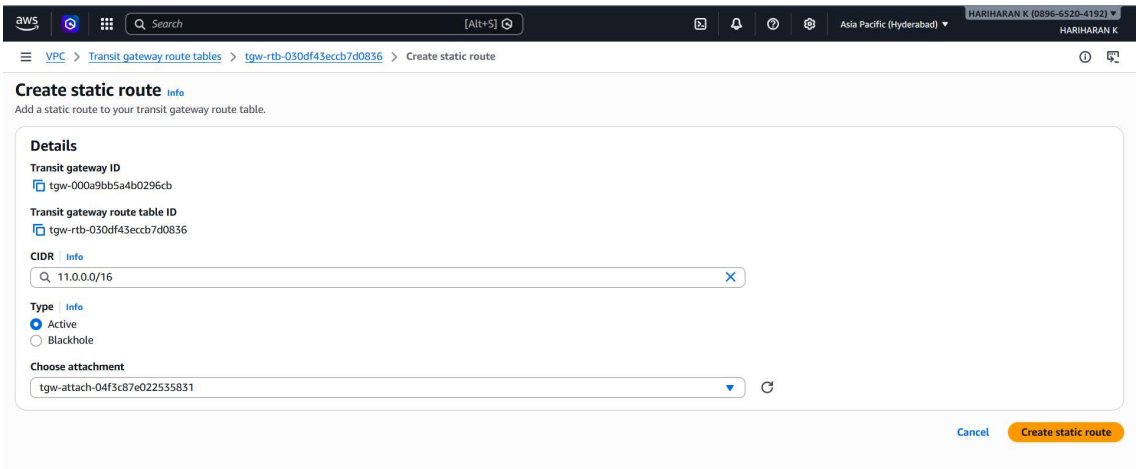

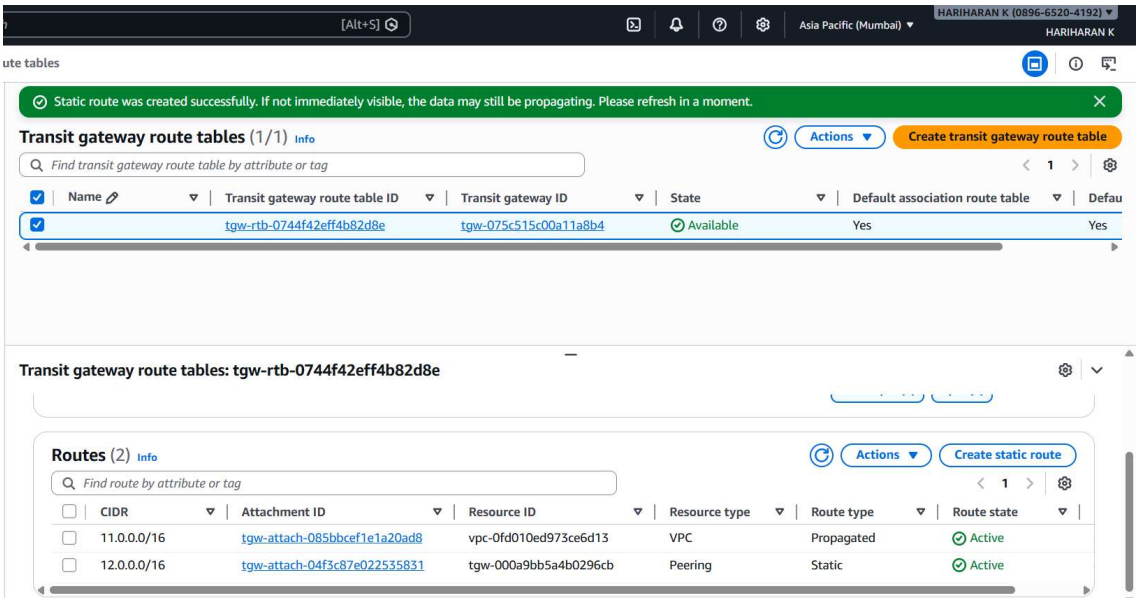

TGA – 2(hyderabad)

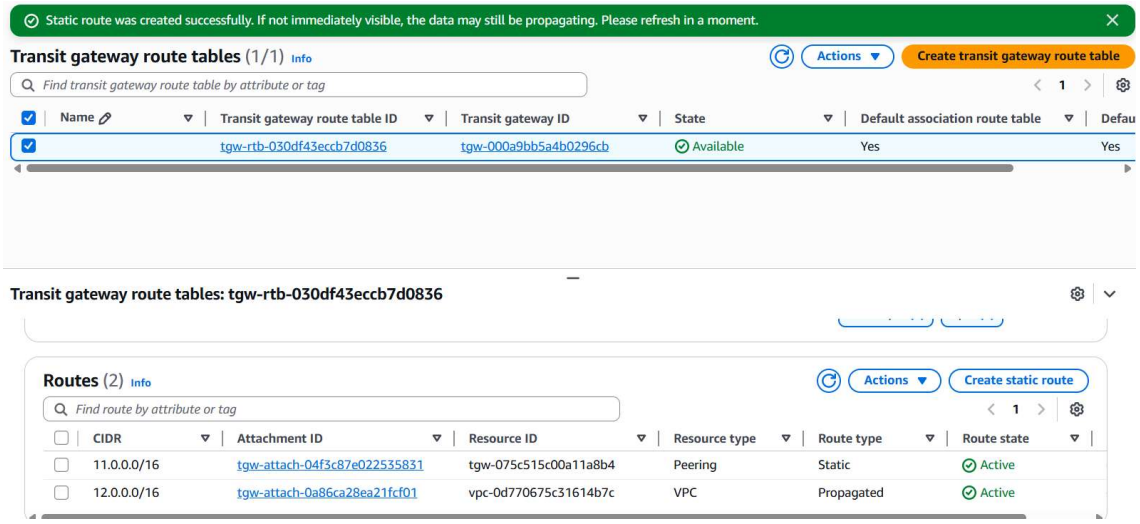

Then we have connected two VPC's From different regions by using the Transit Gateway Attachments.

TGA – 1

```
        _/m/'
[ec2-user@ip-11-0-0-12 ~]$ ping 12.0.0.25
PING 12.0.0.25 (12.0.0.25) 56(84) bytes of data.
64 bytes from 12.0.0.25: icmp_seq=533 ttl=124 time=19.4 ms
64 bytes from 12.0.0.25: icmp_seq=534 ttl=124 time=15.3 ms
64 bytes from 12.0.0.25: icmp_seq=535 ttl=124 time=15.3 ms
64 bytes from 12.0.0.25: icmp_seq=536 ttl=124 time=15.3 ms
64 bytes from 12.0.0.25: icmp_seq=537 ttl=124 time=15.2 ms
64 bytes from 12.0.0.25: icmp_seq=538 ttl=124 time=15.3 ms
64 bytes from 12.0.0.25: icmp_seq=539 ttl=124 time=15.3 ms
64 bytes from 12.0.0.25: icmp_seq=540 ttl=124 time=15.3 ms
64 bytes from 12.0.0.25: icmp_seq=541 ttl=124 time=15.2 ms
64 bytes from 12.0.0.25: icmp_seq=542 ttl=124 time=15.3 ms
64 bytes from 12.0.0.25: icmp_seq=543 ttl=124 time=15.2 ms
64 bytes from 12.0.0.25: icmp_seq=544 ttl=124 time=15.3 ms
64 bytes from 12.0.0.25: icmp_seq=545 ttl=124 time=15.3 ms
64 bytes from 12.0.0.25: icmp_seq=546 ttl=124 time=15.3 ms
64 bytes from 12.0.0.25: icmp_seq=547 ttl=124 time=15.2 ms
64 bytes from 12.0.0.25: icmp_seq=548 ttl=124 time=15.3 ms
64 bytes from 12.0.0.25: icmp_seq=549 ttl=124 time=15.3 ms
64 bytes from 12.0.0.25: icmp_seq=550 ttl=124 time=15.3 ms
64 bytes from 12.0.0.25: icmp_seq=551 ttl=124 time=15.3 ms
64 bytes from 12.0.0.25: icmp_seq=552 ttl=124 time=15.3 ms
64 bytes from 12.0.0.25: icmp_seq=553 ttl=124 time=15.4 ms
```

i-049de8357e8659d75 (my-server)

PublicIPs: 13.203.26.110 PrivateIPs: 11.0.0.12

TGA – 2

```
          _/ _/
        _/m/'
[ec2-user@ip-11-0-0-12 ~]$ ping 12.0.0.25
PING 12.0.0.25 (12.0.0.25) 56(84) bytes of data.
64 bytes from 12.0.0.25: icmp_seq=533 ttl=124 time=19.4 ms
64 bytes from 12.0.0.25: icmp_seq=534 ttl=124 time=15.3 ms
64 bytes from 12.0.0.25: icmp_seq=535 ttl=124 time=15.3 ms
64 bytes from 12.0.0.25: icmp_seq=536 ttl=124 time=15.3 ms
64 bytes from 12.0.0.25: icmp_seq=537 ttl=124 time=15.2 ms
64 bytes from 12.0.0.25: icmp_seq=538 ttl=124 time=15.3 ms
64 bytes from 12.0.0.25: icmp_seq=539 ttl=124 time=15.3 ms
64 bytes from 12.0.0.25: icmp_seq=540 ttl=124 time=15.3 ms
64 bytes from 12.0.0.25: icmp_seq=541 ttl=124 time=15.2 ms
64 bytes from 12.0.0.25: icmp_seq=542 ttl=124 time=15.3 ms
64 bytes from 12.0.0.25: icmp_seq=543 ttl=124 time=15.2 ms
64 bytes from 12.0.0.25: icmp_seq=544 ttl=124 time=15.3 ms
64 bytes from 12.0.0.25: icmp_seq=545 ttl=124 time=15.3 ms
64 bytes from 12.0.0.25: icmp_seq=546 ttl=124 time=15.3 ms
64 bytes from 12.0.0.25: icmp_seq=547 ttl=124 time=15.2 ms
64 bytes from 12.0.0.25: icmp_seq=548 ttl=124 time=15.3 ms
64 bytes from 12.0.0.25: icmp_seq=549 ttl=124 time=15.3 ms
64 bytes from 12.0.0.25: icmp_seq=550 ttl=124 time=15.3 ms
64 bytes from 12.0.0.25: icmp_seq=551 ttl=124 time=15.3 ms
64 bytes from 12.0.0.25: icmp_seq=552 ttl=124 time=15.3 ms
64 bytes from 12.0.0.25: icmp_seq=553 ttl=124 time=15.4 ms
```

i-049de8357e8659d75 (my-server)

PublicIPs: 13.203.26.110 PrivateIPs: 11.0.0.12