


Assessment - 5 (Docker and Kubernetes)

1. Create a Dockerfile that does the following:

- o Uses an Ubuntu base image.
- o Installs necessary dependencies including Java.
- o Downloads and configures Apache Tomcat.
- o Copies a sample index.html file or web application (optional: your own WAR file) into the Tomcat webapps directory.
- o Configures the container to expose the default Tomcat port

Docker file :

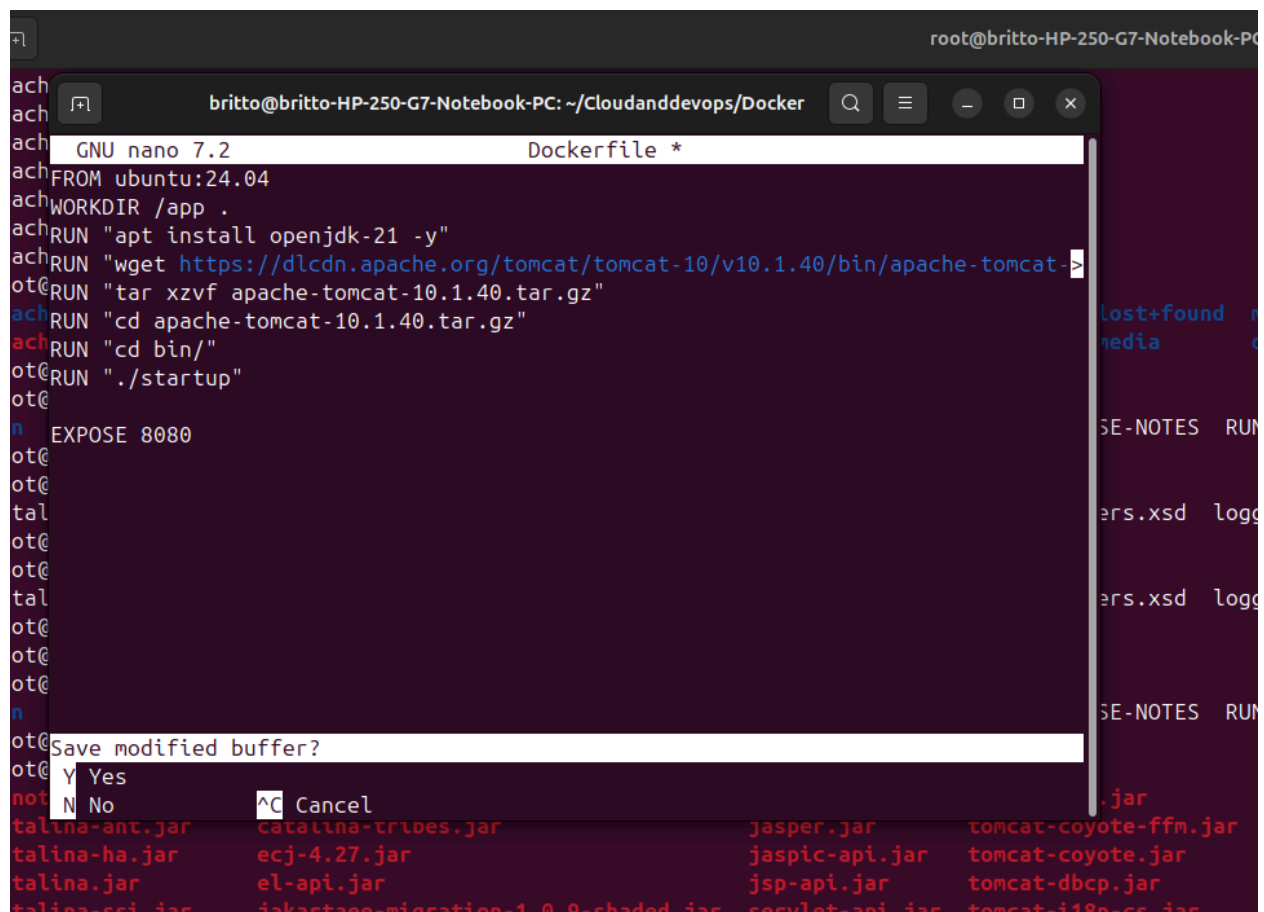

The screenshot shows a terminal window with a nano editor editing a file named 'Dockerfile *'. The terminal title bar indicates the user is 'britto' on a 'britto-HP-250-G7-Notebook-PC' in the directory '~/Cloudanddevops/Docker'. The Dockerfile content is as follows:

```
FROM ubuntu:24.04
WORKDIR /app
RUN "apt install openjdk-21 -y"
RUN "wget https://dlcdn.apache.org/tomcat/tomcat-10/v10.1.40/bin/apache-tomcat-10.1.40.tar.gz"
RUN "tar xzvf apache-tomcat-10.1.40.tar.gz"
RUN "cd apache-tomcat-10.1.40.tar.gz"
RUN "cd bin/"
RUN "./startup"

EXPOSE 8080
```

A prompt 'Save modified buffer?' is visible at the bottom of the editor, with options 'Y Yes', 'N No', and '^C Cancel'.

2. Build a Docker image from the Dockerfile and tag it appropriately (e.g., yourdockerhubusername/tomcat-app:latest).

Commands :

```
docker build -t tomcat-server .
docker tag tomcat-server britto77/tomcat-server:v1.0
```

3. Push the Docker image to Docker Hub.

Command

```
docker push britto77/tomcat-server:v1.0
```