

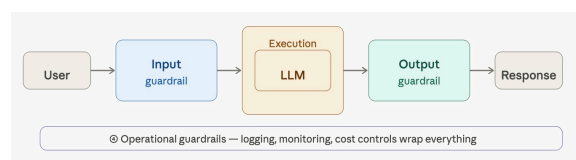
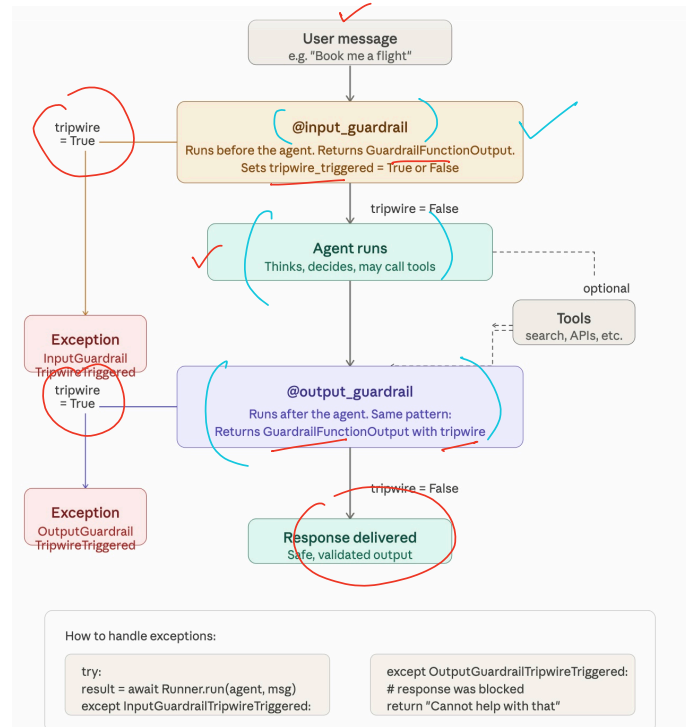


OpemAI - Agent SDK - Guardrails

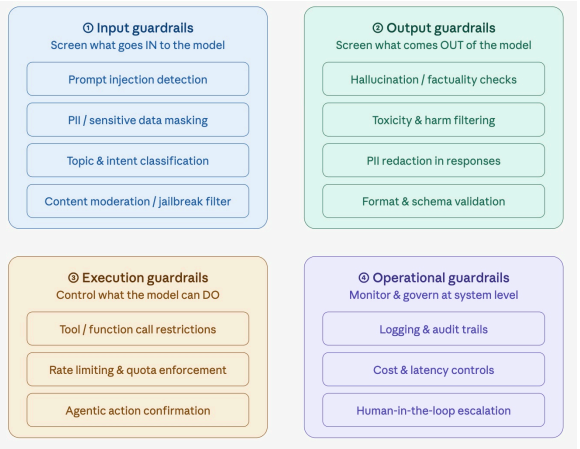

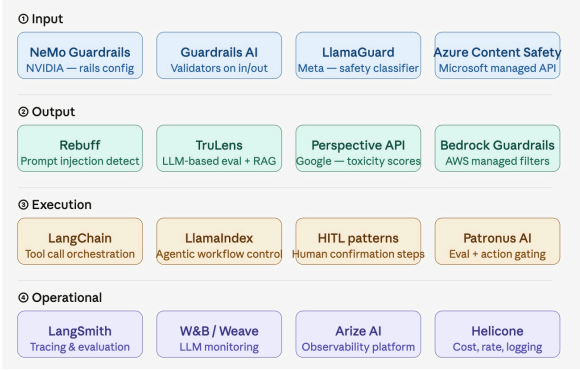

Concept	OpenAI Agents SDK	LangChain
1  Core pattern	GuardrailFunctionOutput You return a <u>GuardrailFunctionOutput</u> object from your guardrail function.	Middleware You return a dict (or None) from your middleware.
2  When it runs	@input_guardrail / @output_guardrail Runs before the agent processes input or after it generates output.	before_agent / after_agent Runs before the agent or after the agent responds.
3  How you block	tripwire_triggered=True Raises an exception that you catch with try/except.	return {"jump_to": "end"} Short-circuits silently and returns your custom response.
4  How you allow	tripwire_triggered=False The agent continues normally.	return None The agent continues normally.
5  Built-in guardrails	None — you build everything Full flexibility. You create whatever guardrails you need.	PIIMiddleware, HumanInTheLoopMiddleware, etc. Ready-to-use middleware for common safety and control needs.
6  Two syntaxes	No — one way only One decorator-based way to <u>define guardrails</u>.	Yes — two ways Both <u>class-based middleware</u> and <u>decorator-based middleware</u>.

MCP $\rightarrow$ Model Context Protocol


inflation

Primitives

Architecture


Communicate



Demo

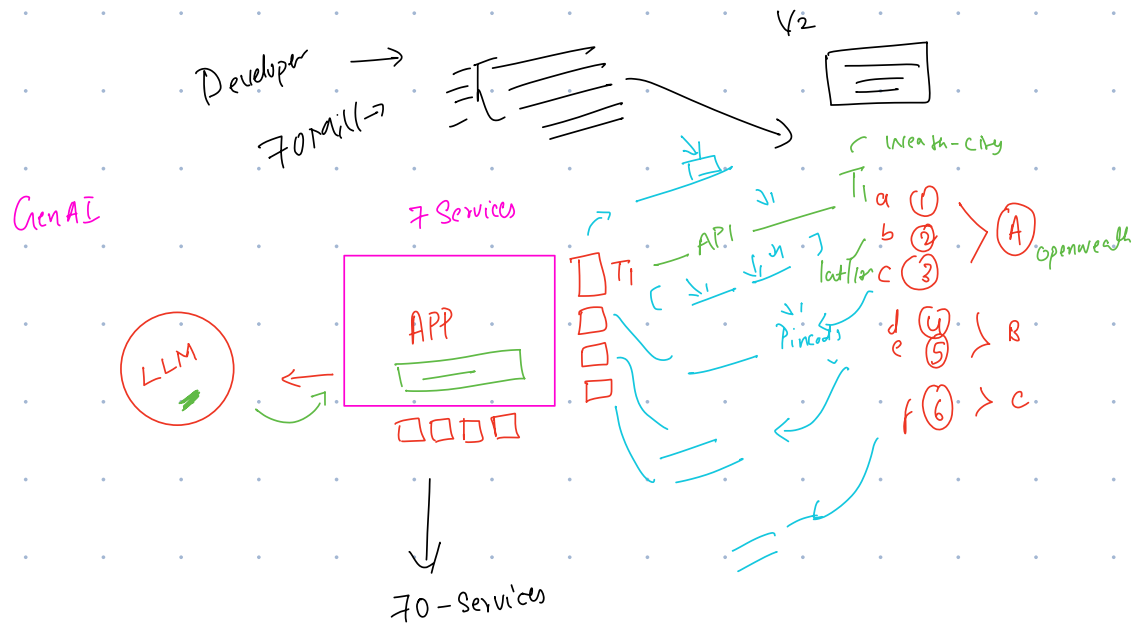


Type-C
↳ Universal

↳ Claude → MCP?



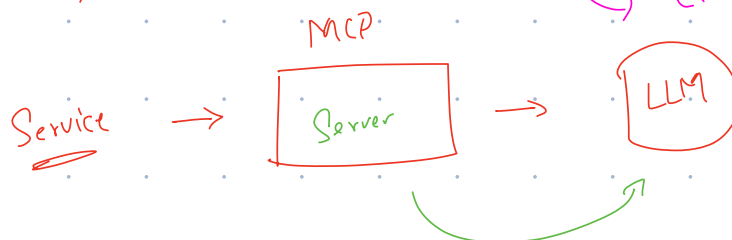


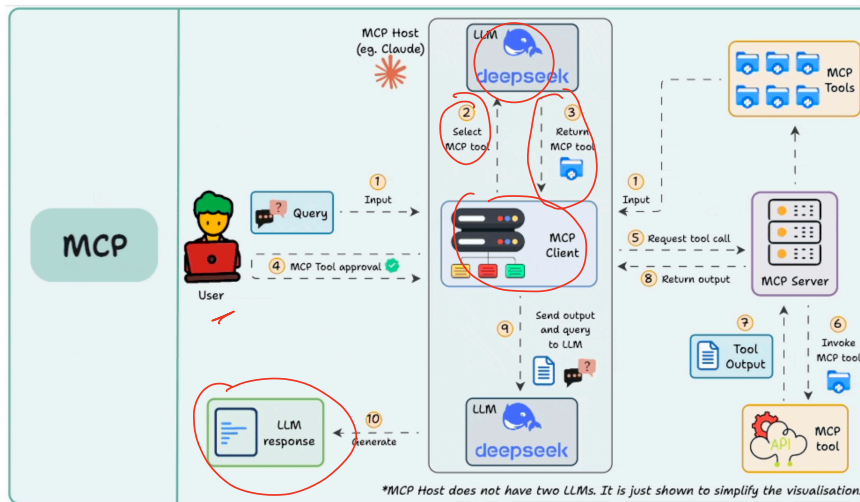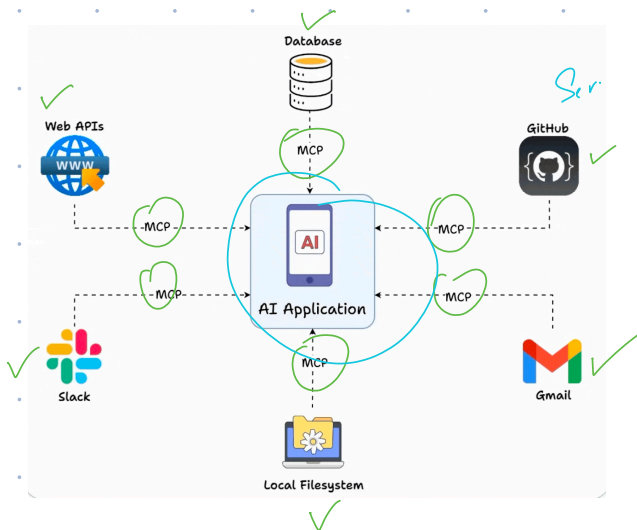

MCP.

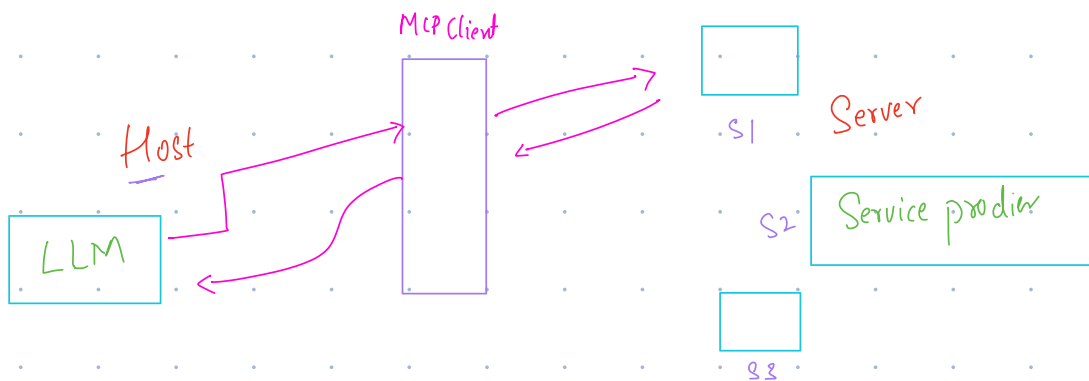

Soc, Parallelism

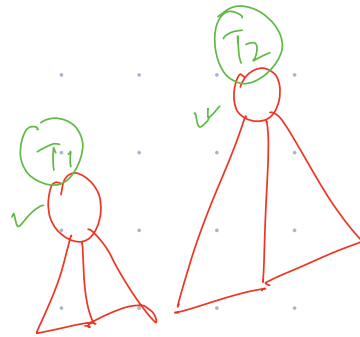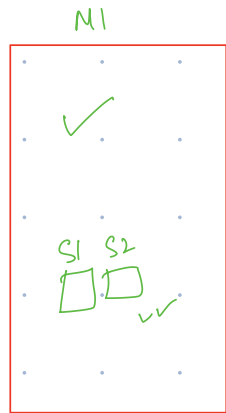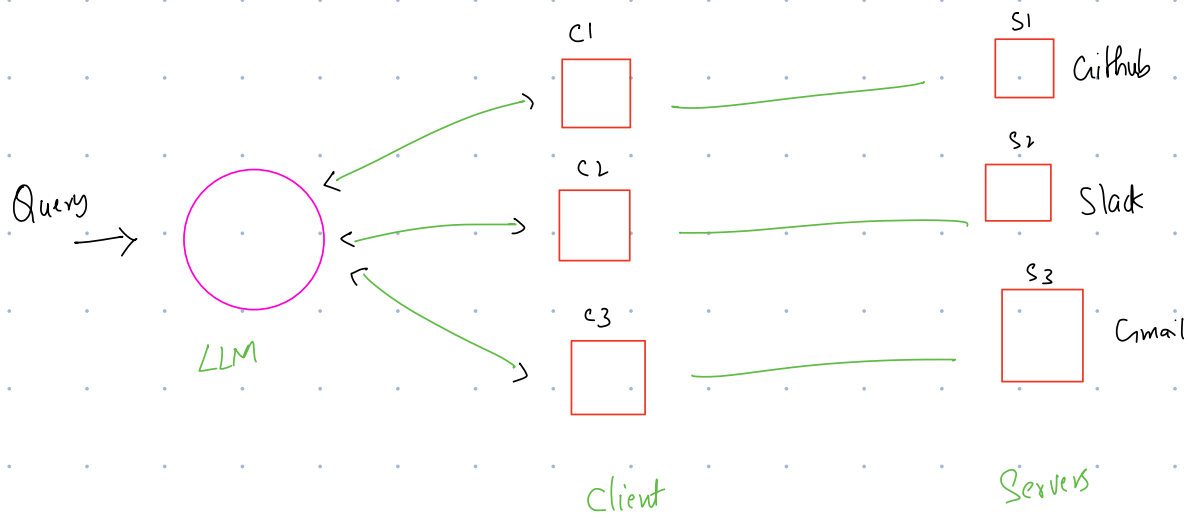

Service provider
↳ GitHub

3 Primitives → MCP Servers

①

Tools

/list-tools



②

Document

Documentation

—

③

Template

[print]
—
—
—

call level TI

Communication

HTTP / SSE — Server
 ↑
 Host —> Remotely

stdio —> Server
 locally —>
 Host

JSON → RPC 2.0