




1.

```
To run a command as administrator (user "root"), use "sudo <command>".  
See "man sudo_root" for details.  
lbab@IBAB-Workshop-Comp015: $
```

2.

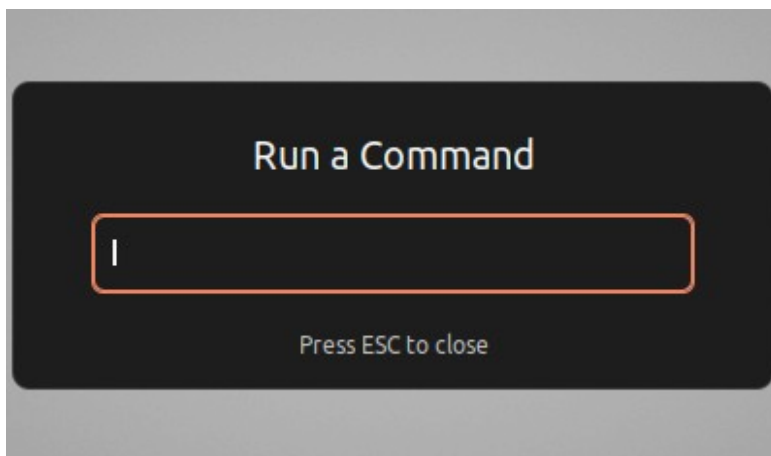

3.

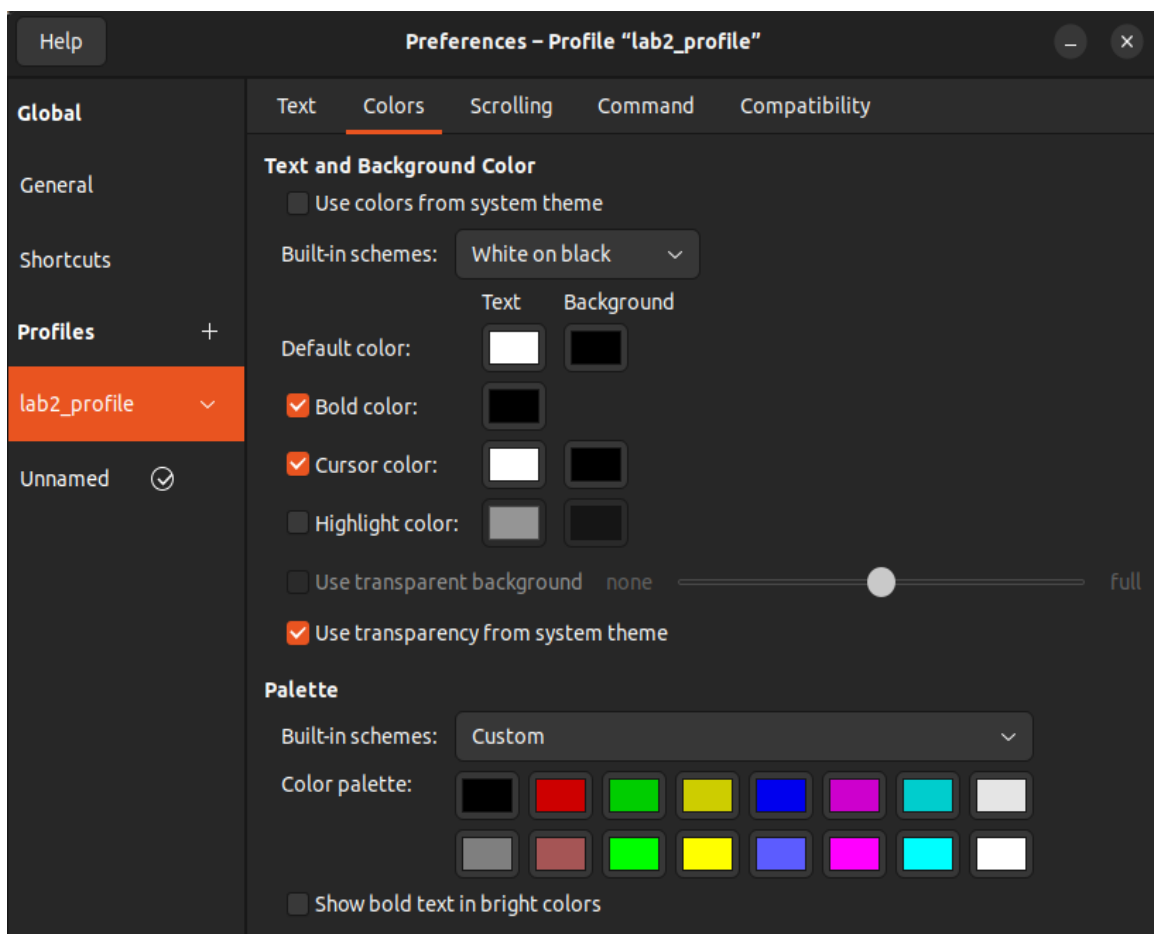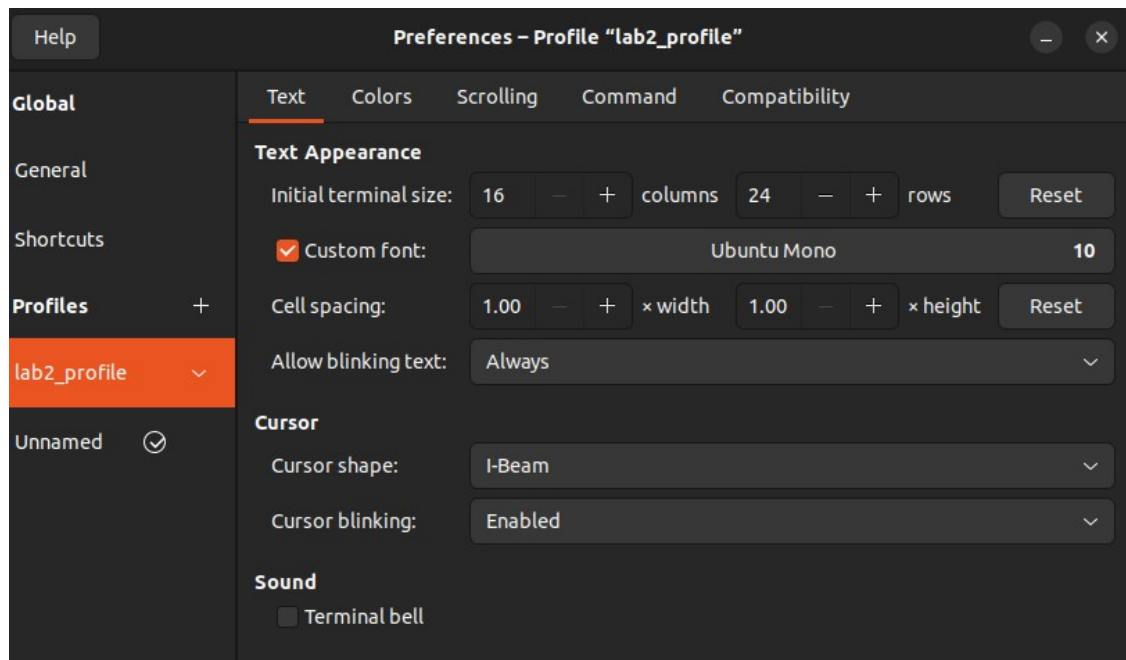

To run a command as administrator (user "root"), use "sudo <command>".
See "man sudo_root" for details.

```
ibab@IBAB-Workshop-Comp015:~$ export PS1="\u\H :"  
ibab@IBAB-Workshop-Comp015 : export PS1="\u>"  
ibab> ^C  
ibab> export PS1="\u@\H :"  
ibab@IBAB-Workshop-Comp015 :export PS1="\u> \s\v :"  
ibab> bash5.1 : export PS1="\u@\H \d"  
ibab@IBAB-Workshop-Comp015 Fri Jul 18 export PS!="\u@\H \d\t"  
bash: export: `PS!="\u@\H \d\t': not a valid identifier  
ibab@IBAB-Workshop-Comp015 Fri Jul 18export PS1="\u@\H \d\t"  
ibab@IBAB-Workshop-Comp015 Fri Jul 1816:14:26export PS1="\u \d \R"  
ibab Fri Jul 18 \R export PS1="\u \d \T"  
ibab Fri Jul 18 04:15:26 export PS1="\u @\H \A :"  
ibab @IBAB-Workshop-Comp015 16:16 :export PS1 =" \W>"  
bash: export: `= \W>': not a valid identifier  
ibab @IBAB-Workshop-Comp015 16:16 : export PS1 =" \W >"  
bash: export: `= \W >': not a valid identifier  
ibab @IBAB-Workshop-Comp015 16:17 : export PS1="\W>"  
~>
```

To run a command as administrator (user "root"), use "sudo <command>".
See "man sudo_root" for details.

```
ibab@IBAB-Workshop-Comp015:~$ export PS1="\e[0;32m[\u@\h \W]$ \e[0m"  
[ibab@IBAB-Workshop-Comp015 ~]$ export PS1="\e[4;34m[\u@\h \W]$ \e[0m"  
ibab@IBAB-Workshop-Comp015 ~]$ export PS1="\e[4;34m[\u@\h \W]$ \e[0m"  
[ibab@IBAB-Workshop-Comp015 ~]$ export PS1="\e[4;34,31m[\u@\h \W]$ \e[0m"
```